

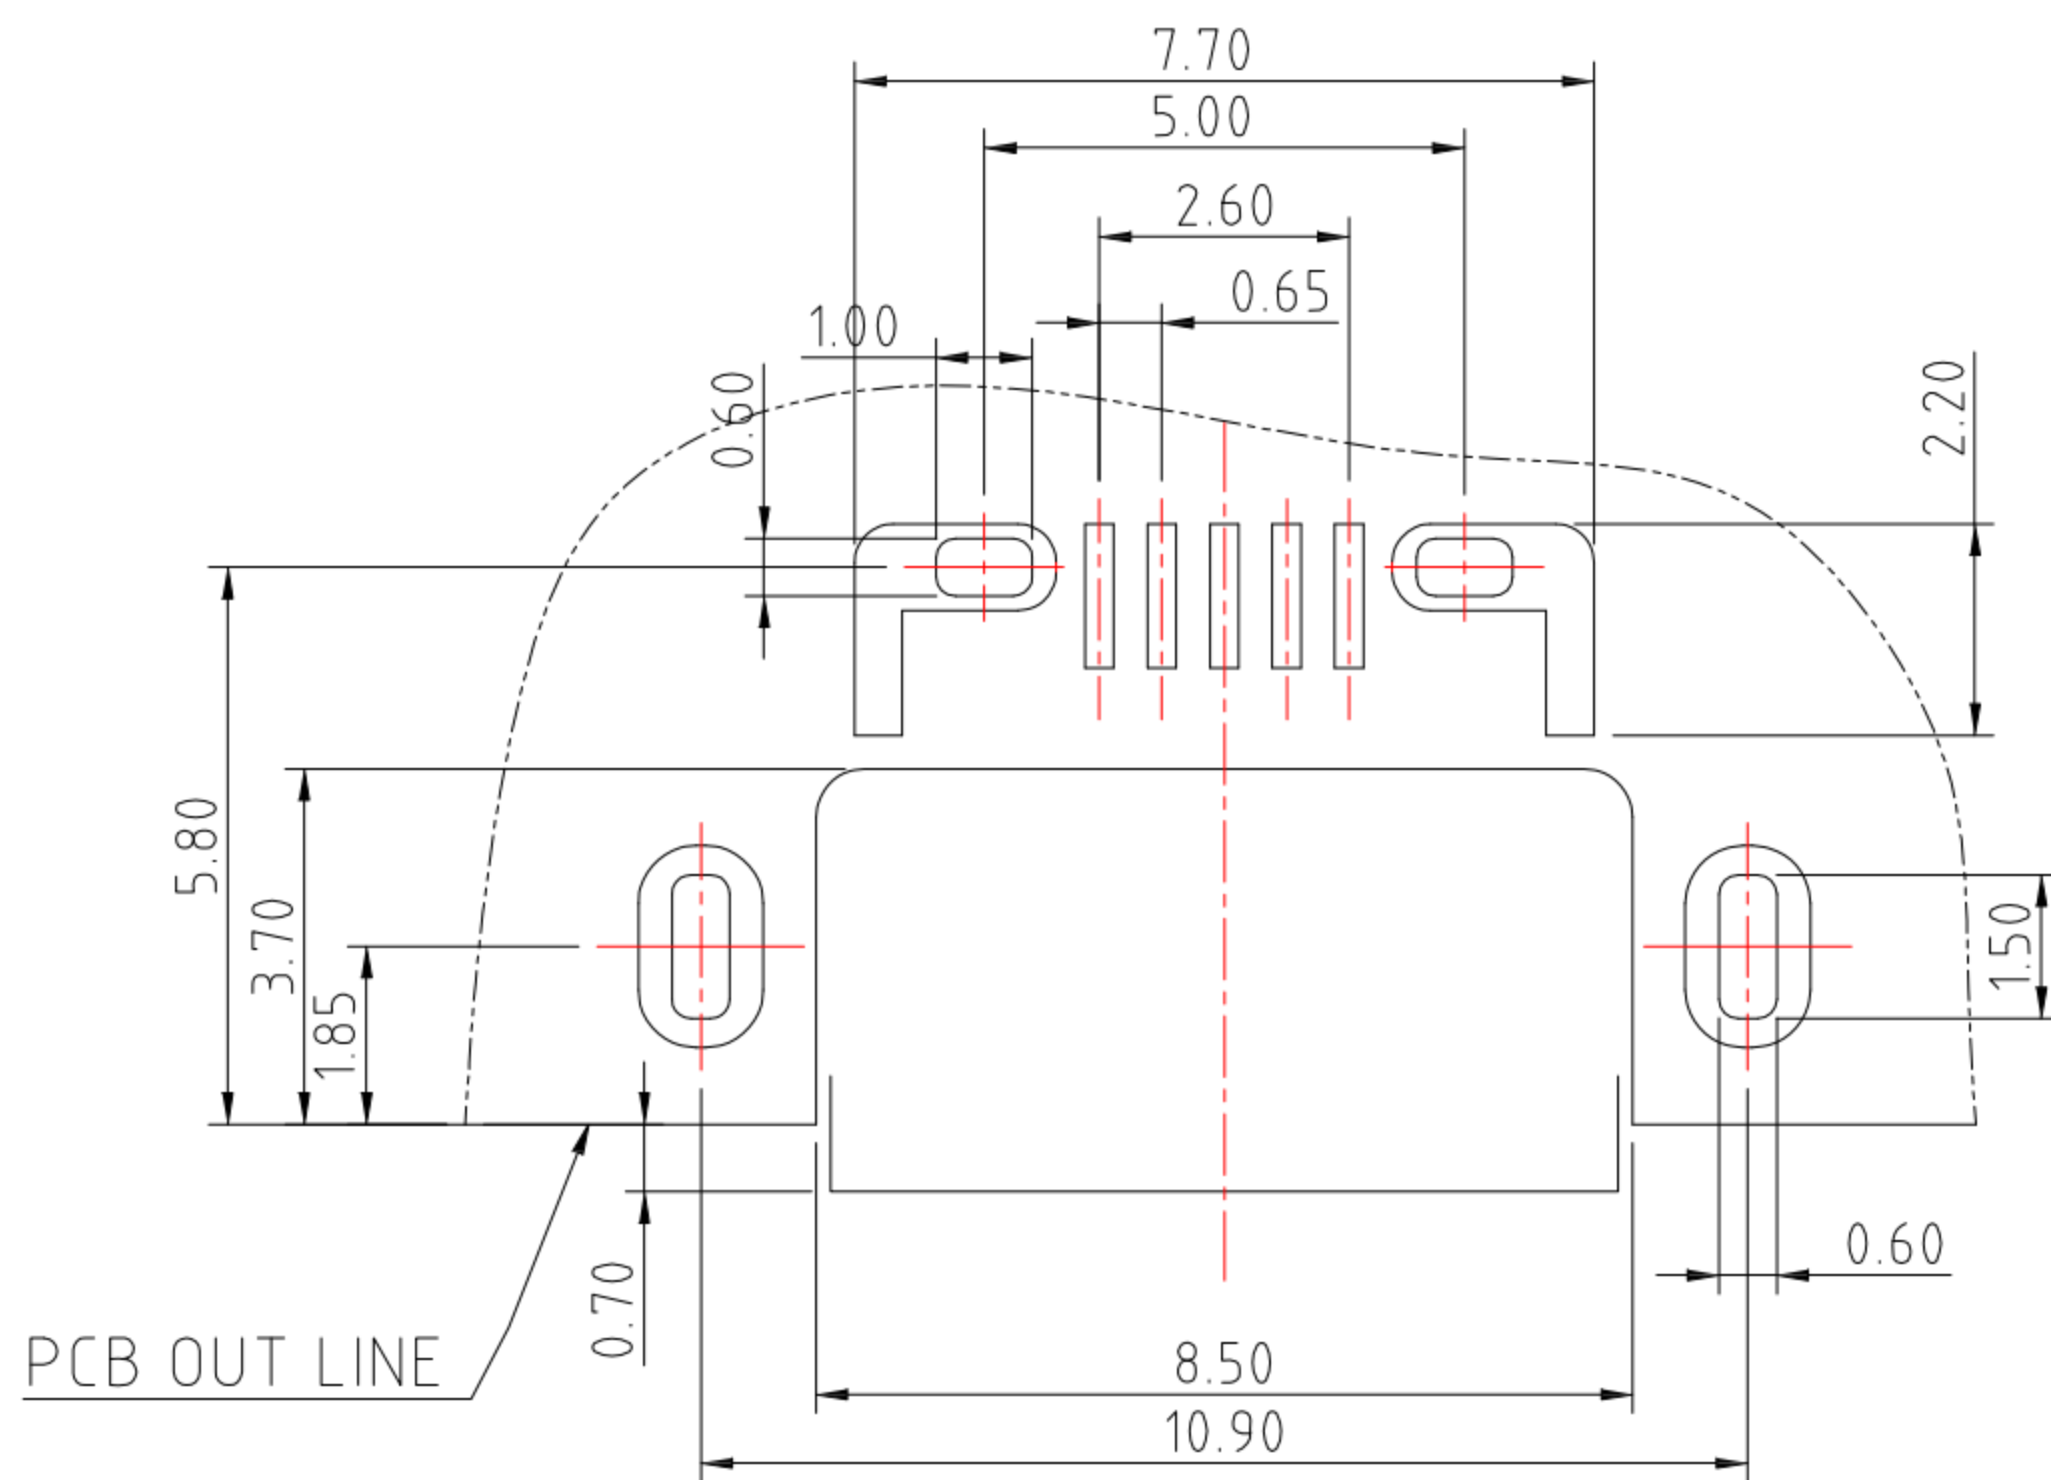
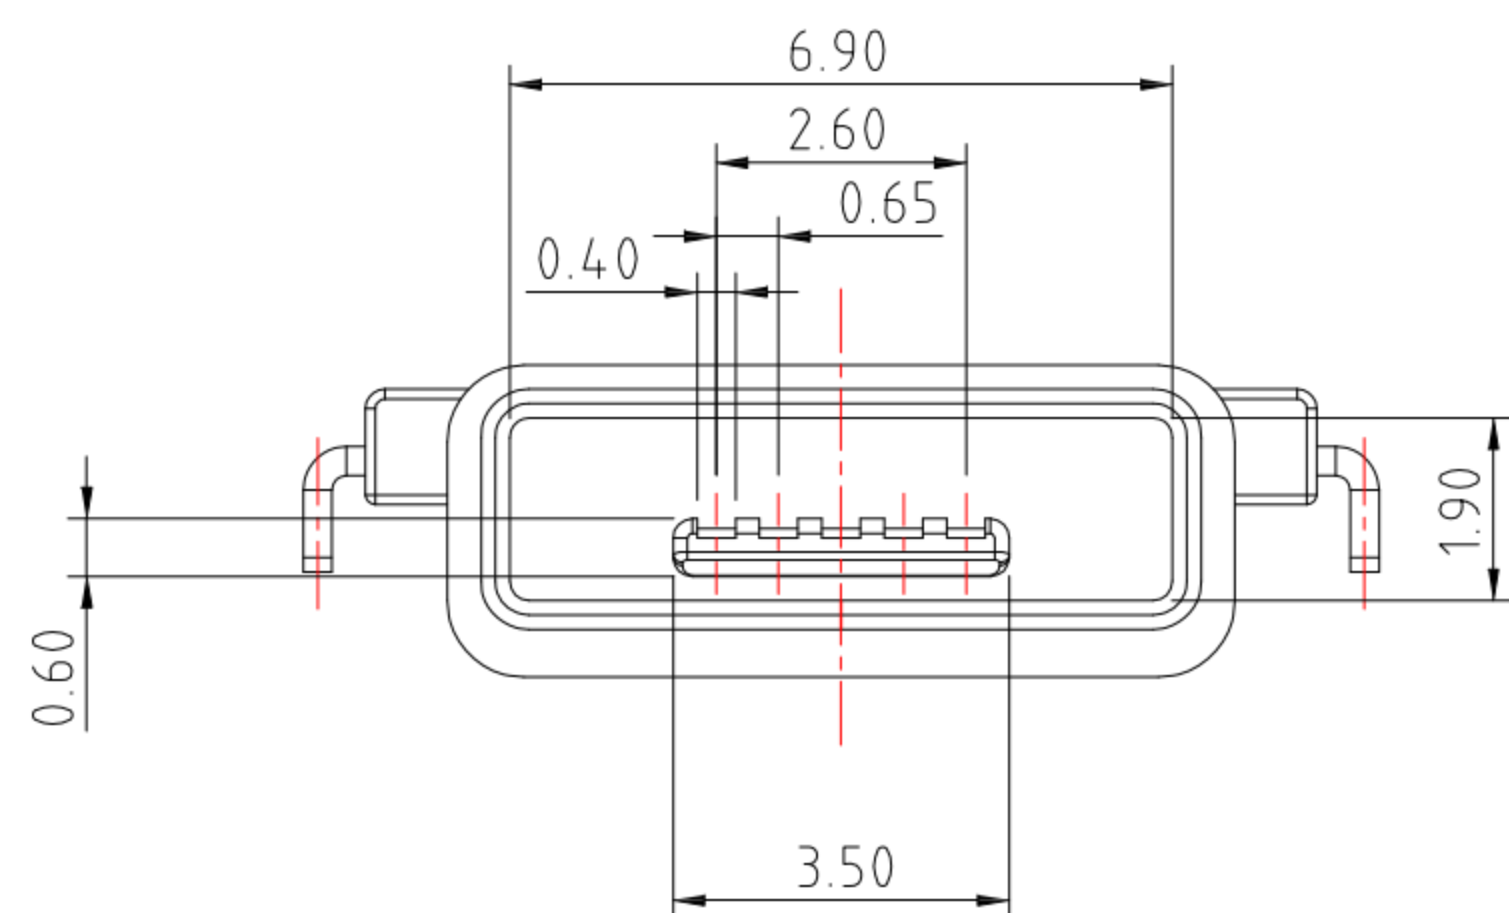
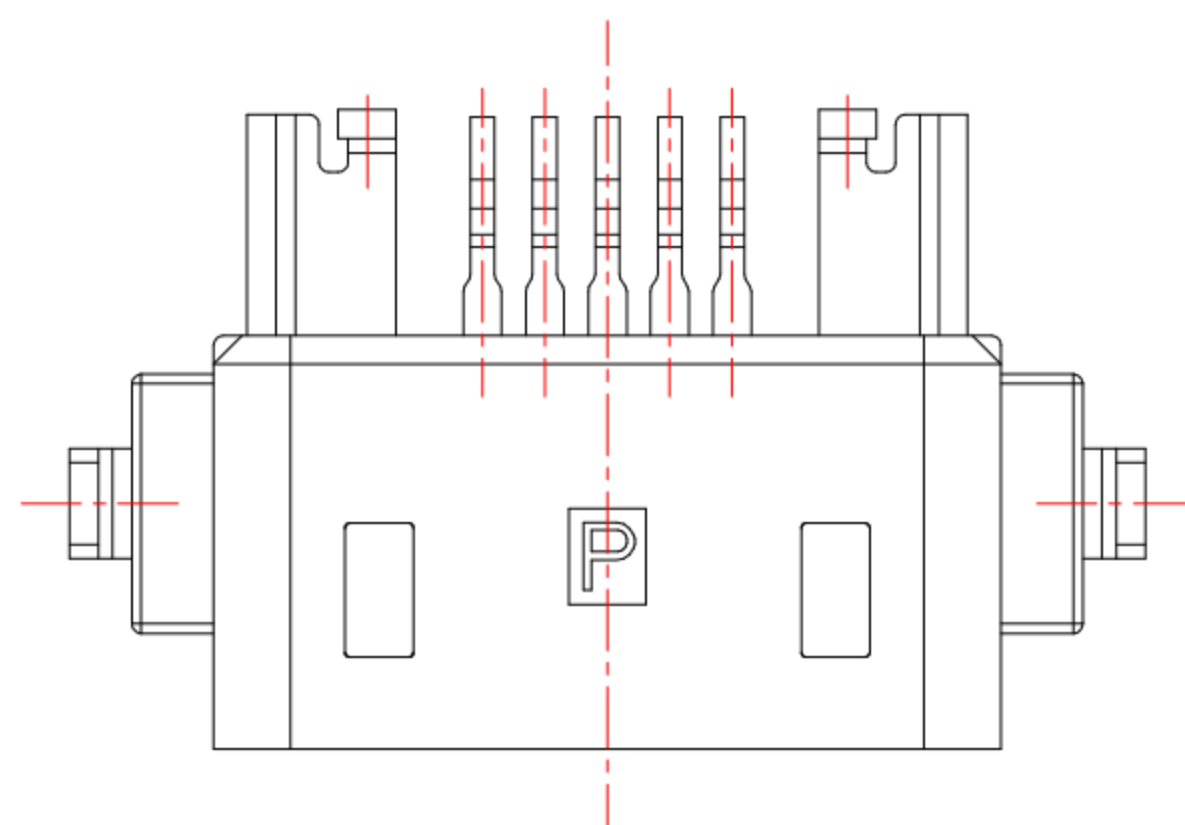
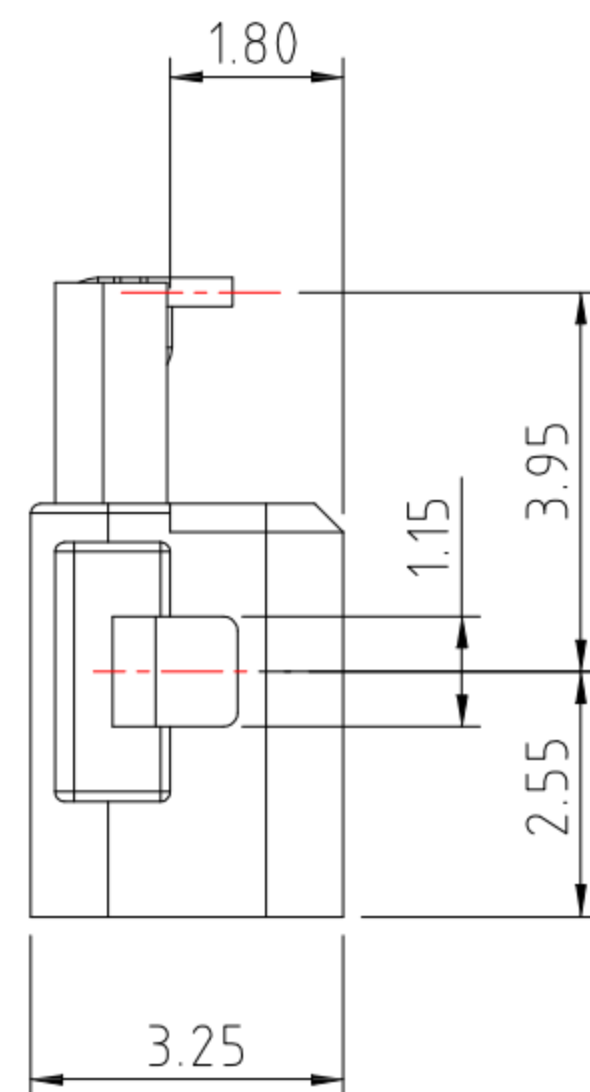
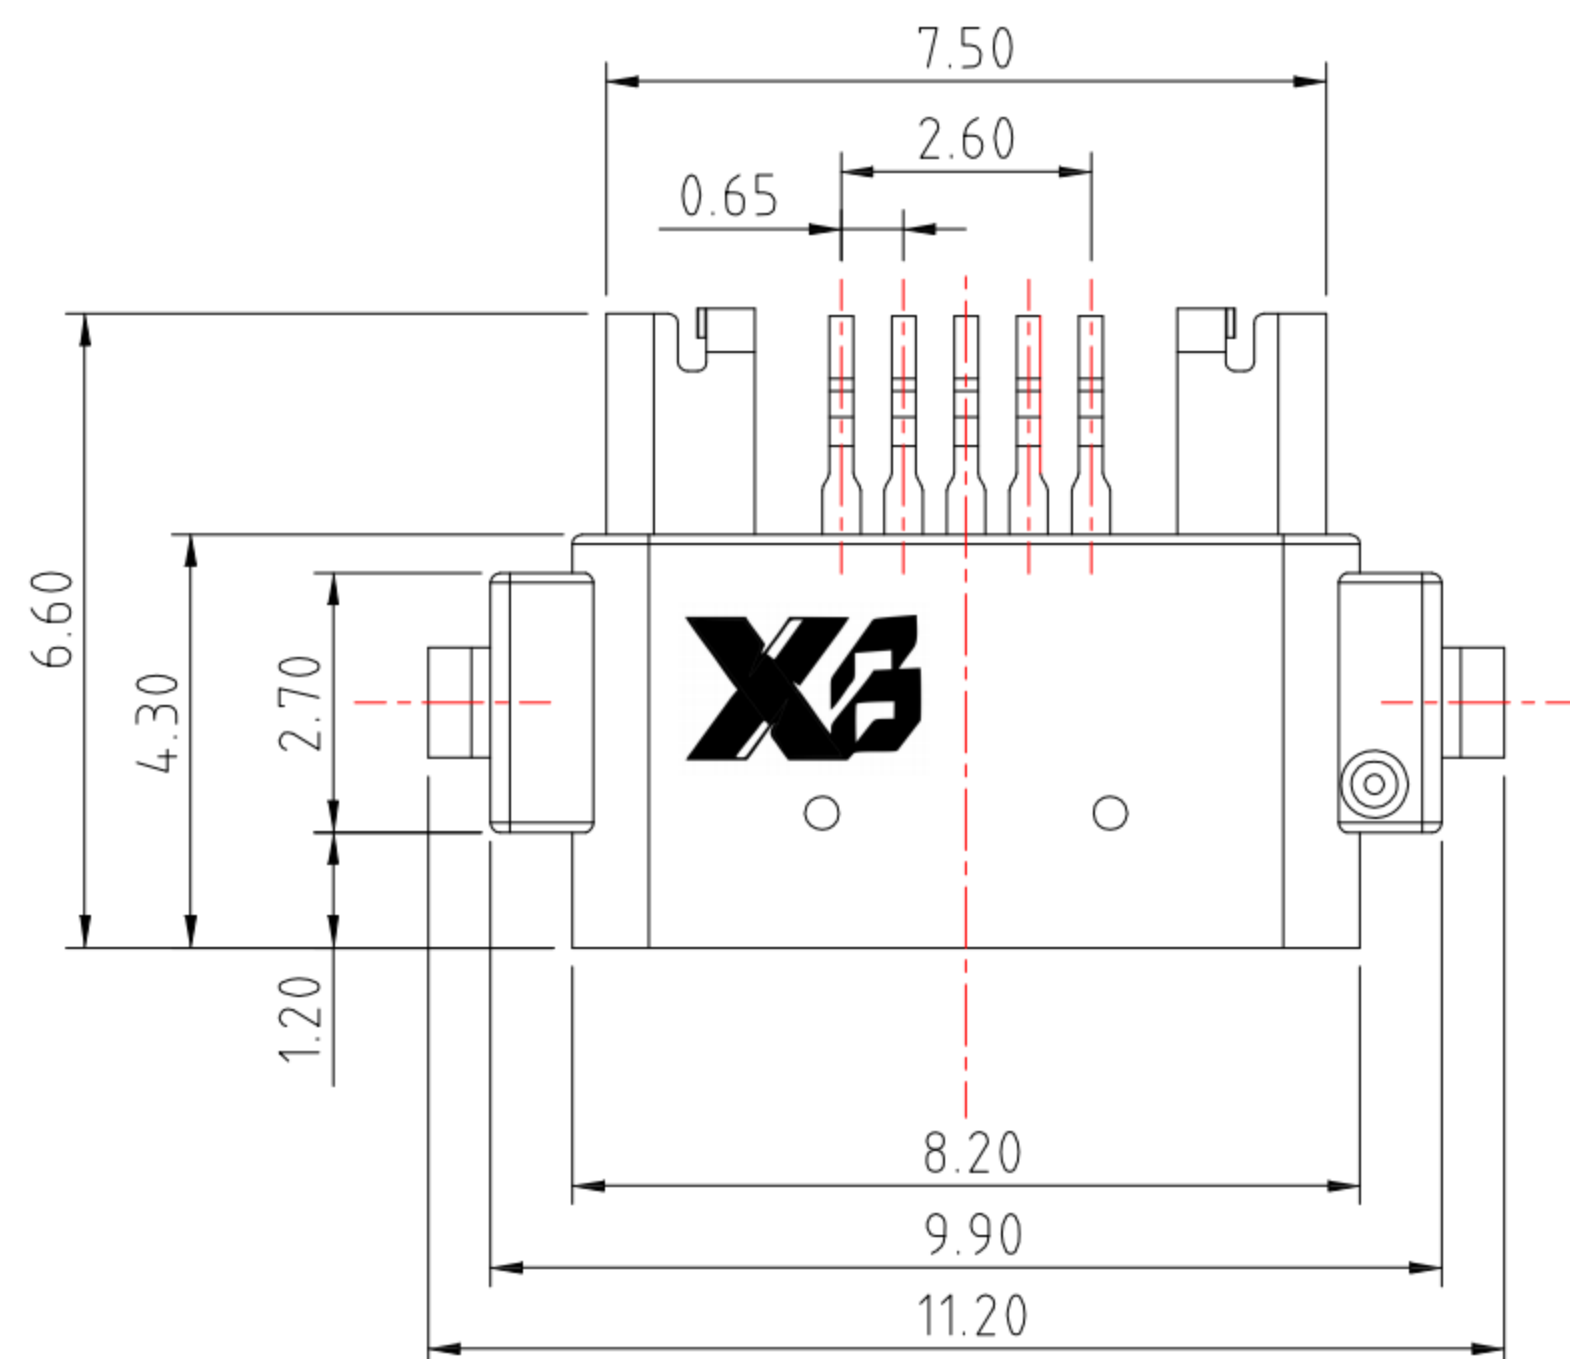


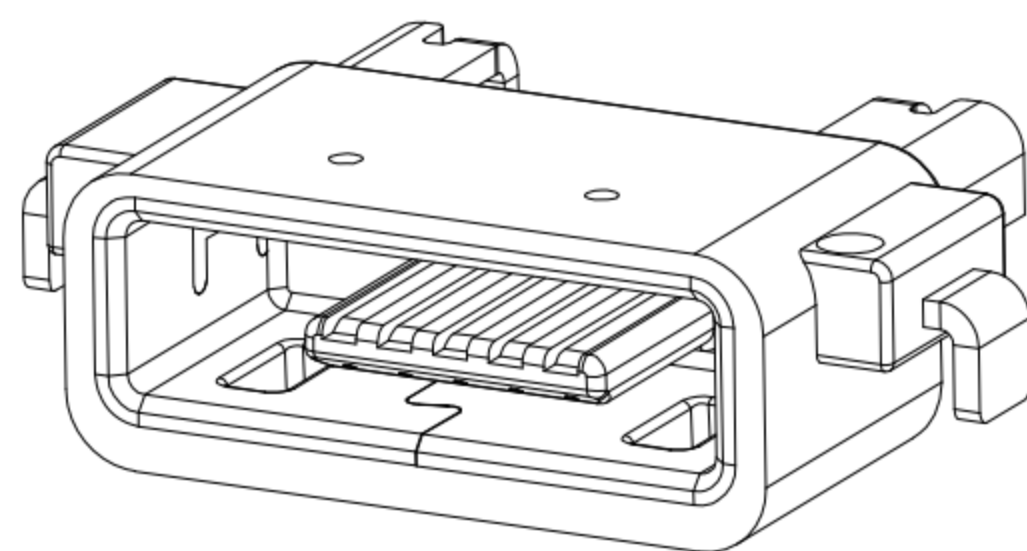

P.C.B LAYOUT MOUNTING PATTERN


- NOTES:
- MATERIAL:
- 1.1 HOUSING: LCP & PA9T,
 - 1.2 CONTACT: PHOSPHOR BRONZE
 - 1.3 SHELL: BRASS
- FINISH:
- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
 - 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER
- 3.SPECIFICATION:
- 3.1 RATING: 30V DC/AC , 1.0A
 - 3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 500 VAC
 - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
 - 3.4 INSULATION RESISTANCE: 500 MΩ MIN.
 - 3.5 TEMPERATURE RANGE: -20°C ~ +60°C
 - 3.6 WATERPROOF LEVER:IP45

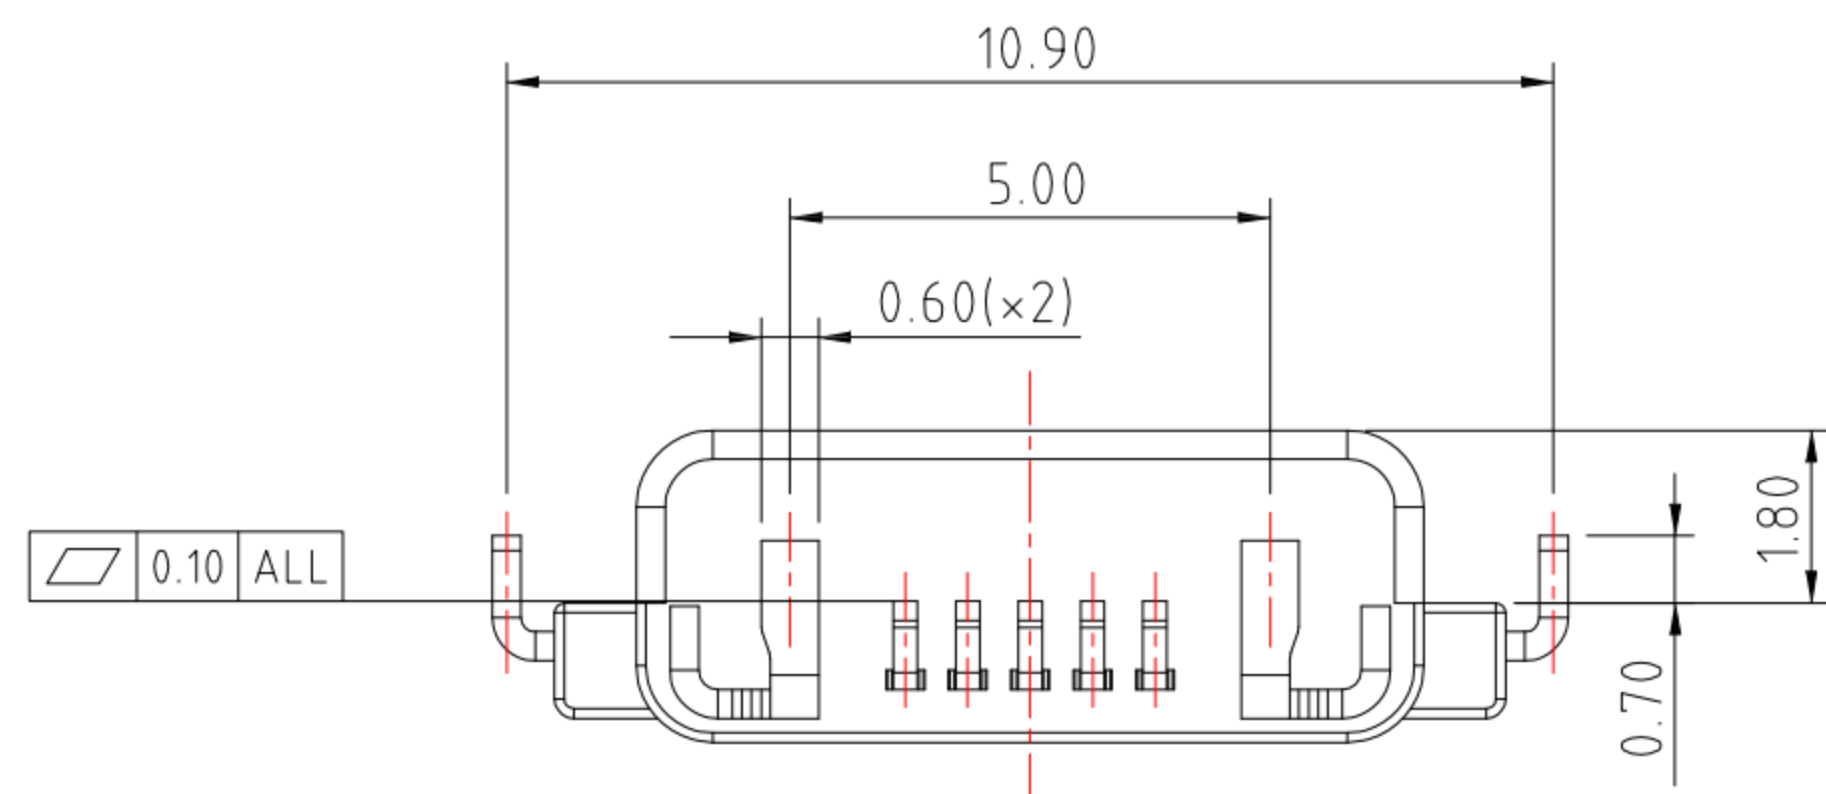

东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD

Switch Connector

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ±0.2	3RD. ANGEL'S		UNITS	MM
		Above 5 ~ 15 ±0.3				
		Above 15 ~ 30 ±0.4				
		Above 30 ~ 50 ±0.5				
		Angle ±0.3°				

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu	09/07/17					
CHECKED BY:	DATE	FINISH		MODLE	MICRO USB 5PIN SMT(AB)TYPE 沉板 平口防水型 板上H:1.45mm	
Jacky Chen	09/07/17	SCALE	1 : 1	DWG NO.	MRUSB-5AB-WP3-S235	SIZE A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	MRUSB-5AB-WP3-S235	VER R1
Tony Kao	09/07/17					