


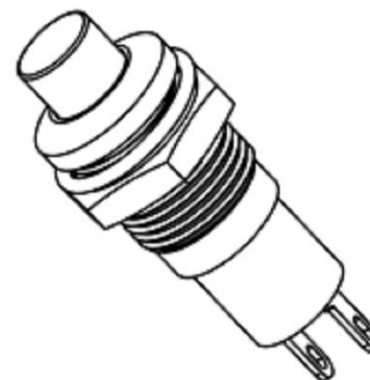


ROHS

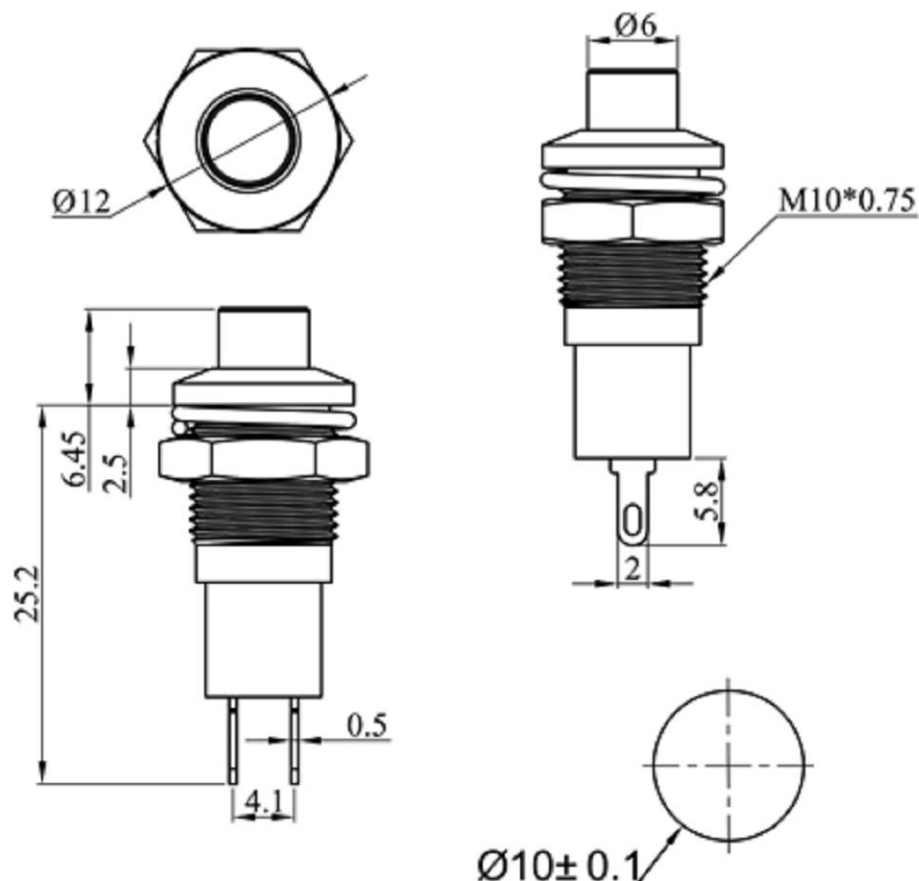

Panel Thickness: 4mm MAX.

Rating: 1A 36VDC
1A 125VAC / 0.5A 250VDC
Contact Resistance: 50mΩ Max.
Insulation Resistance: DC 500V 100MΩ Min.
Dielectric Strength: AC 1000V 1 minute
Total travel: 2.0±0.5mm
Operating Force: 400±100gf
Electrical Life: 10,000 cycles
Mechanical Life: 5,000 cycles
Operating Temperature: -20° C ~ 70° C
Function: OFF - ON

MATERIAL:
Actuator: SUS ;
Top Base: SUS;
Bottom Base: PA66+GF ;
Terminal: Brass, Silver plated ;
Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : METAL PUHS BUTTON SWITCH

MODEL : XB-PBM10-11Z-H-NNN-S0



TOLERANCE
≤1.5mm±0.1
> 1.5mm±0.2
>=10mm±0.3

ANGLE
±2°

NO.	PART NAME	MATERIAL	QTY.	FINISHING
7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE