



产品尺寸图

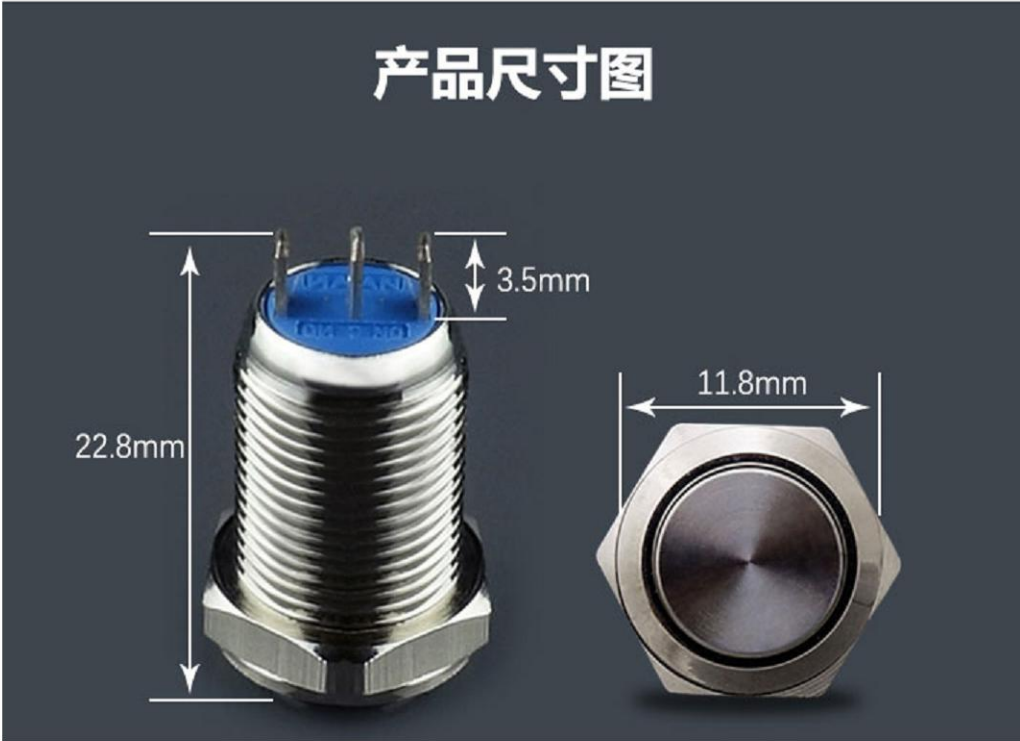


电路图

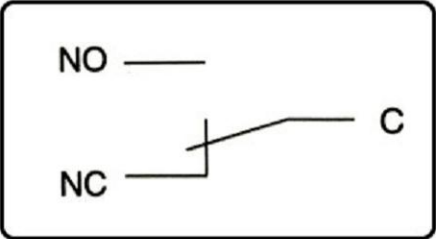

Rating: 1A 36VDC
1A 125VAC / 0.5A 250VDC
Contact Resistance: 50mΩ Max.
Insulation Resistance:DC 500V 100MΩ Min.
Dielectric Strength:AC 1000V 1 minute
Total travel:2.0± 0.5mm
Operating Force:400± 100gf
Electrial Life:10,000 cycles
Mechanical Life:5,000 cycles
Operating Temperation:-20° C~70° C
Function: OFF - ON

电器原理图

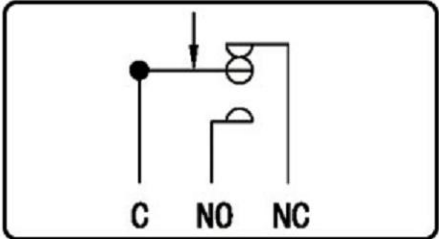

MATERIAL:
Actuator: SUS ;
Top Base: SUS;
Buttom Base:PA66+GF ;
Terminal: Brass,Silver plated ;
Nut: Brass, Ni plated .


The material contained in this drawing is the property of XiBang. Any use other than that specfically authorized by XiBang i5 prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : METAL PUHS BUTTON SWITCH

MODEL : XB-PBM10-13M-F-NNN-SO



TOLERANCE
<=1.5mm±0.1
> 1.5mm±0.2
>=10mm±0.3

ANGLE
±2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE						
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE						
VBRSION	01	APPD.	FEI. LONG. HE	DATE					
7	SPRING	STEEL WIRE	1	NATURE					
6	STEEL BALL	STEEL	1	NATURE					
5	BOARD	PHENOLIC RESIN	1	NATURE					
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED					
3	FRAME	IRON STRIP	1	Ni PLATED					
2	TERMINAL	BRASS STRIP	8	Ag PLATED					
1	KNOB	POM	1	BLACK					
NO.	PART NAME	MATERIAL	QTY.	FINISHING					