


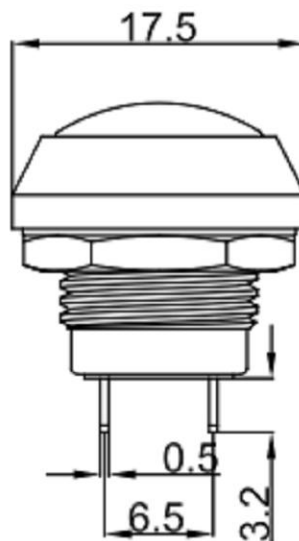


ROHS

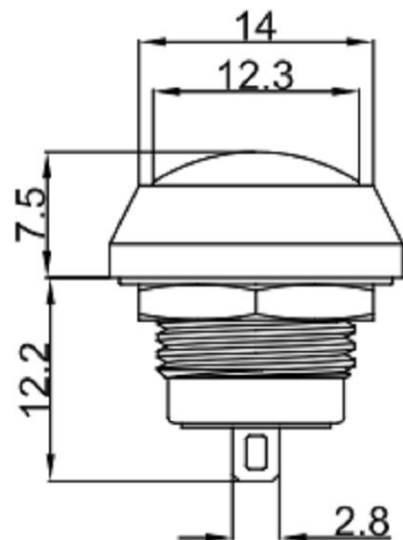


Circuit:SPST
 Current rating:2A
 Voltage rating:36VDC
 Dielectric withstanding voltage : 1000VAC for 1 minute
 Contact resistance:50mQ Max
 Insulation resistance:100MQ Min
 Travel:2.0mm±0.4mm
 Operating Force:400+150gf
 Mechanical life:1,000,000 cycles
 MinElectric life:100,000 cycles Min
 Manual Welding:350° C for 3 seconds
 Function:Momentary
 Operating temperature:-20° C~+70° C
 Level of protection:IP65



CUT-OUT



PANEL MOUNTING




Ø12 LED Specifications

W6	白色	5.0	6.0	9.0	15
U6	蓝色	5.0	6.0	9.0	15
G6	纯绿色	5.0	6.0	9.0	15
Y6	黄色	5.0	6.0	9.0	15
R6	红色	5.0	6.0	9.0	15
W3	白色	2.8	3.0	3.4	15
U3	蓝色	2.8	3.0	3.4	15
G3	纯绿色	2.8	3.0	3.4	15
Y2	黄色	1.8	2.0	2.4	15
R2	红色	1.8	2.0	2.4	15
灯发光颜色 X		最小	一般	最大	额定
Emitted color X		顺向电压(V)			电流(mA)

LED 类型	双向LED灯珠（交直流通用）		
寿 命	40000小时（参考值）		
额定电压	AC/DC12V	AC/DC24V	AC/DC110V
	AC/DC36V	AC/DC48V	AC/DC220V
额定电流	约15mA		约3mA
降压方式	采用3V灯，需内置电阻		

MATERIAL:
 Base: SUS;
 Cap: SUS ;
 Terminal: Copper, Golden plated ;
 Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD										
		TITLE : METAL PUHS BUTTON SWITCH										
		MODEL : XB-PBM12-11M-RB-DR2-A6-S										
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLBRANCE ≤1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°	7	SPRING	STEEL WIRE	1	NATURE
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE				6	STEEL BALL	STEEL	1	NATURE
VERSION 01		APPD.	FEI. LONG. HE	DATE				5	BOARD	PHENOLIC RESIN	1	NATURE
								4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
								3	FRAME	IRON STRIP	1	Ni PLATED
								2	TERMINAL	BRASS STRIP	8	Ag PLATED
								1	KNOB	POM	1	BLACK
								NO.	PART NAME	MATERIAL	QTY.	FINISHING