



ROHS

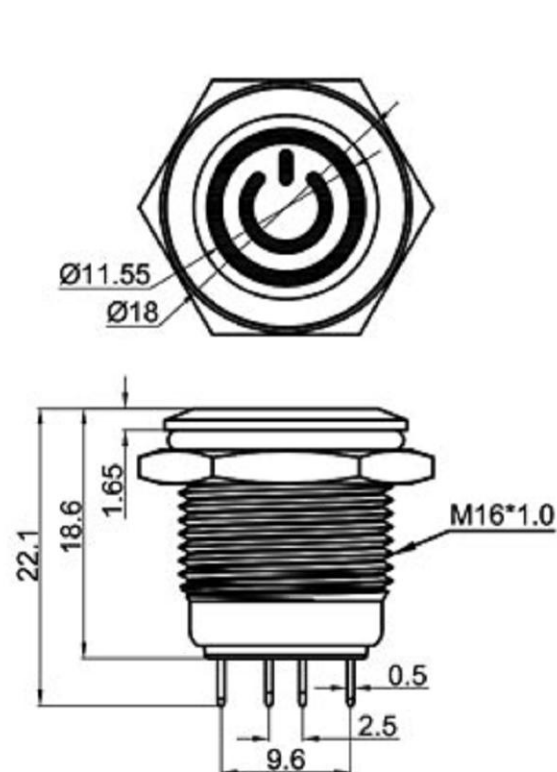


Switch Specifications


Rating: 3A 250VAC ;
2A 36VDC ;
Degree of protection: IP65;
Contact Resistance: 50mΩ Max. ;
Dielectric Strength: 1500VAC For 1 minute ;
Total Travel: 1.5 ± 0.5mm ;
Operating Force: 450 ± 150gf ;
Mechanical Life: 200,000 cycles ;
Load Life: 50,000 cycles ;
Operating Temperature: -20° C ~ 70° C ;
Function: OFF-(ON)



Panel Thickness: 6mm MAX.



LED端子(镀银)
导电端子(镀金)



LED Specifications

RGB	红色	1.8	2.0	2.4	15
	绿色	2.8	3.0	3.6	15
	蓝色	2.8	3.0	3.6	15
灯发光颜色 X Emitted color X		最小	一般	最大	额定 电流 (mA)
		顺向电压(V)			

MATERIAL:

Actuator: SUS ;
Top Base: SUS;
Bottom Base: PA66+GF ;
Terminal: Brass, Silver plated ;
Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.




Switch Connector

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : METAL PUHS BUTTON SWITCH

MODEL : XB-PBM16-11M-FR-RGB-12 三色LED灯



TOLERANCE
<=1.5mm±0.1
> 1.5mm±0.2
>=10mm±0.3

ANGLE
±2°

NO.	PART NAME	MATERIAL	QTY.	FINISHING
7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK

UNIT	MM	DWN.	ZENQ. CHEN	DATE	
SCALE	3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE	