






Switch Specifications
 Rating: 5A 250VAC ;
 2A 36VDC ;
 Degree of protection: IP67;
 Contact Resistance: 50mΩ Max. ;
 Dielectric Strength: 1000VAC For 1 minute ;
 Total Travel: 2.8± 0.5mm ;
 Operating Force: 600± 200gf ;
 Mechanical Life: 200,000 cycles ;
 Load Life: 50,000 cycles ;
 Operating Temperature: -20° C~85° C ;
 Function: OFF-(ON)

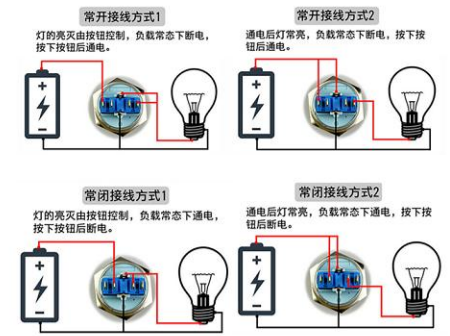

MATERIAL:
 Actuator: SUS ;
 Top Base: SUS;
 Bottom Base: PA66+GF ;
 Terminal: Brass, Silver plated ;
 Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD									
		TITLE : METAL PUSH BUTTON SWITCH MODEL : XB-PBM30-12M-F-NNN-S0									
UNIT : MM	DWN.	ZENQ. CHEN	DATE		TOLERANCE	ANGLE					
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE		<=1.5mm±0.1	±2°					
VERSION	01	APPD.	FEI. LONG. HE	DATE	> 1.5mm±0.2						
					>=10mm±0.3						
							7	SPRING	STEEL WIRE	1	NATURE
							6	STEEL BALL	STEEL	1	NATURE
							5	BOARD	PHENOLIC RESIN	1	NATURE
							4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
							3	FRAME	IRON STRIP	1	Ni PLATED
							2	TERMINAL	BRASS STRIP	8	Ag PLATED
							1	KNOB	POM	1	BLACK
							NO.	PART NAME	MATERIAL	QTY.	FINISHING