

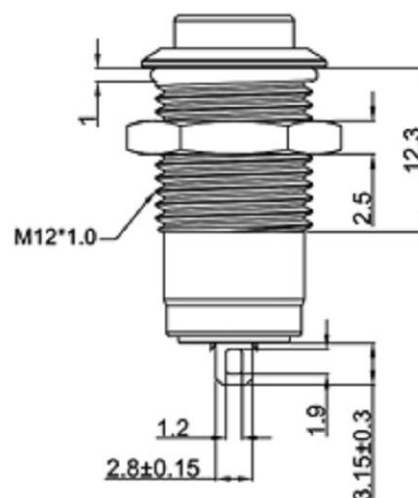
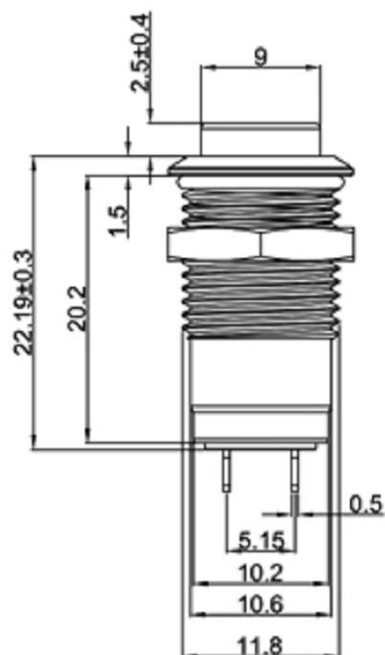

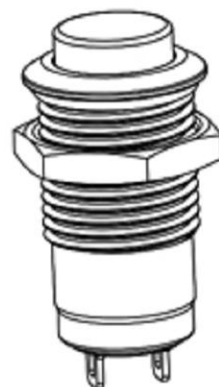



ROHS

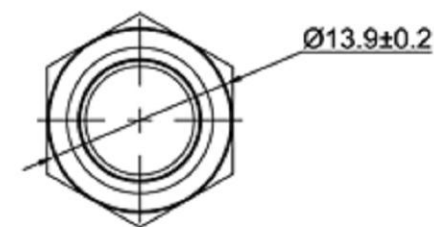

PANEL MOUNTING

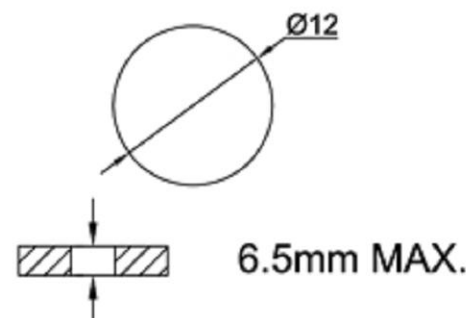

FUNCTION



SPECIFICATIONS

Circuit	:SPST
Current rating	:0.1A / 2A
Voltage rating	:24VDC/125VAC
Dielectric withstanding voltage	:1000VAC for 1 minute
Contact resistance	:50mΩ Max
Insulation resistance	:100MΩ Min
Travel	:2.5mm±0.5mm
Operating Force	:300±100gf
Mechanical Life	:Over 1, 000,000 cycles
Electrical Life	:Over 100,000 cycles
Manual Welding	:350°C for 3 seconds
Function	:OFF-ON
Operating temperature	:-20°C ~ +85°C
Level of protection	:IP65

MATERIAL:

Actuator: SUS ;
Top Base: SUS;
Bottom Base:PA66+GF ;
Terminal: Brass,Silver plated ;
Nut: Brass, Ni plated .


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : METAL PUHS BUTTON SWITCH

MODEL : XB-PS12-Z-H-NNN-S0



TOLERANCE
<=1.5mm±0.1
> 1.5mm±0.2
>=10mm±0.3

ANGLE
±2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING