


ROHS

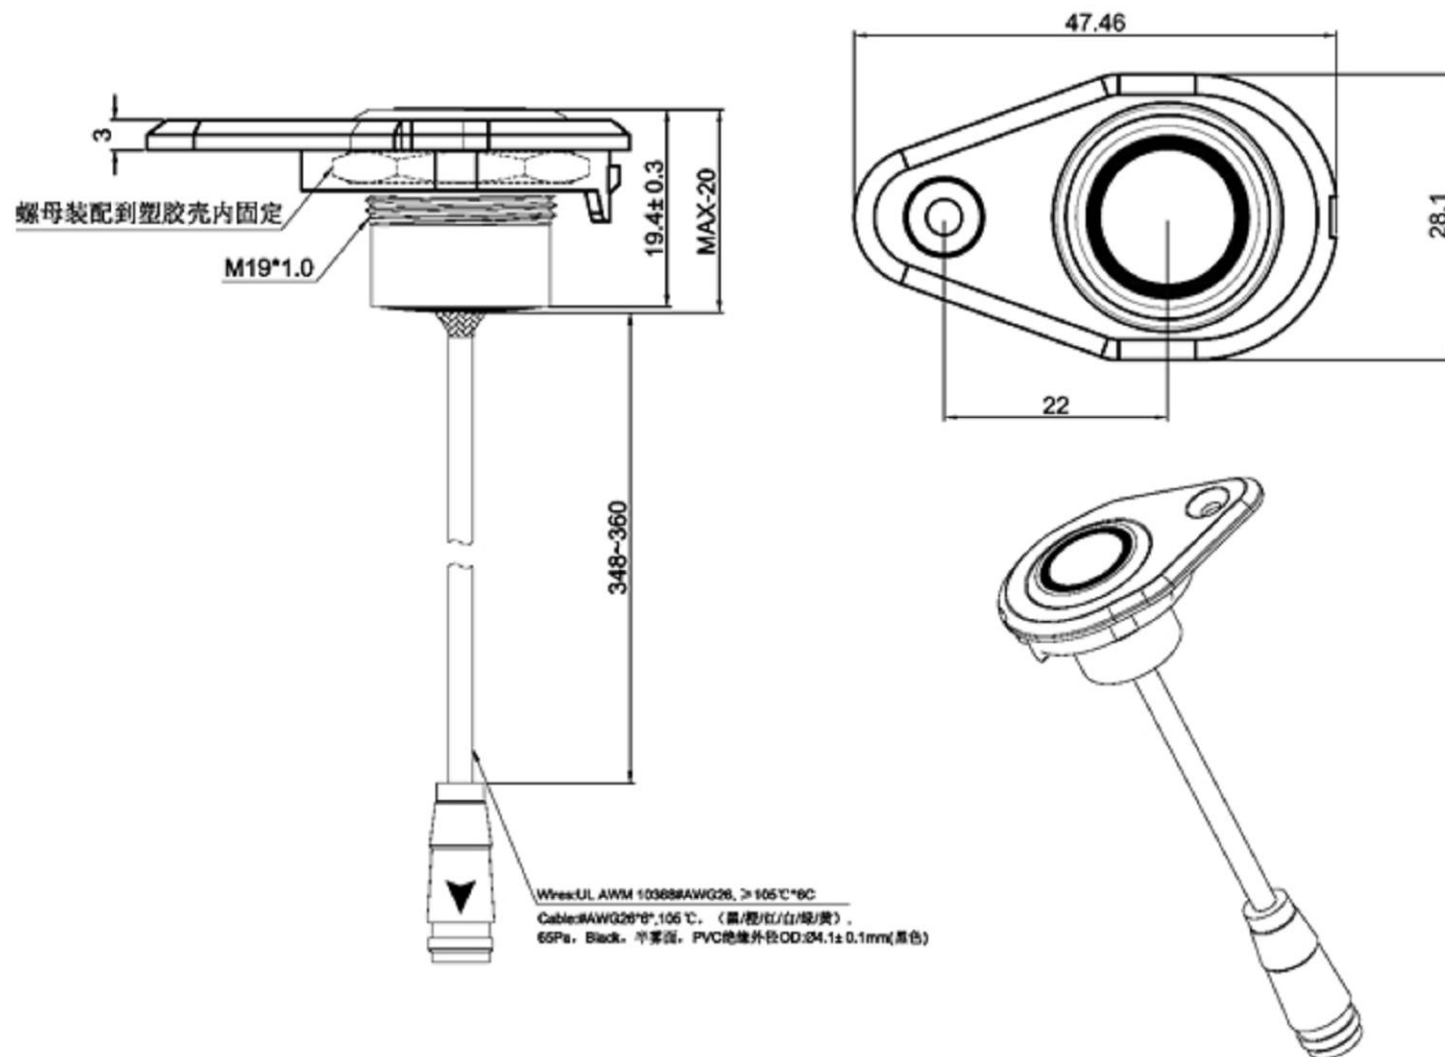


SPECIFICATIONS


Total Travel: 0.8-1.0mm;
Operating Force: 500-700gf;
Degree of protection: IP67;
Mechanical Life: 1000, 000 cycles;
LED Life: 50, 000 hours;

Switch the material:

- 1.Shell material: Aluminium Alloy;
- 2.Key: PC;
- 3.Back shroud: PA66;
- 4.Supporting plate: POM;

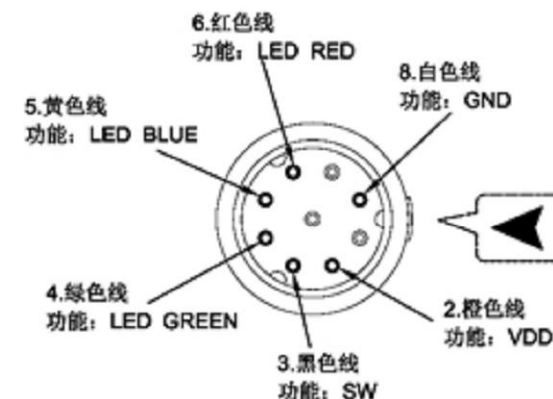

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD							
		TITLE : METAL PUHS BUTTON SWITCH							
		MODEL : XB-PTM19-11M-F-RRGB-A6-H2-3.5							
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°		
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE					
VERSION 01		APPD.	FEI. LONG. HE	DATE					