

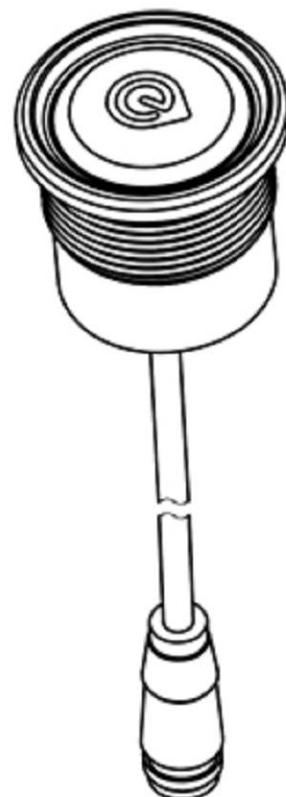


ROHS

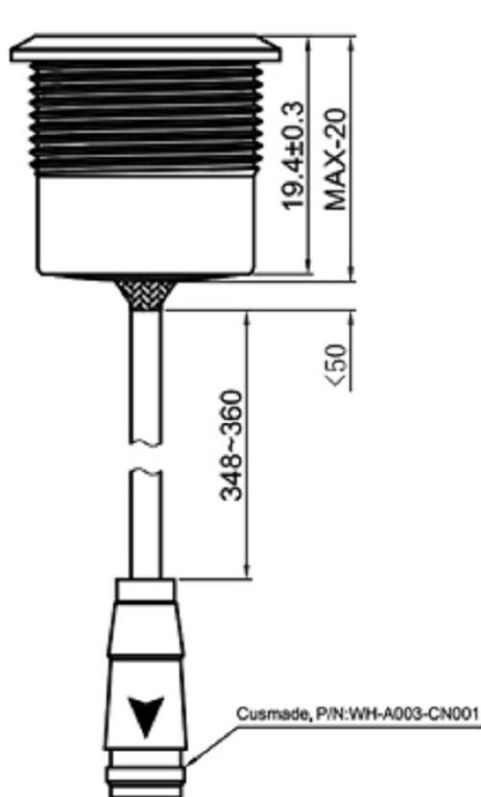

CIRCUIT

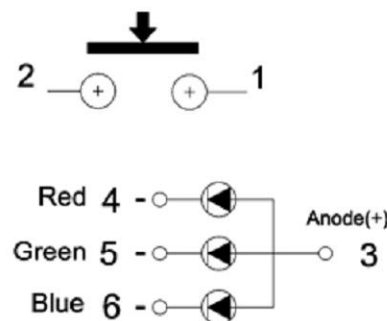

SPECIFICATIONS




Rating: 50mA 12VDC
 Total Travel: 0.8-1.0mm;
 Operating Force: 300-400gf;
 Degree of protction: IP67;
 Mechanical Life: 1000, 000 cycles;
 LED Life: 50, 000 hours;
 LED Rating: 20mA 12VDC

Switch the material:

- 1.Shell material: Aluminium Alloy;
- 2.Key: PC;
- 3.Back shroud: PA66;
- 4.Supporting plate: POM;

PAD LAYOUT

4.绿GREEN
 3.棕BROWN
 2.白WHITE
 5.黑BLACK
 6.紫PURPLE
 1.橙ORANGE

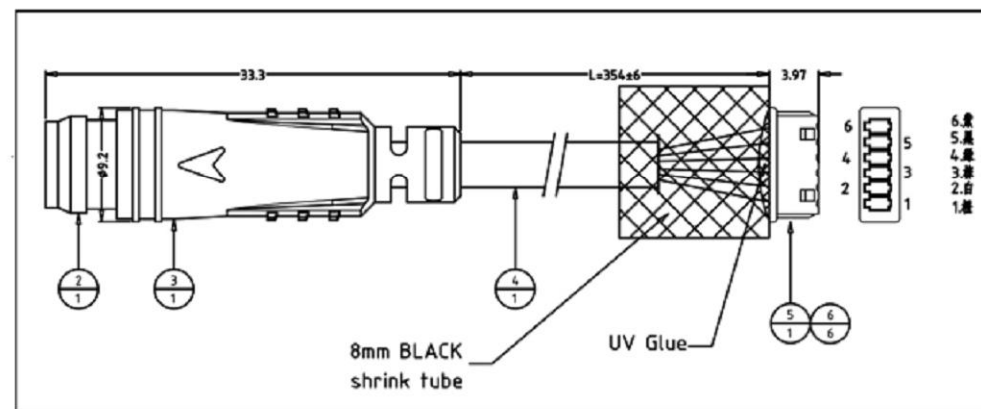


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : METAL PUHS BUTTON SWITCH

MODEL : XB-PTM19-11M-F-RRGB-H3



TOLERANCE
 <=1.5mm±0.1
 > 1.5mm±0.2
 >=10mm±0.3

ANGLE
 ±2°

NO.	PART NAME	MATERIAL	QTY.	FINISHING
7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE