

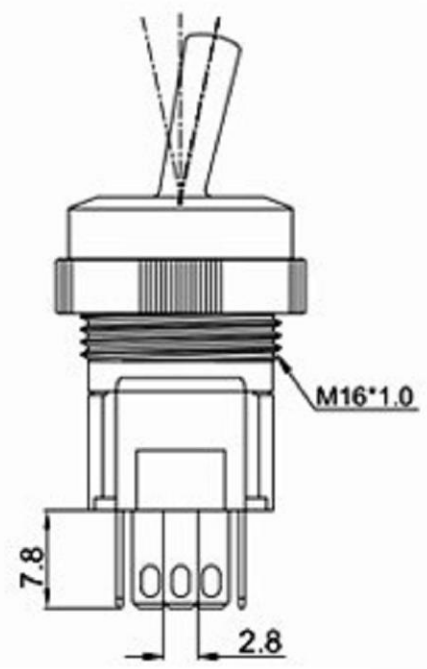


ROHS

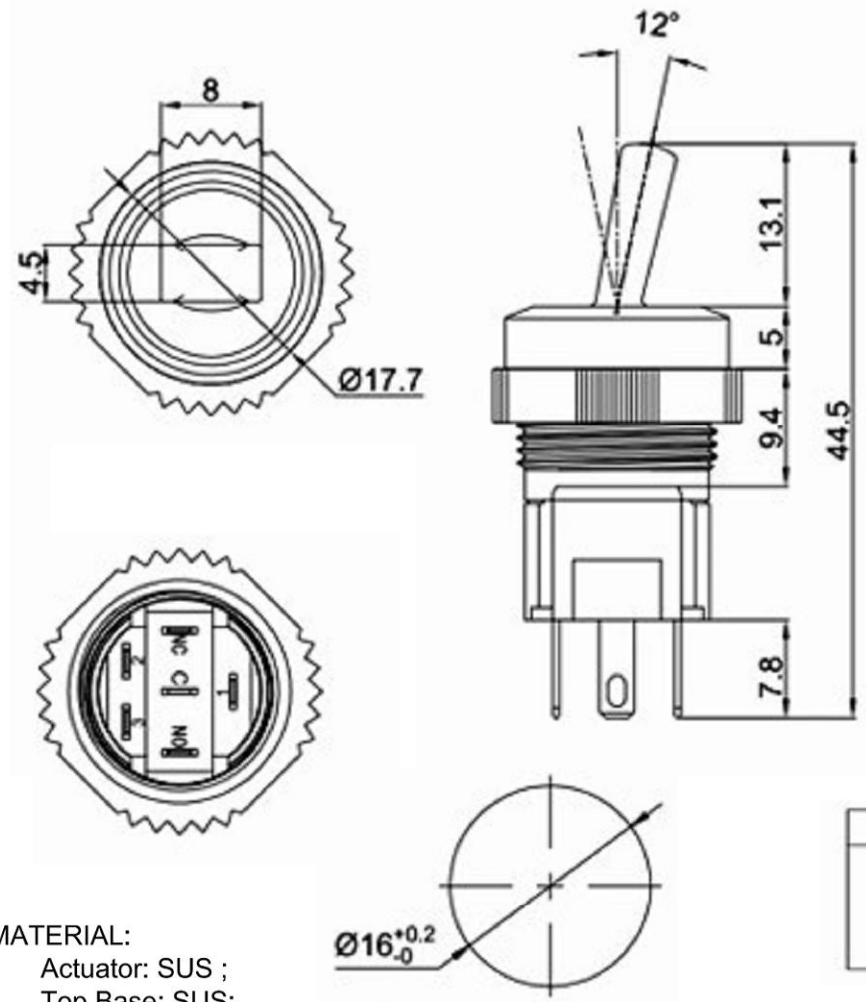

Product specifications:
Rating: 3A 5A 125V 250VAC;
Contact Resistance: 50mΩ Max;
Dielectric Strength: 1000VAC For 1 minute;
Total Travel: 1.2-0.4mm;
Operating Force: 200+50gf;
Load Life: 50000 cycles;
Operating Temperature: -20℃~+85℃
Function: OFF ON



LED Specifications

W6	白色	5.0	6.0	9.0	15
U6	蓝色	5.0	6.0	9.0	15
G6	纯绿色	5.0	6.0	9.0	15
Y6	黄色	5.0	6.0	9.0	15
R6	红色	5.0	6.0	9.0	15
W3	白色	2.8	3.0	3.4	15
U3	蓝色	2.8	3.0	3.4	15
G3	纯绿色	2.8	3.0	3.4	15
Y2	黄色	1.8	2.0	2.4	15
R2	红色	1.8	2.0	2.4	15
灯发光颜色 X	最小	一般	最大	额定	
Emitted color X	顺向电压(V)			电流	(mA)

LED 类型	双向LED灯珠（交直流通用）		
寿命	40000小时（参考值）		
额定电压	AC/DC12V	AC/DC24V	AC/DC110V
	AC/DC36V	AC/DC48V	AC/DC220V
额定电流	约15mA		约3mA
降压方式	采用3V灯，需内置电阻		

MATERIAL:
Actuator: SUS ;
Top Base: SUS;
Buttom Base:PA66+GF ;
Terminal: Brass,Silver plated ;
Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specfically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD											
TITLE : METAL PUHS BUTTON SWITCH		MODEL : XB-TM16-13-RU3-S0		TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3		ANGLE ±2°		7	SPRING	STEEL WIRE	1	NATURE	
6	STEEL BALL							STEEL	1	NATURE			
5	BOARD							PHENOLIC RESIN	1	NATURE			
						4	CONTACT CLIP	PBS STRIP	2	Ag PLATED			
UNIT : MM		DWN.	ZENQ. CHEN	DATE		3	FRAME	IRON STRIP	1	Ni PLATED			
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE		2	TERMINAL	BRASS STRIP	8	Ag PLATED			
VBRSION		01	APPD.	FEI. LONG. HE	DATE		1	KNOB	POM	1	BLACK		
							NO.	PART NAME	MATERIAL	QTY	FINISHING		