



[illegible]

VIEW A

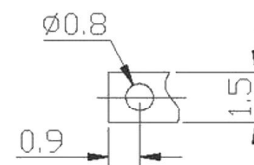

1. Blade switch
2. Base: POM/PA66
3. Terminal: Phosphorus copper
4. Contact point: Purple copper
5. Electroplating: Silver/Gold Plating
6. Temperature range for use: $-10\text{ }^{\circ}\text{C} \pm 60\text{ }^{\circ}\text{C}$
7. Current and voltage: 0.5A 12V DC
8. Operating force: $30\text{GF} \pm 10\text{GF}$
9. Voltage withstand: 500V 0.5mA/min
10. Insulation resistance: $100\text{M } \Omega$
11. Contact resistance: $30\text{M } \Omega$
12. Lifetime: 50000 times

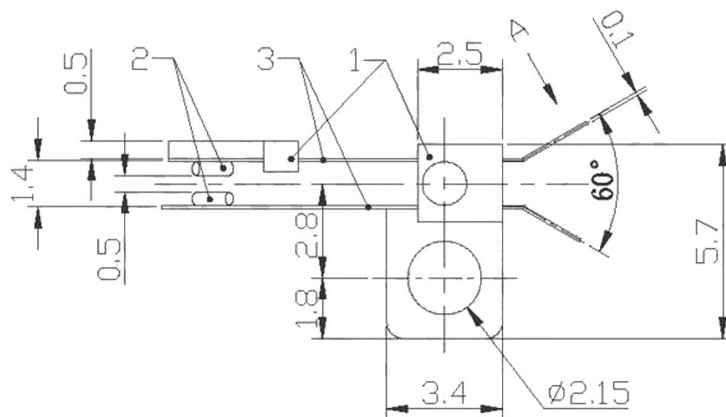

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE :	LEAF SWITCH
MODEL :	LF-022 (W027)



UNIT :	MM	DWN.		DATE		TOLERANCE ≤ 1.5mm ±0.1 ≥ 1.5mm ±0.2	ANGLE TOL ±2°
SCALE :	4 : 1	CHK'D		DATE			
VERSION	01	APPD.		DATE			

3	SPRING TERMINAL	PBS STRIP	2	Ag PLATED
2	CONTACT	PBS	2	Ag PLATED
1	CASE	POM	2	BLACK
NO.	PART NAME	MATERIAL	QTY	FINISHING