



ROHS







improvement without prior notice.

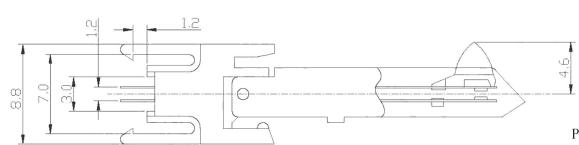



The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang i5 prohibited. The above drawing IS subjected to change for

Product material

- 1. Blade switch
- 2. Base: POM/PA66
- 3. Terminal: Phosphorus copper
- 4. Contact point: Purple copper
- 5. Electroplating: Silver/Gold Plating
- 6: Temperature range for use: $-10~\text{C}\pm~60~\text{C}$
- 7: Current and voltage: 0.5A 12V DC
- 8: Operating force: $30\text{GF} \pm 10\text{GF}$
- 9: Voltage withstand: 500V 0.5mA/min
- 10: Insulation resistance: 100M Ω
- 11: Contact resistance: 30M Ω
- 12: Lifetime: 50000 times

XA	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD								
	TITLE :	LEAF SWITCH		(1)	\vdash			-	
Switch Connector	MODEL :	MODEL : LF-044		T	H			1	
UNIT : MM	DWN.	DATE	TOLERANCE	ANGLE TOL	\square				
SCALE : 3 : 1	CHK' D	DATE	<= 1.5mm ±0.1	±2°	Н			+	
VERSION	APPD.	DATE	> 1.5mm ±0.2	_	NO.	PART NAME	MATERIAL	QTY.	FINISHING