
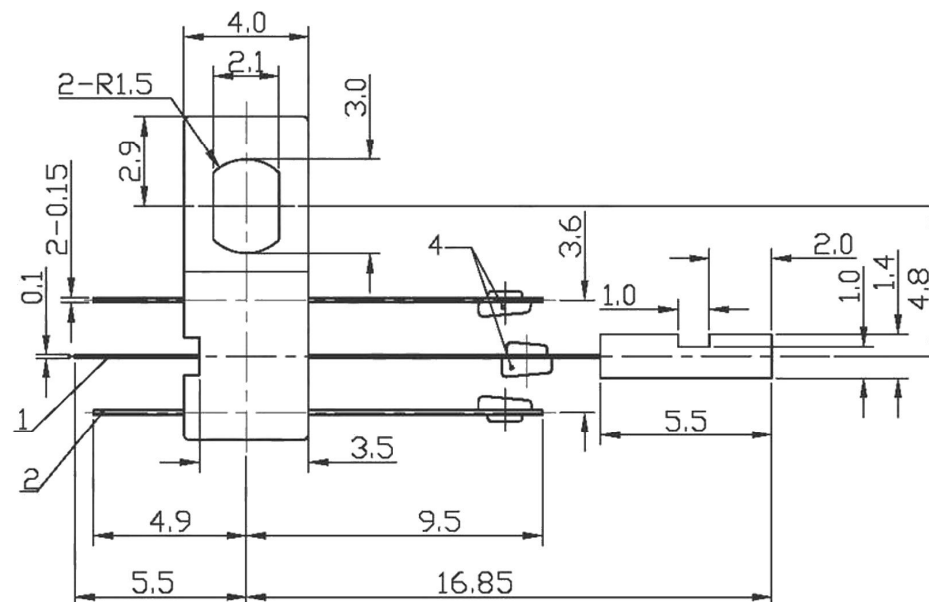
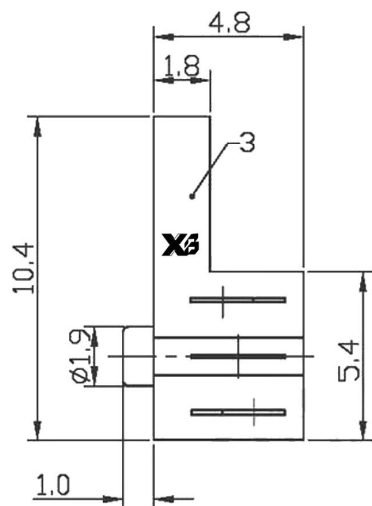
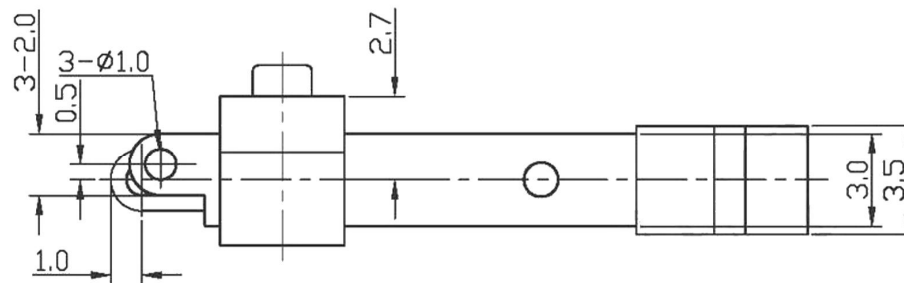


ROHS



Product material

1. Blade switch
2. Base: POM/PA66
3. Terminal: Phosphorus copper
4. Contact point: Purple copper
5. Electroplating: Silver/Gold Plating
6. Temperature range for use: $-10\text{ }^{\circ}\text{C} \pm 60\text{ }^{\circ}\text{C}$
7. Current and voltage: 0.5A 12V DC
8. Operating force: 30GF $\pm$ 10GF
9. Voltage withstand: 500V 0.5mA/min
10. Insulation resistance: 100M Ω
11. Contact resistance: 30M Ω
12. Lifetime: 50000 times


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : LF LEAF SWITCH

MODEL : LF-336



TOLERANCE
 $\leq 1.5\text{mm} \pm 0.1$
 $> 1.5\text{mm} \pm 0.2$
 $> 10.0\text{mm} \pm 0.3$

ANGLE TOL
 $\pm 2^{\circ}$

4	CONTACT POINT	PBS STRIP	3	Ag PLATED
3	CASE	POM	2	BLACK
2	SPRING PLATE B	BeCu	2	Ag PLATED
1	SPRING PLATE A	BeCu	1	Ag PLATED
NO.	PART NAME	MATERIAL	QTY.	FINISHING

UNIT : MM	DWN.	DATE	
SCALE : 3 : 1	CHK'D	DATE	
VERSION 01	APPD.	DATE	