
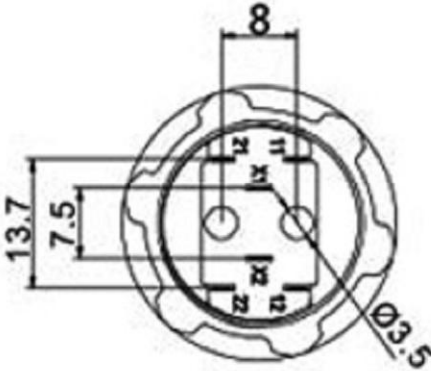
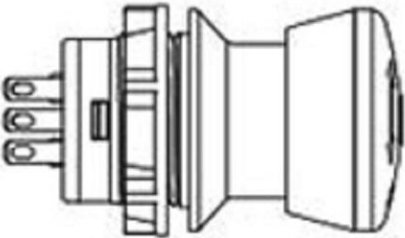



SPECIFICATIONS
Circuit :SPDT/DPDT
Current rating :0.2A/1A/3A
Voltage rating :250VAC
Dielectric withstanding voltage :1000VAC for 1 minute
Contact resistance :50mΩ Max.
Insulation resistance :100MΩ Min.
Travel :2.8mm±0.5mm
Operating Force :700±200gf
Mechanical life :250,000 cycles Min
Electric life :50,000 cycles Min
Solder specifications :260°C for 5 seconds
Function :OFF-ON
Operating temperature : -30°C ~ +70°C

Internal O-Ring to be coated with Low Temp Synthetize Grease.
Sealing: Back-IP65.

MATERIAL:
Base: SUS;
Button: Al alloy ;
Terminal: Brass, Golden plated ;
Nut: Brass, Without Surface Plated .

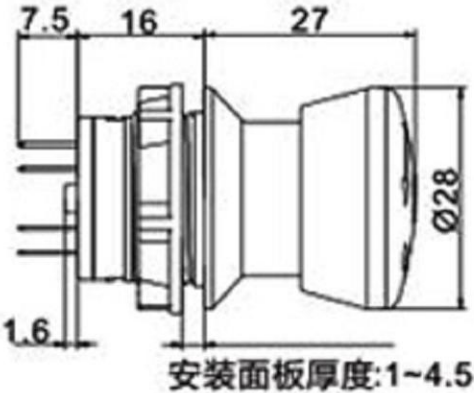

28mm 头部外形

LED Specifications

W6	白色	5.0	6.0	9.0	15
U6	蓝色	5.0	6.0	9.0	15
G6	纯绿色	5.0	6.0	9.0	15
Y6	黄色	5.0	6.0	9.0	15
R6	红色	5.0	6.0	9.0	15
W3	白色	2.8	3.0	3.4	15
U3	蓝色	2.8	3.0	3.4	15
G3	纯绿色	2.8	3.0	3.4	15
Y2	黄色	1.8	2.0	2.4	15
R2	红色	1.8	2.0	2.4	15

LED 类型	双向LED灯珠（交直流通用）		
寿 命	40000小时（参考值）		
额定电压	AC/DC12V	AC/DC24V	AC/DC110V
	AC/DC36V	AC/DC48V	AC/DC220V
额定电流	约15mA		约3mA
降压方式	采用3V灯，需内置电阻		

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD					TOLBRANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3 ANGLE ±2°	
TITLE : METAL PUHS BUTTON SWITCH						
MODEL : XB-ESM-22-13Z-28-L1						
UNIT : MM		DWN.	ZENQ. CHEN	DATE		
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE		
VERSION	01	APPD.	FEI. LONG. HE	DATE		