

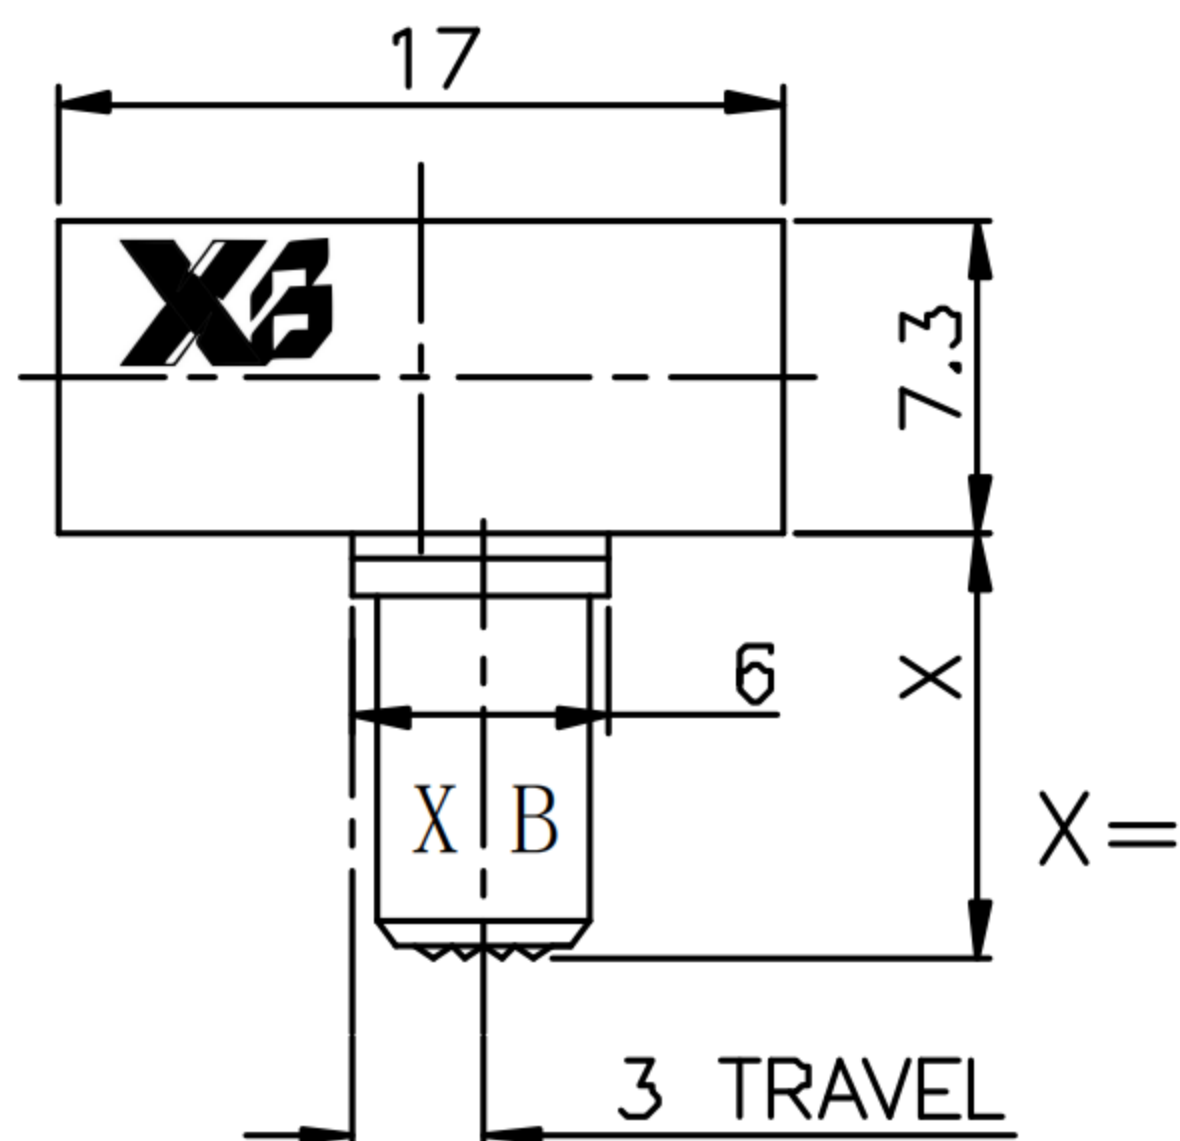



ROHS

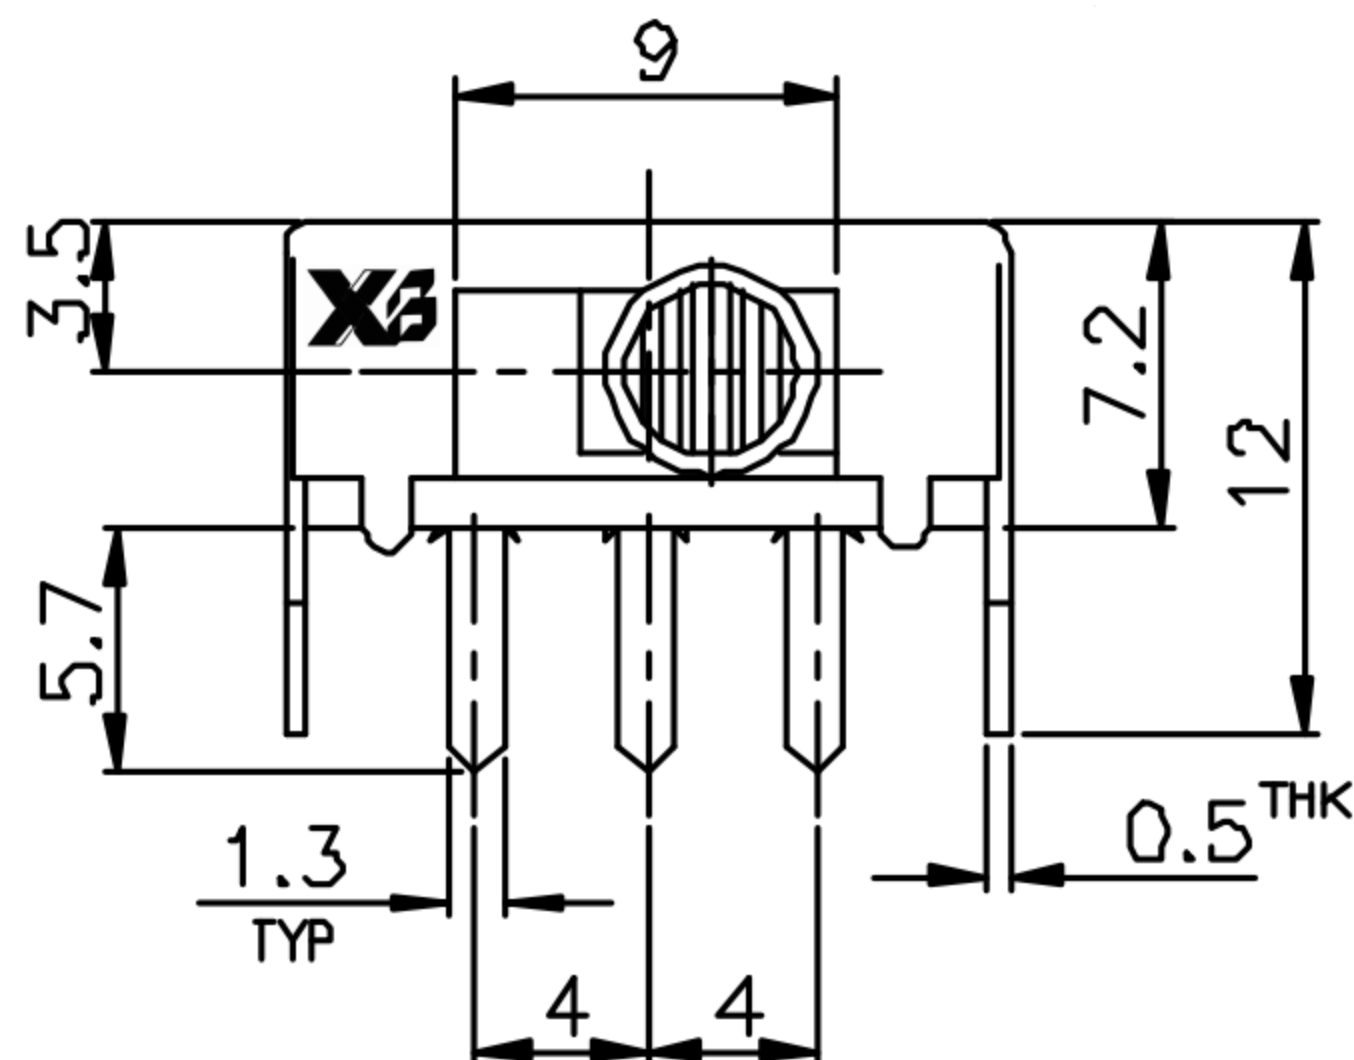

ALUM.KNOB

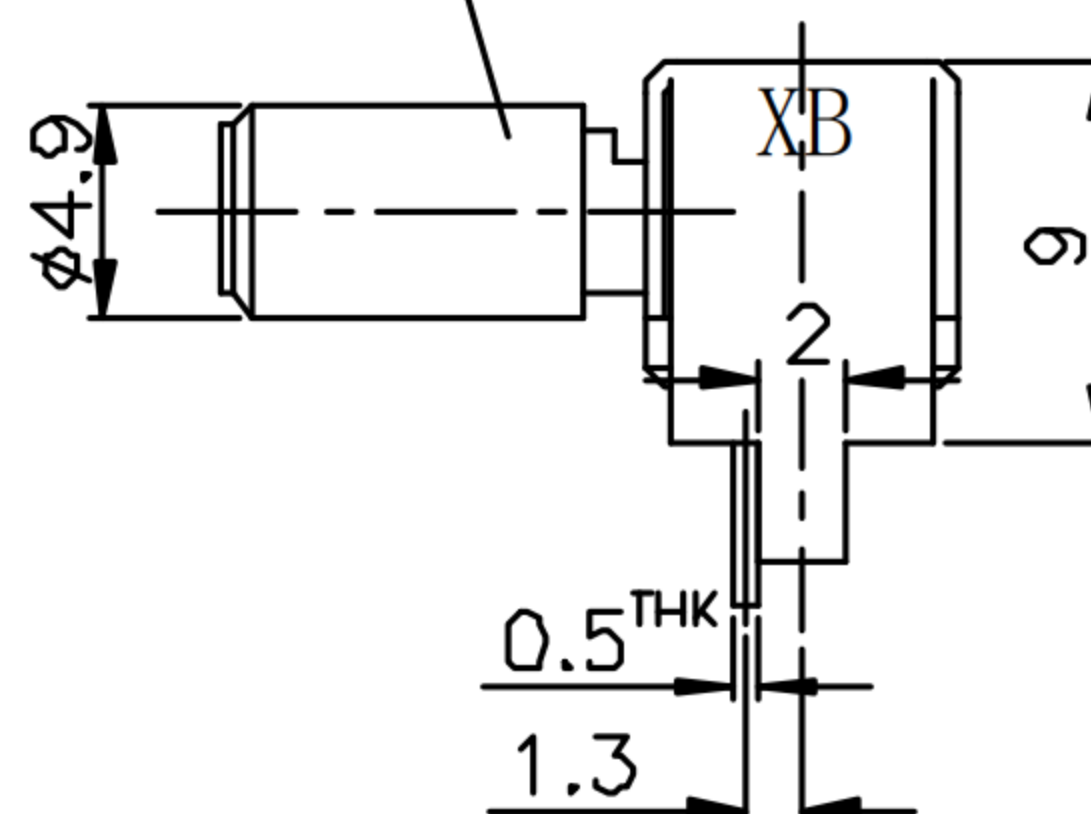

SLIDE SWITCH 1P2T

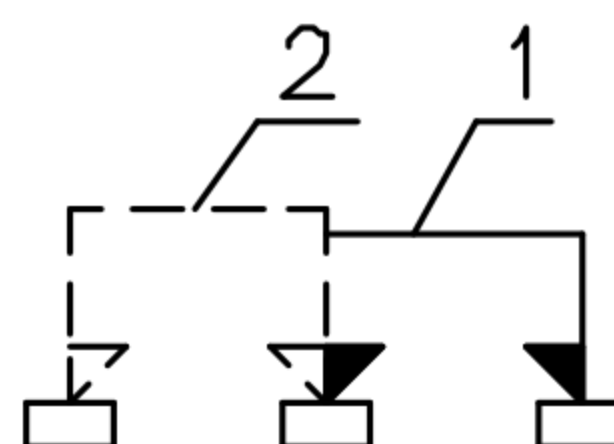

SCHEMATIC

SPECIFICATION (INITIAL)

RATING:	DC 50V 0.5A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ AT 500V DC
WITHSTAND VOLTAGE:	AC 500V FOR 1 MIN
OPERATION FORCE:	300 ± 150 g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.

XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD									
TITLE : HORIZONTAL SLIDE SWITCH					TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3 ANGLE ±2°				
MODEL : XB-SK-12F05-T									
UNIT : MM		DWN.	ZENQ. CHEN	DATE					
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE					
VERSION	01	APPD.	FEI. LONG. HE	DATE					