


ROHS

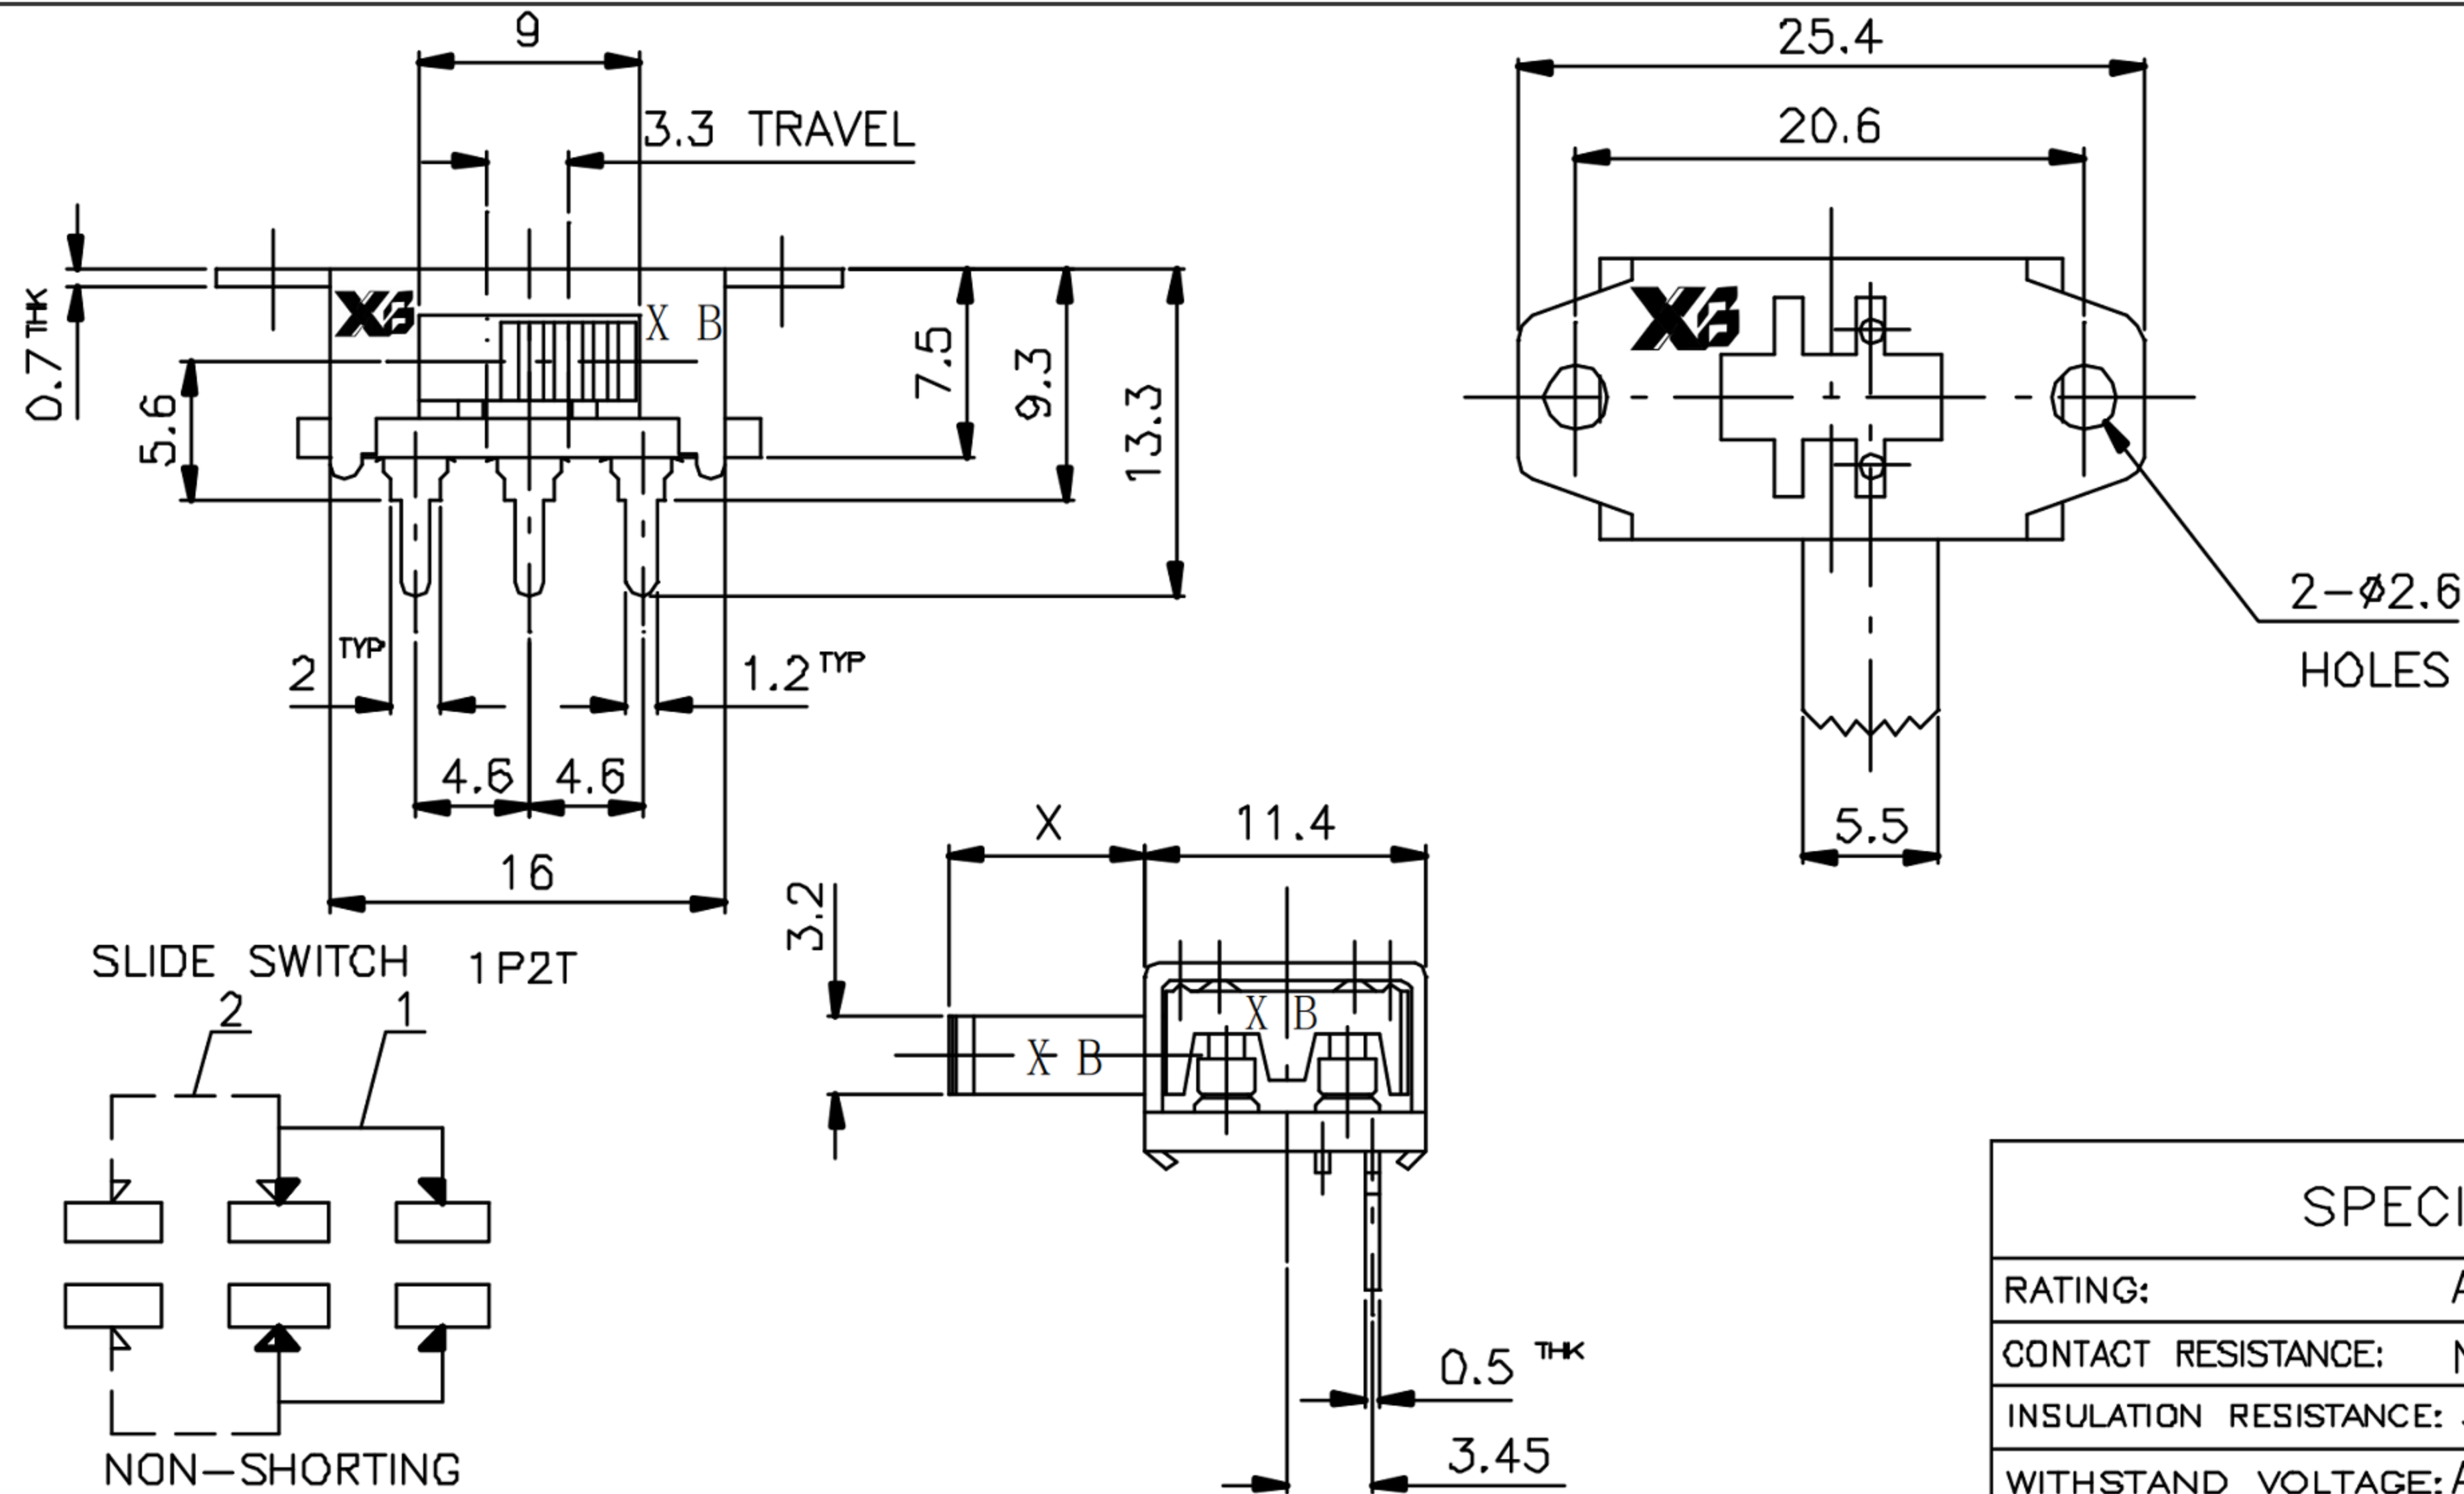

SPECIFICATION (INITIAL)	
RATING:	AC 125V 3A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 500V DC
WITHSTAND VOLTAGE:	AC 1000V for 1 min
OPERATION FORCE:	300±200g
SWITCHING LIFE:	10,000 Cycles(6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD											
		TITLE : HORIZONTAL SLIDE SWITCH											
MODEL : XB-WK-12F15T													
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°	7	SPRING	STEEL WIRE	1	NATURE	
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE				6	STEEL BALL	STEEL	1	NATURE	
VERSION 01		APPD.	FEI. LONG. HE	DATE				5	BOARD	PHENOLIC RESIN	1	NATURE	
								4	CONTACT CLIP	PBS STRIP	2	Ag PLATED	
								3	FRAME	IRON STRIP	1	Ni PLATED	
								2	TERMINAL	BRASS STRIP	8	Ag PLATED	
								1	KNOB	POM	1	BLACK	
								NO.	PART NAME	MATERIAL	QTY.	FINISHING	