

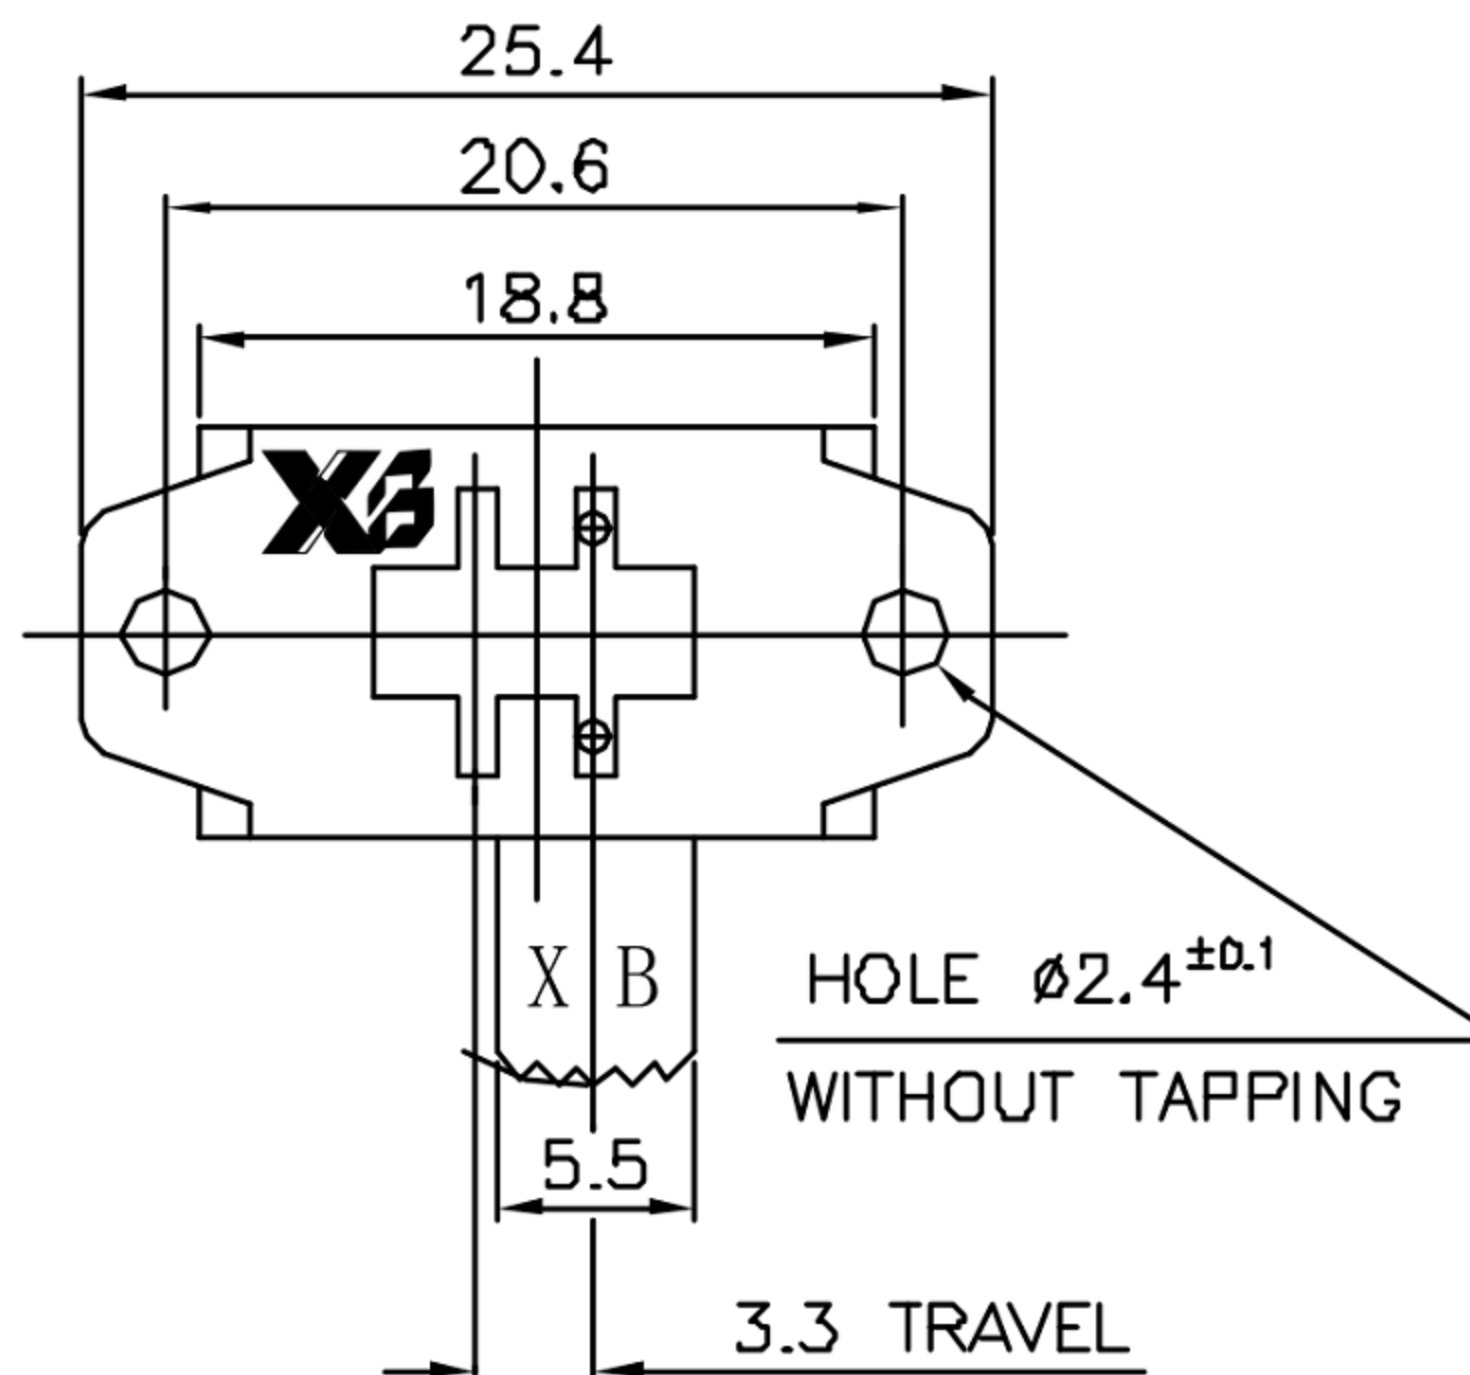
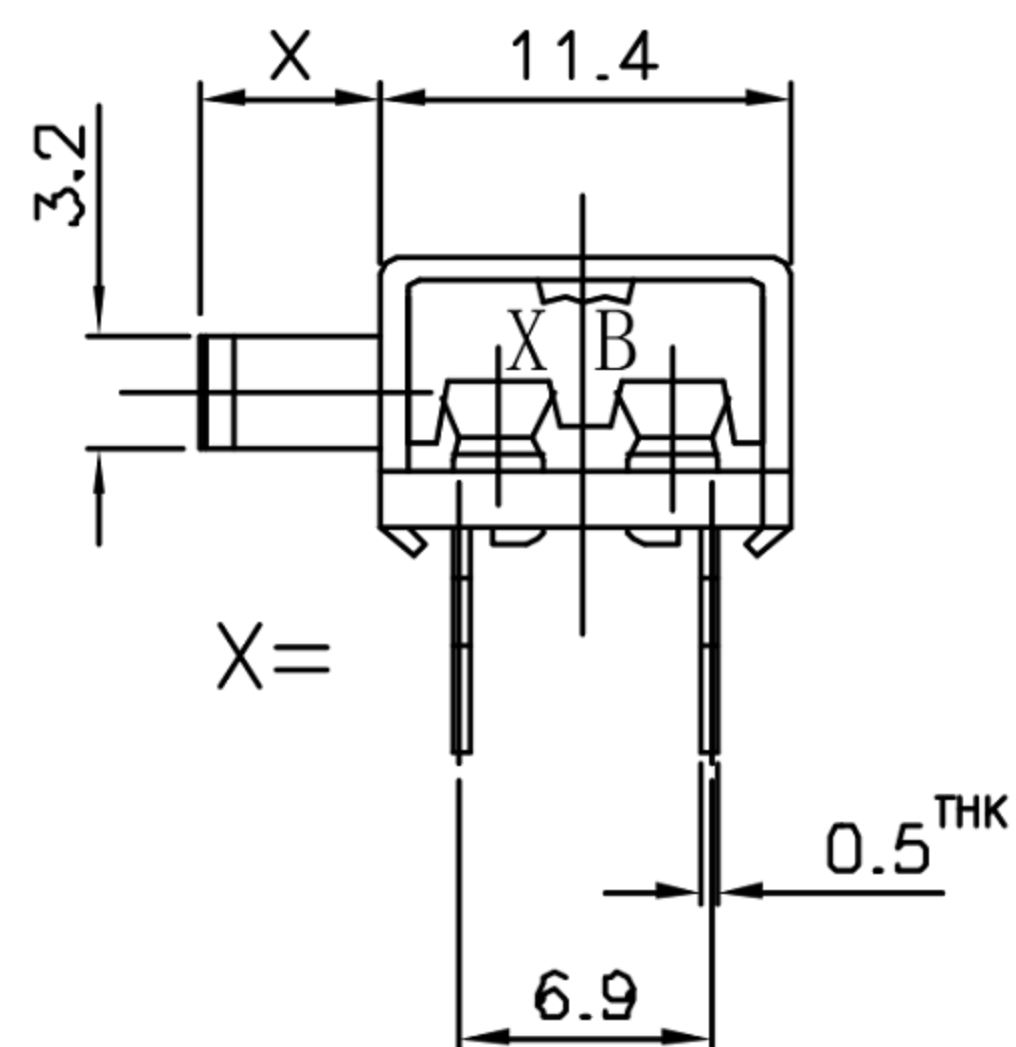


ROHS

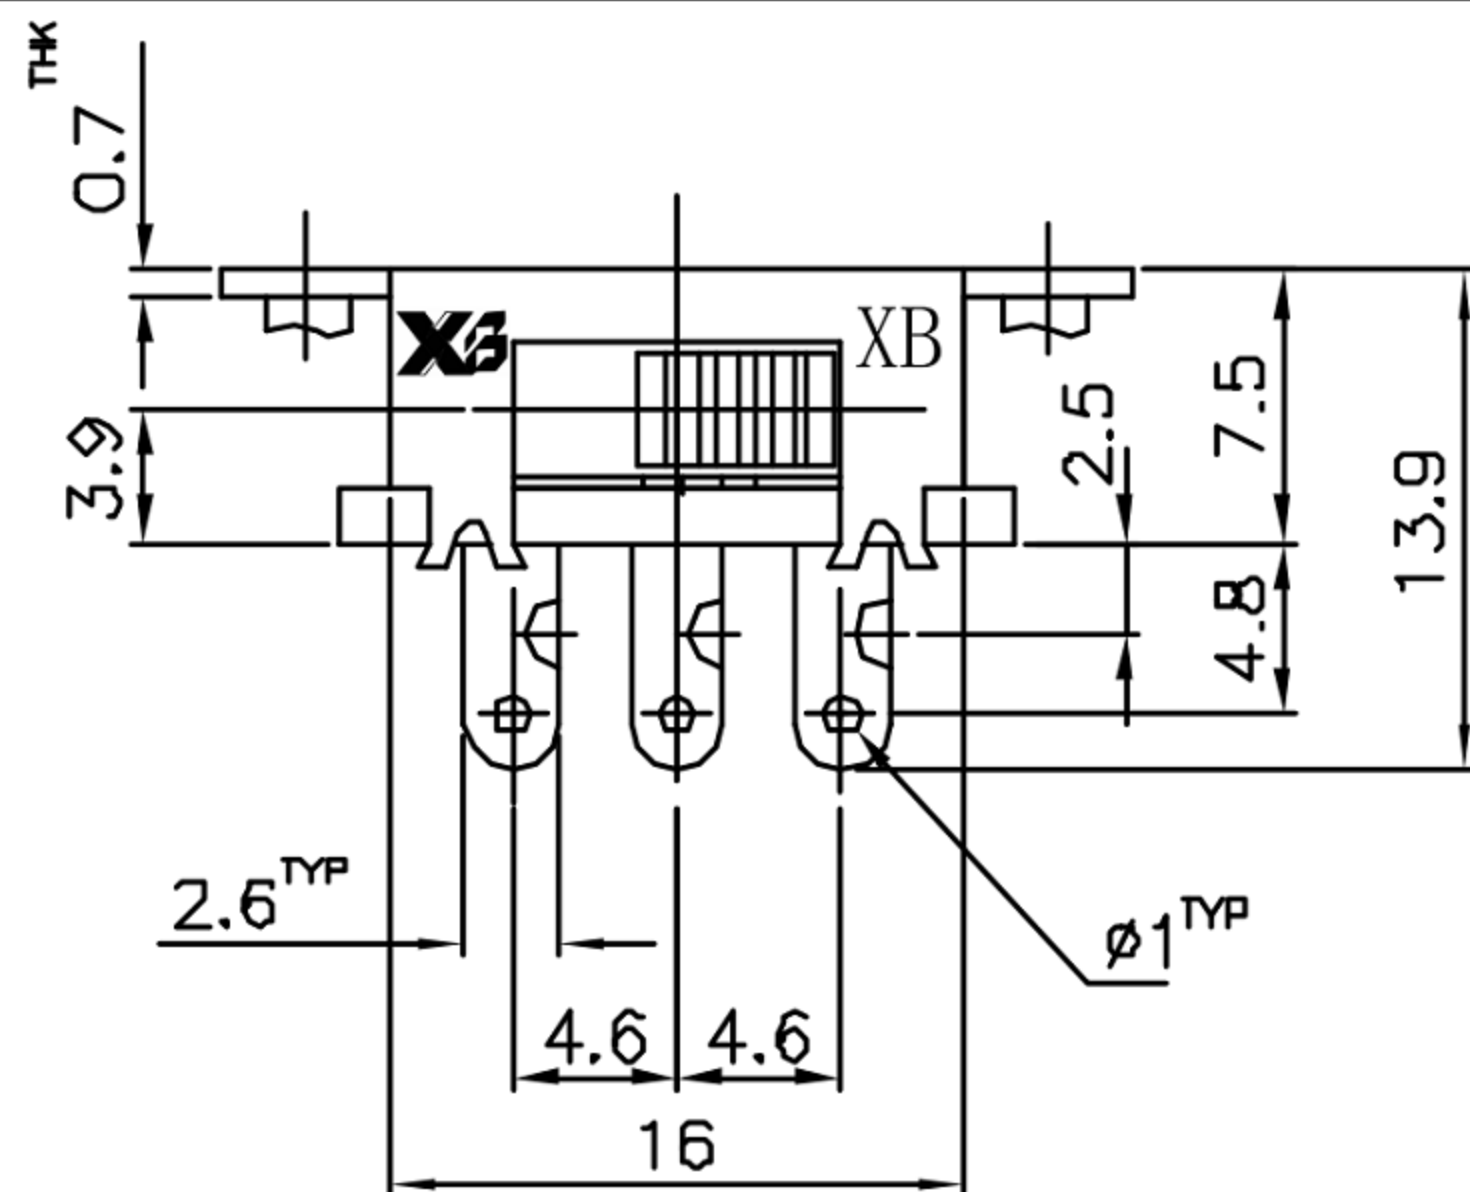

SLIDE SWITCH 2P2T

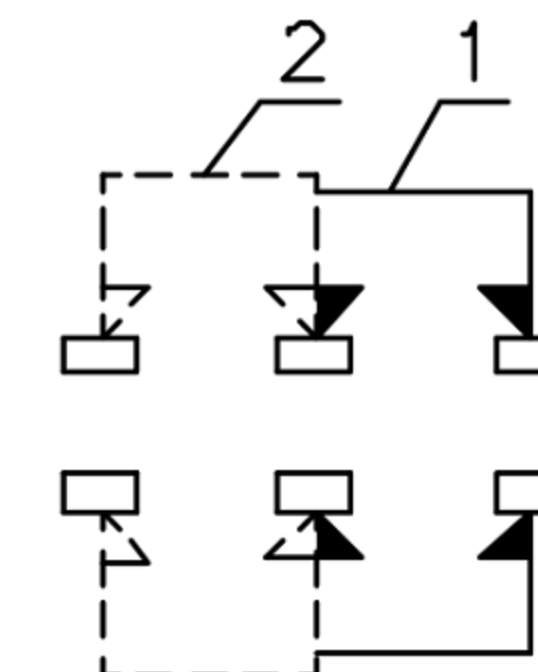

NON-SHORTING
SCHEMATIC

SPECIFICATION (INITIAL)

RATING:	AC 125V 3A
CONTACT RESISTANCE:	Nat more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 500V DC
WITHSTAND VOLTAGE:	AC 1000V FOR 1 MIN
OPERATION FORCE:	300± 200g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : HORIZONTAL SLIDE SWITCH

MODEL : XB-WK-22F18T

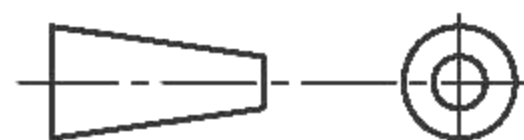

TOLERANCE
≤1.5mm±0.1
> 1.5mm±0.2
>=10mm±0.3

ANGLE
±2°

NO.	PART NAME	MATERIAL	QTY	FINISHING
7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE