
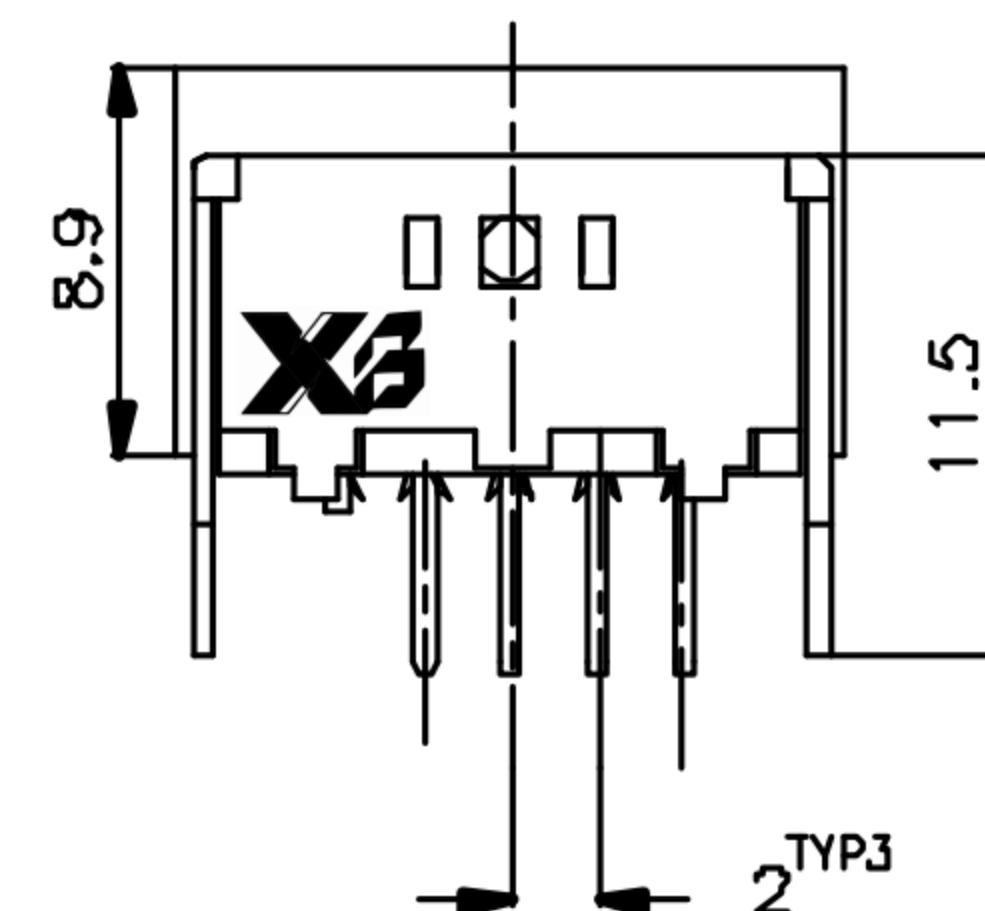
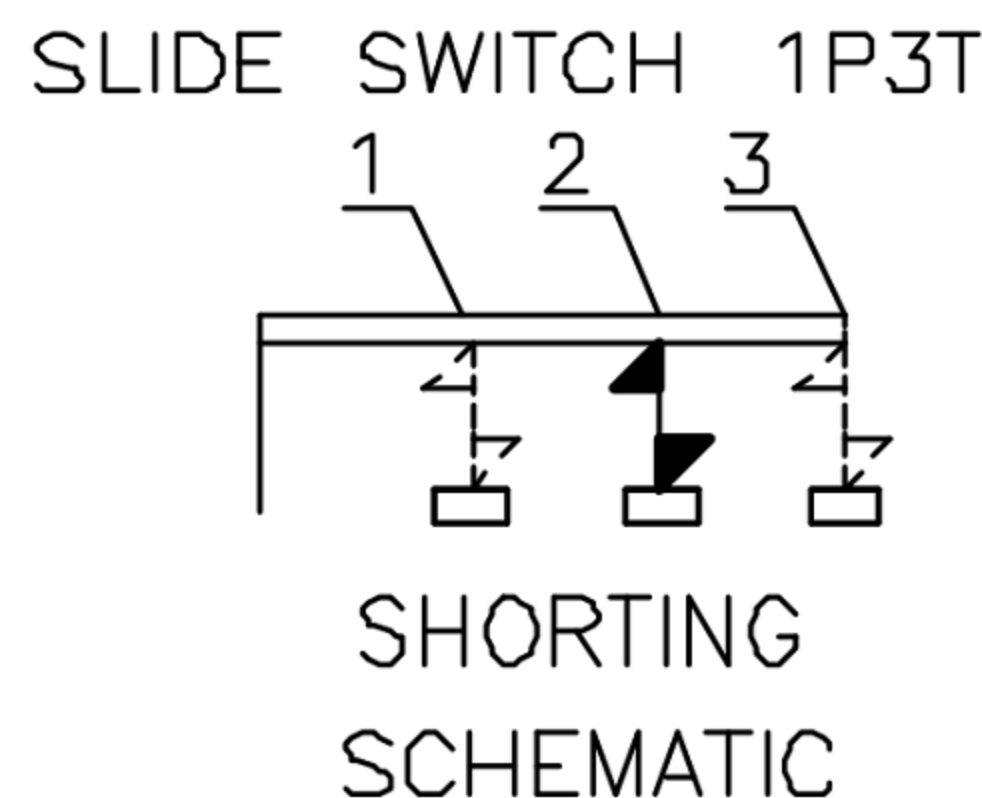
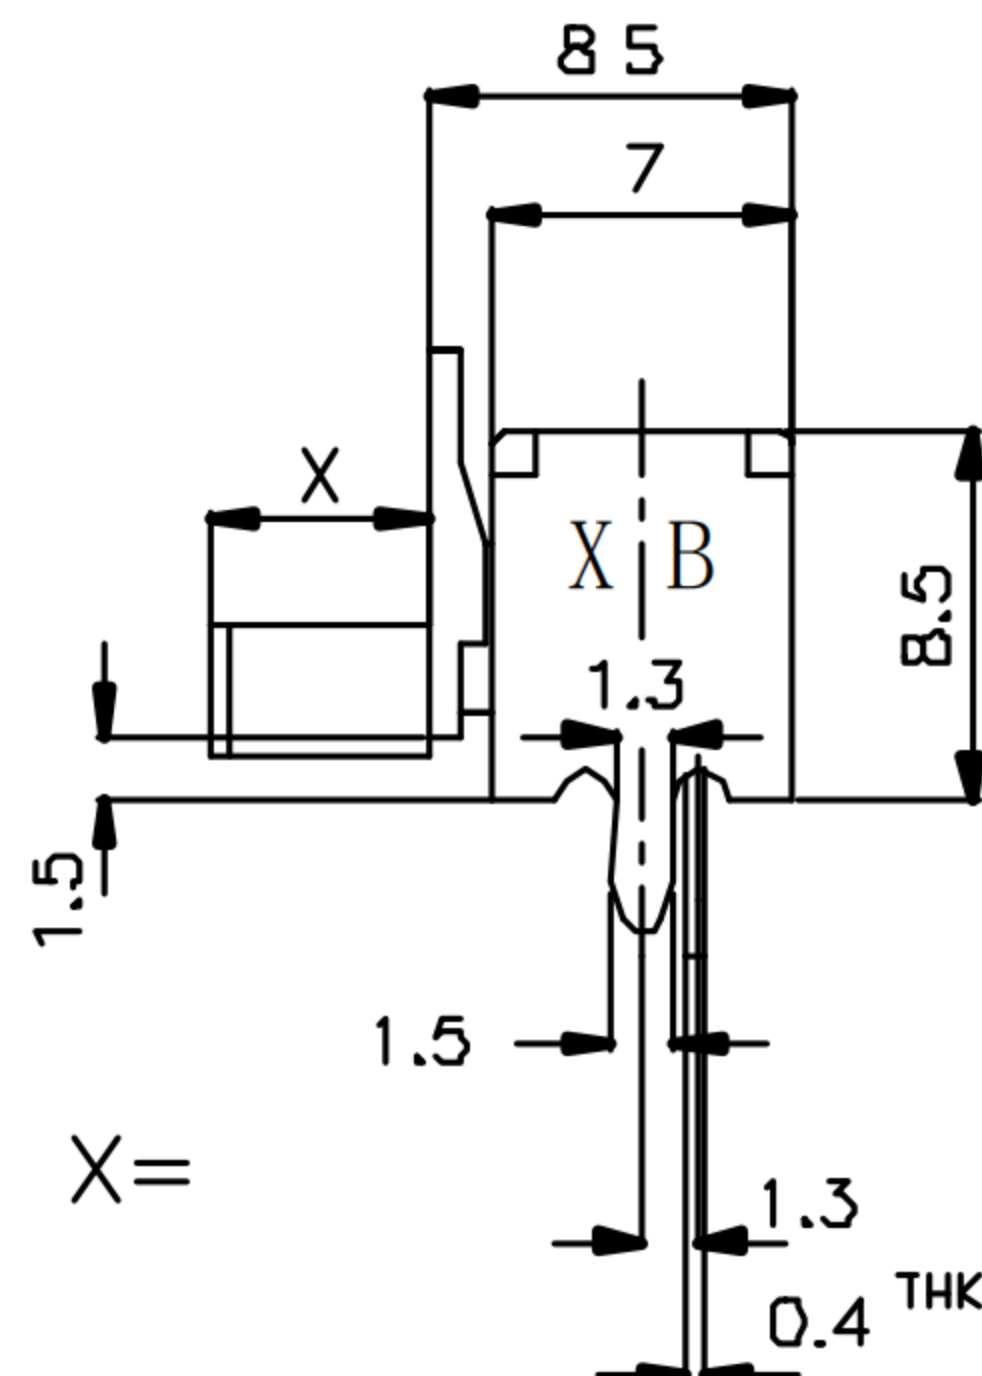



ROHS

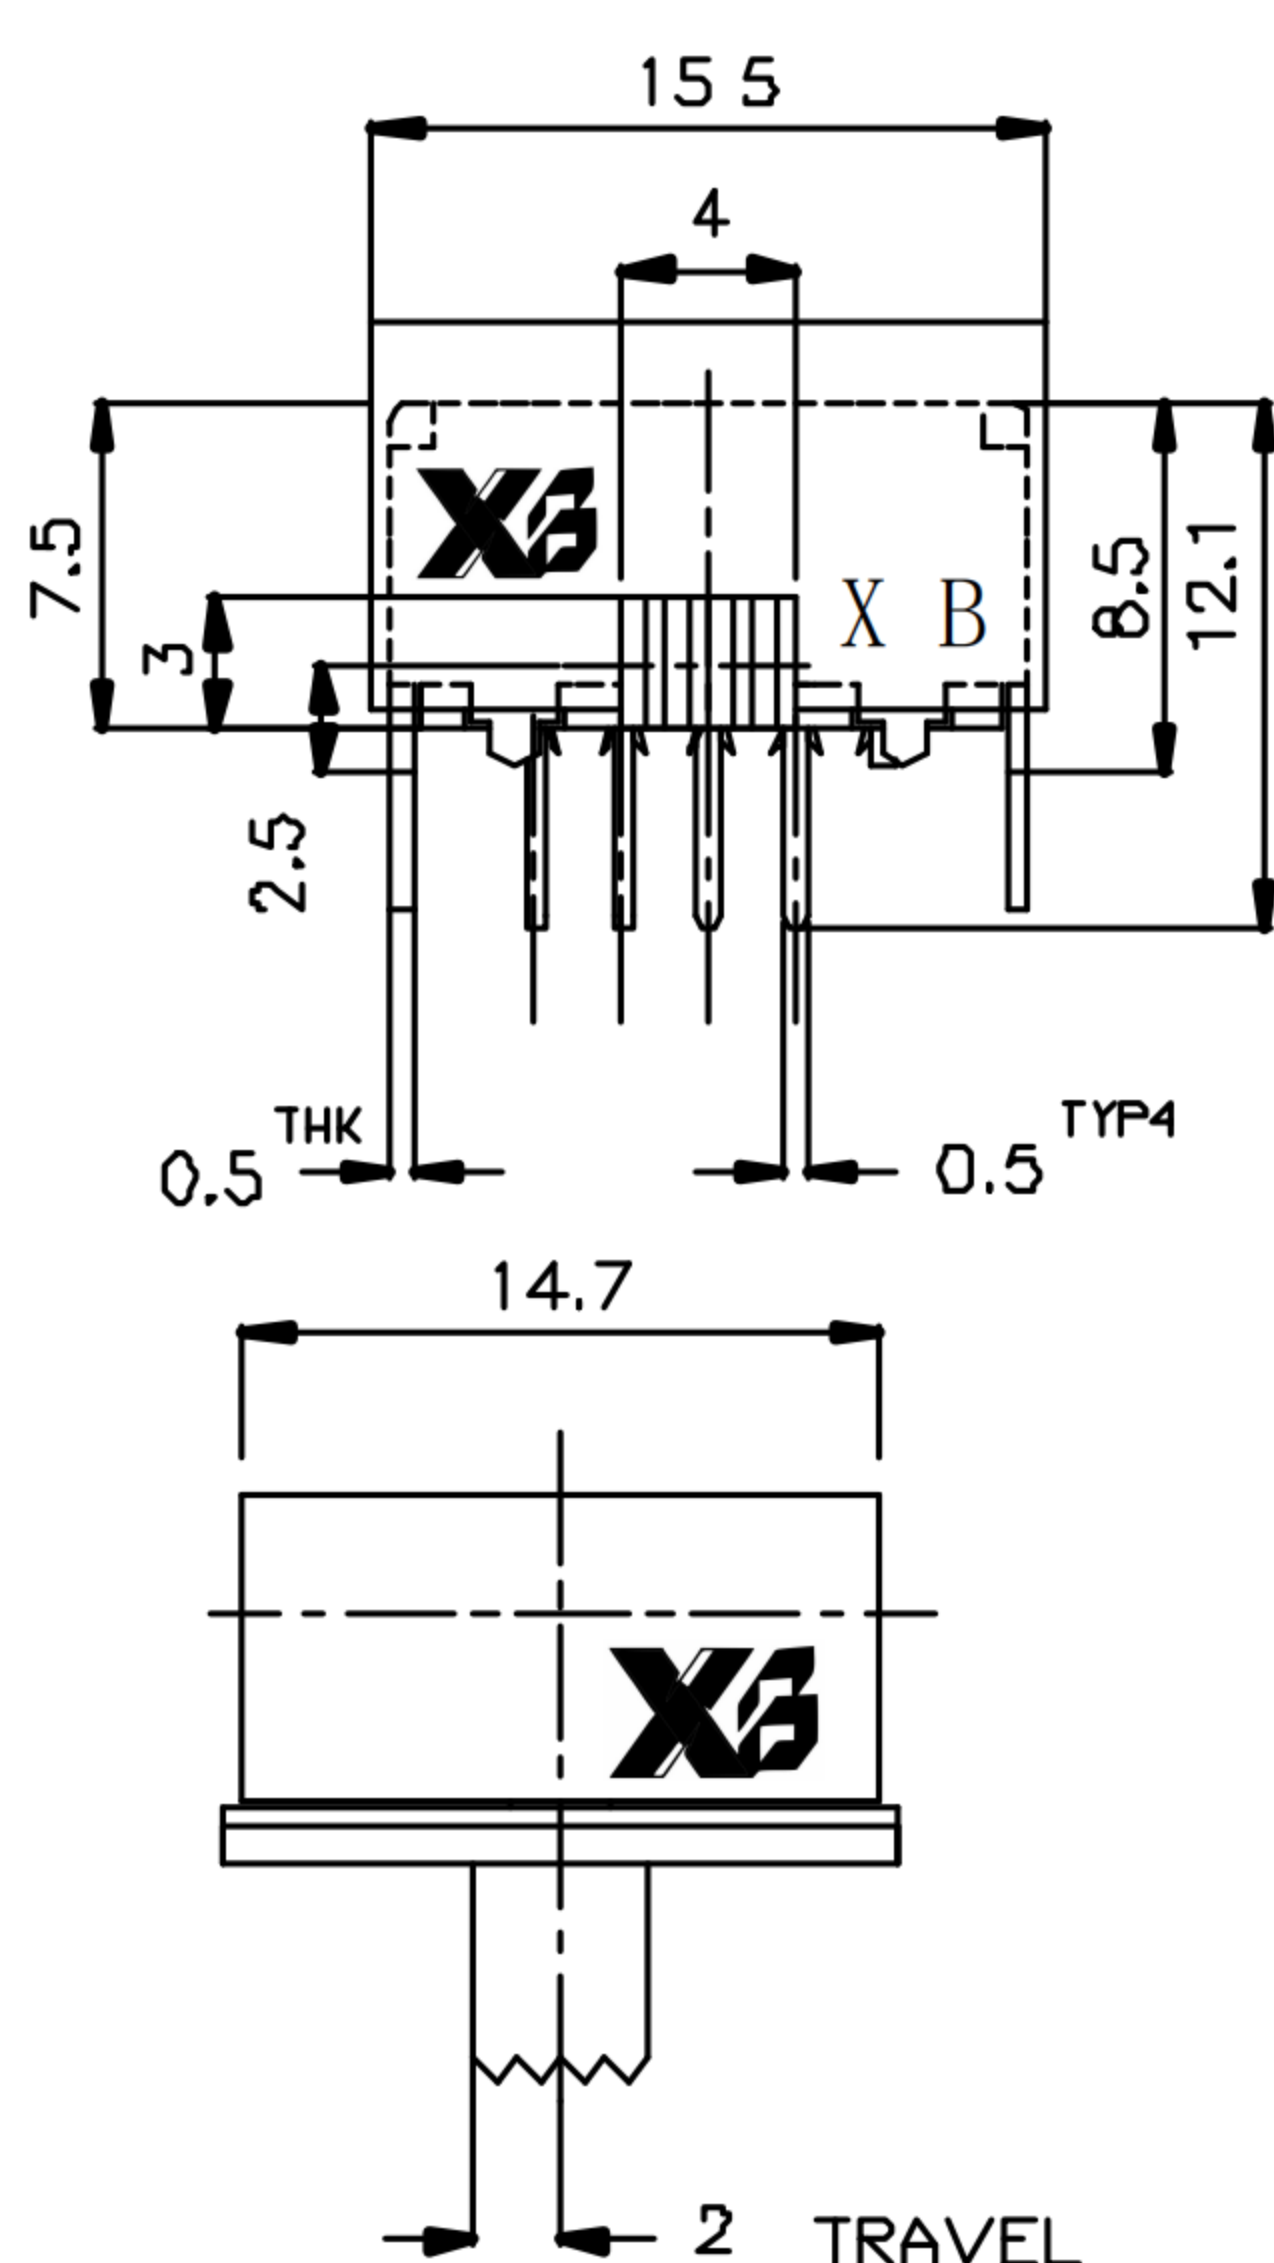

SPECIFICATION (INITIAL)

RATING:	DC 50V 0.5A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ AT 500V DC
WITHSTAND VOLTAGE:	AC 500V FOR 1 MIN
OPERATION FORCE:	300±150g
SWITCHING LIFE:	10,000 Cycles(6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

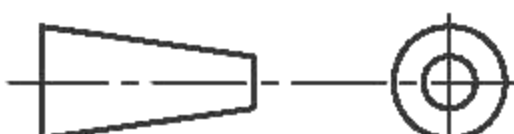 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD									
TITLE : HORIZONTAL SLIDE SWITCH									
MODEL : XB-SK-13D03									
UNIT : MM	DWN.	ZENQ. CHEN	DATE		 TOLERANCE ≤1.5mm±0.1 > 1.5mm±0.2 ≥10mm±0.3 ANGLE ±2°				
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE						
VBRSION	01	APPD.	FEI. LONG. HE	DATE					
					NO.	PART NAME	MATERIAL	QTY.	FINISHING
					7	SPRING	STEEL WIRE	1	NATURE
					6	STEEL BALL	STEEL	1	NATURE
					5	BOARD	PHENOLIC RESIN	1	NATURE
					4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
					3	FRAME	IRON STRIP	1	Ni PLATED
					2	TERMINAL	BRASS STRIP	8	Ag PLATED
					1	KNOB	POM	1	BLACK