

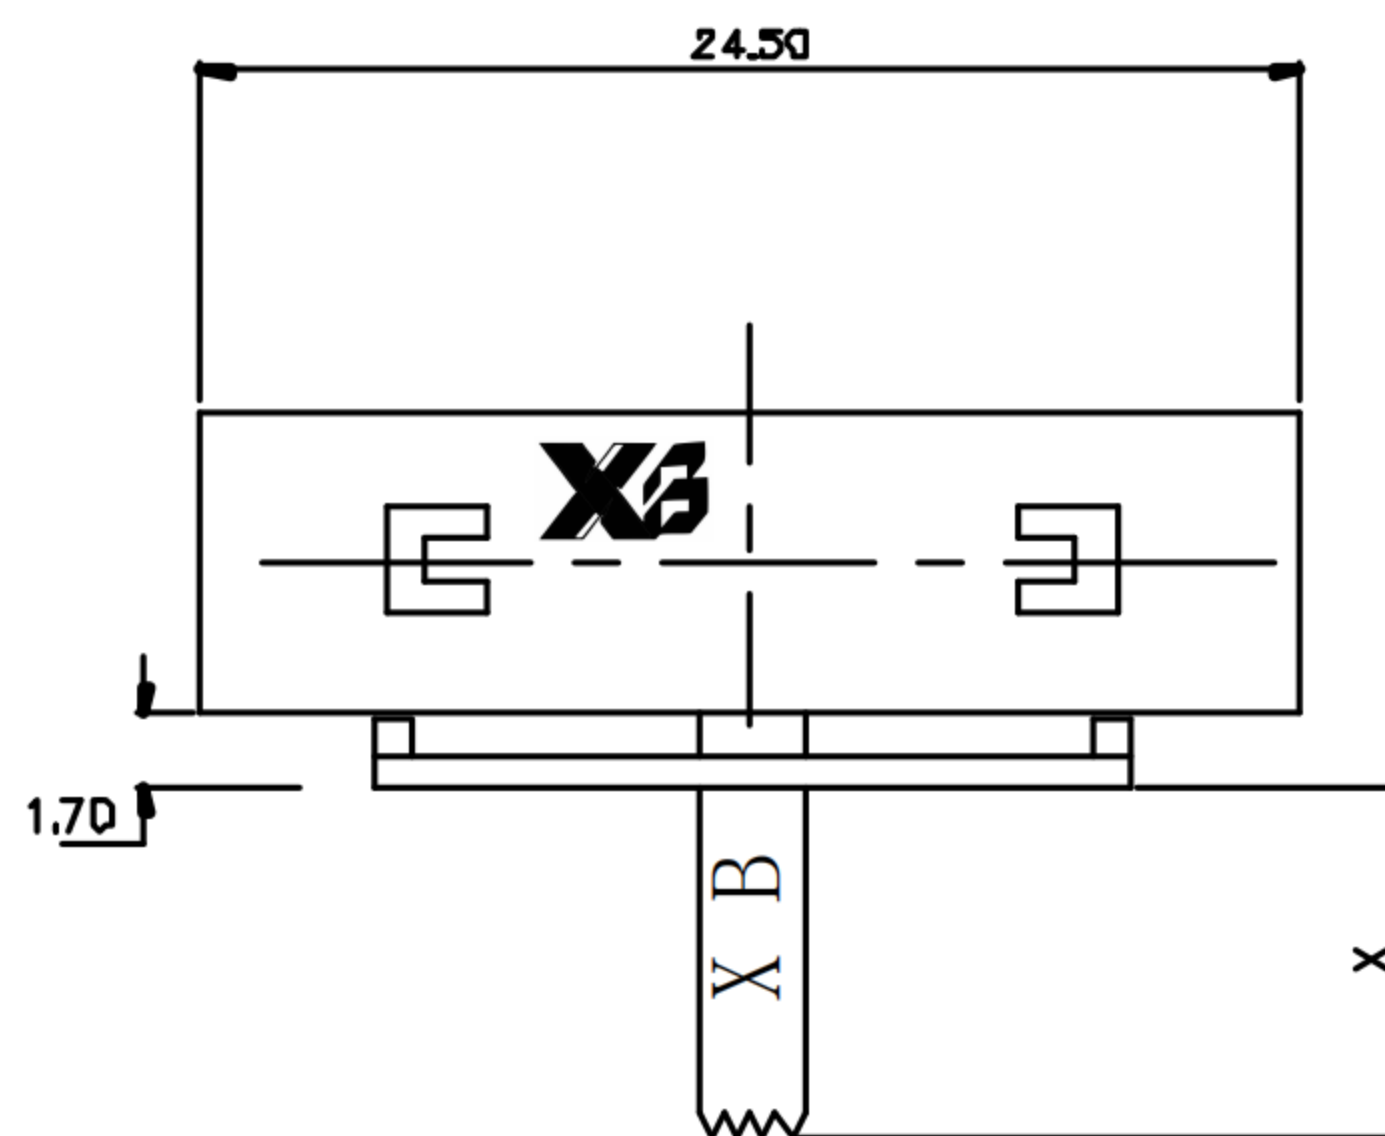
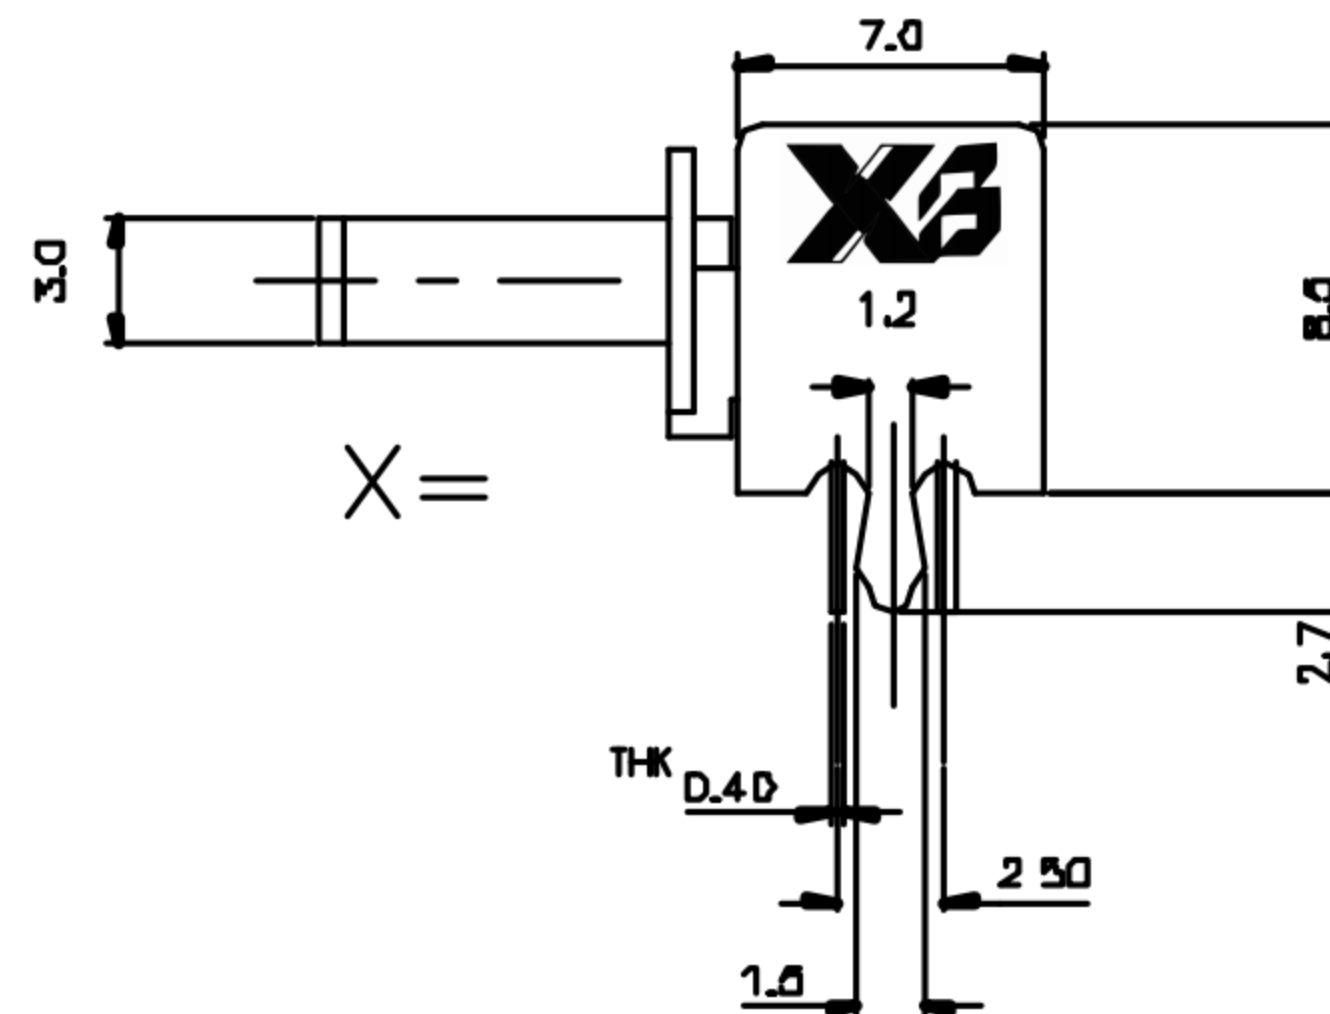


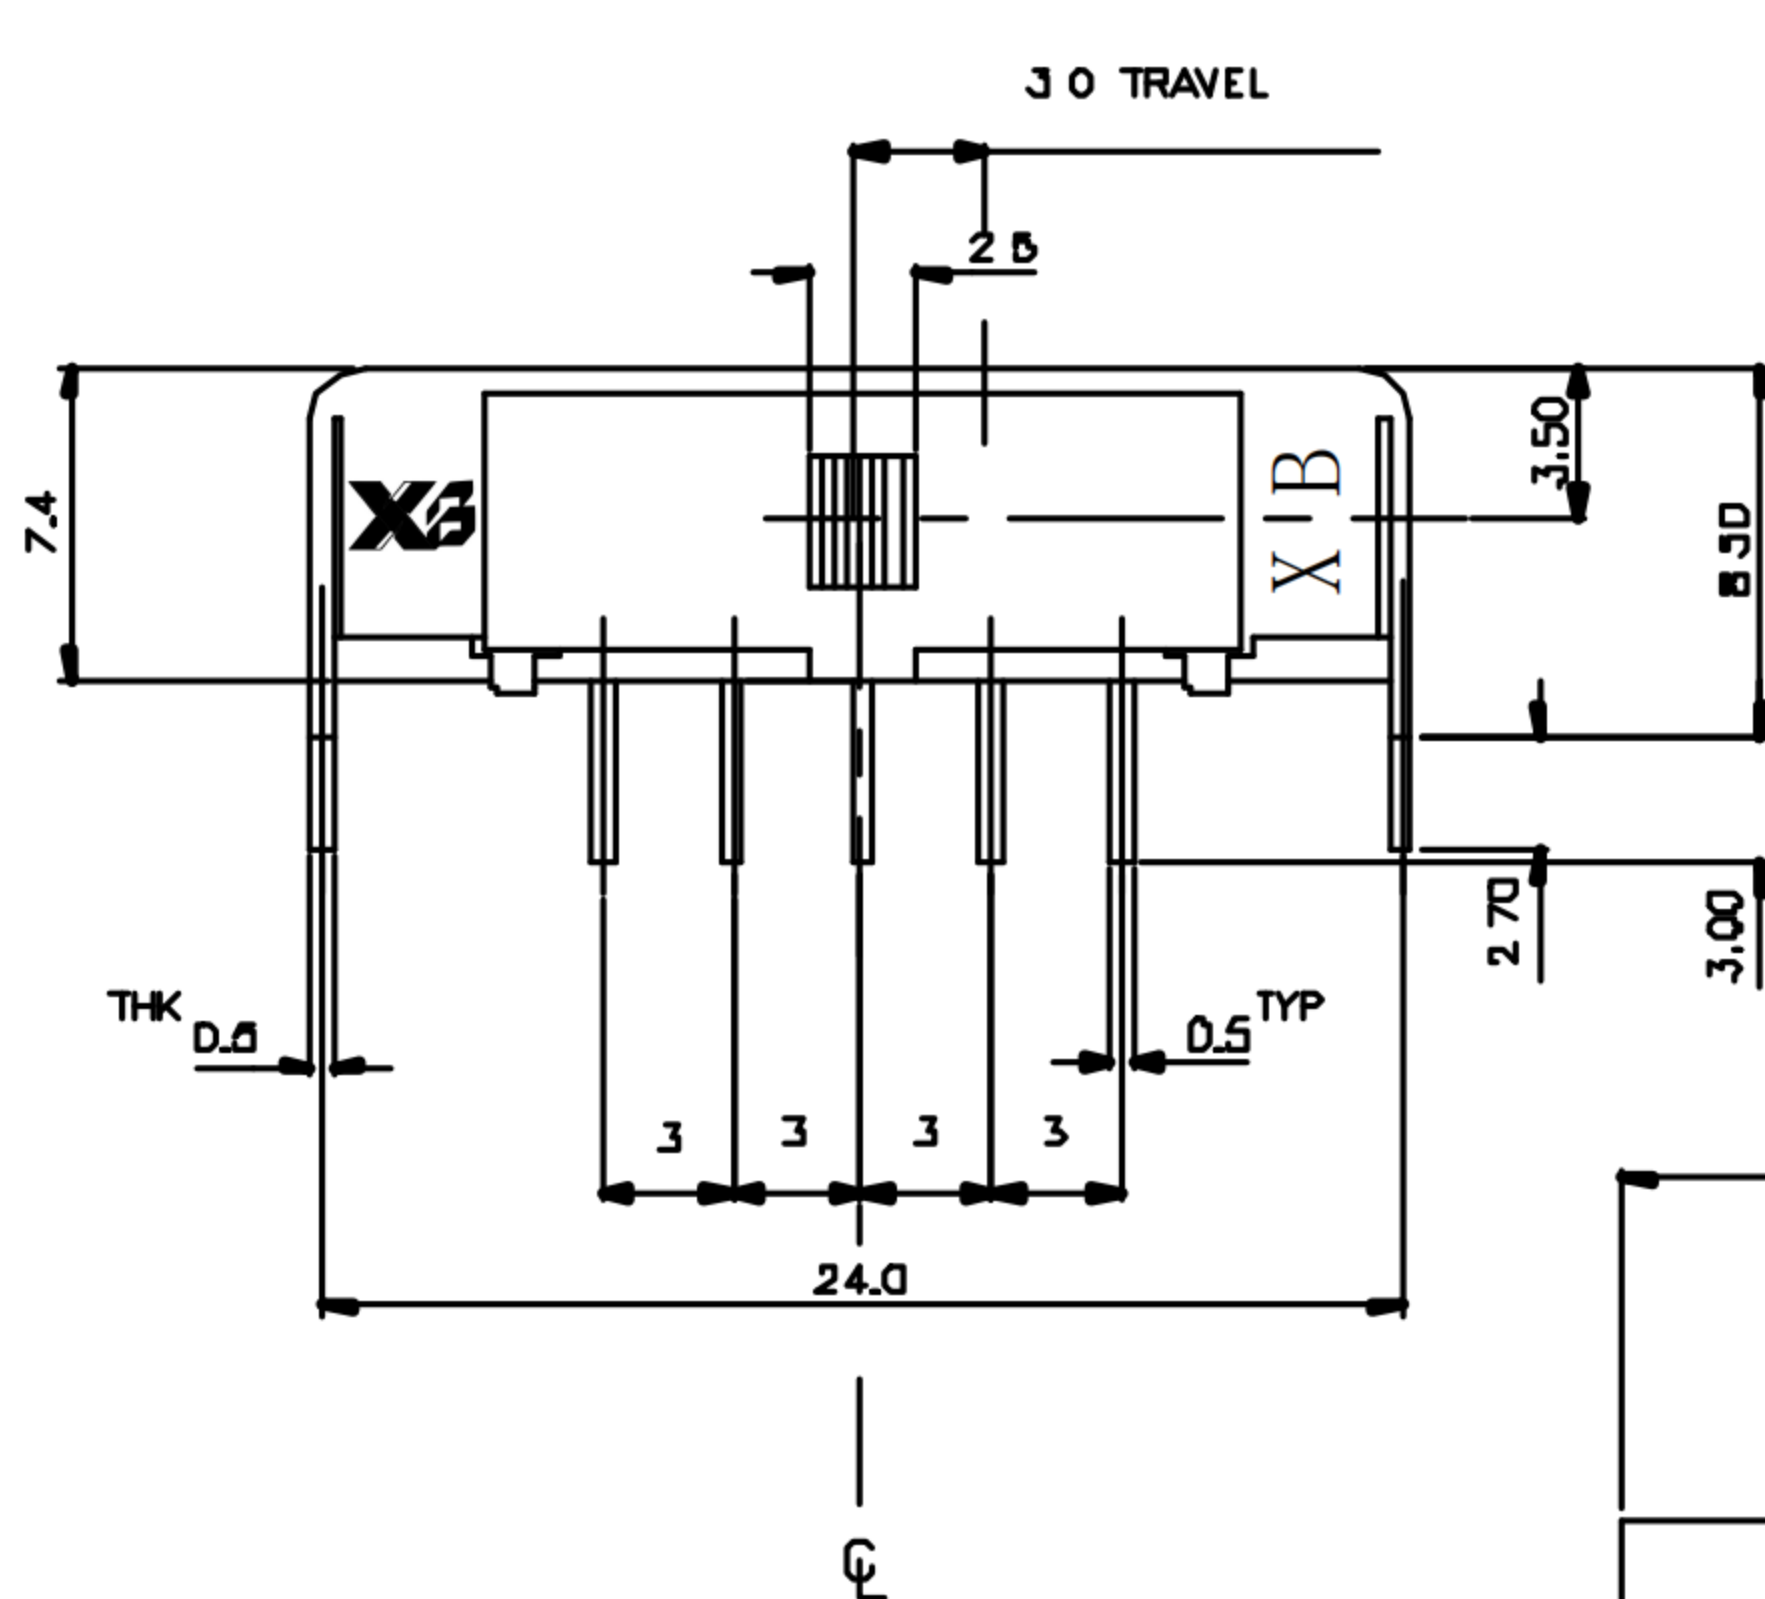

ROHS

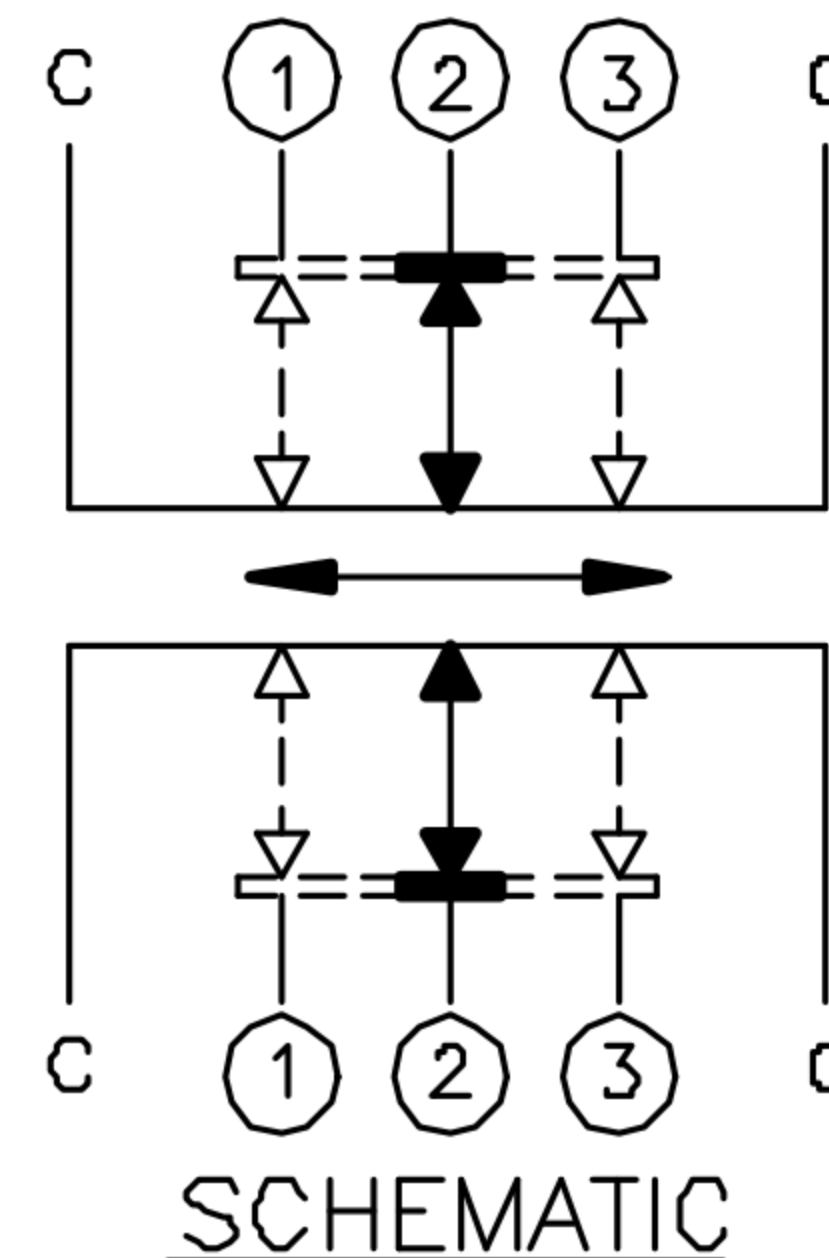

SPECIFICATION (INITIAL)

RATING:	DC 50V 0.5A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	400±200g
SWITCHING LIFE:	10K Cycles(6-10c/m Loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD													
		TITLE : HORIZONTAL SLIDE SWITCH									MODEL : XB-SK-23F03				
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°	6	STEEL BALL	STEEL	1	NATURE			
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE				5	BOARD	PHENOLIC RESIN	1	NATURE			
VERSION	01	APPD.	FEI. LONG. HE	DATE				4	CONTACT CLIP	PBS STRIP	2	Ag PLATED			
								3	FRAME	IRON STRIP	1	Ni PLATED			
								2	TERMINAL	BRASS STRIP	8	Ag PLATED			
								1	KNOB	POM	1	BLACK			
								NO.	PART NAME	MATERIAL	QTY.	FINISHING			