
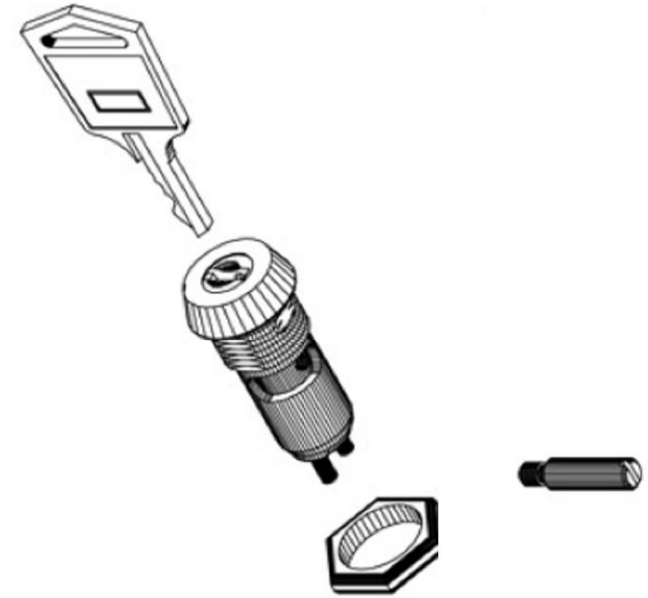
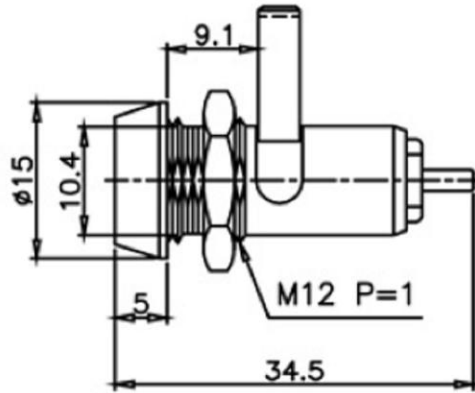


Unit: mm



Recommended hole size

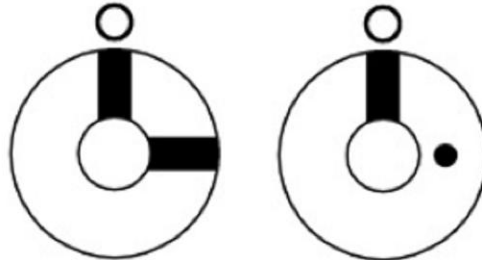


Fig.1

Fig.2

Mechanical key switch




Zinc alloy die cast housing and cylinder.
Stainless steel capped bezel.
Chrome plated standard.
4 disc tumbler mechanism.
Brass keys, nickel plated.

"L" dimension 13mm standard; other dimensions available upon request.

Dual-functioned Key Lock Switch.
Silver plated contacts and terminals.
2 position (off-on) 2 terminals.
Hex nut or speed clip mounted.

Fig No	Lock Number	Pole	Positions	Terminals	Key Pulls	Turn	⬆	➡	Type
1	S1096-1	1	2	2	1	90°	Off	On	SPST
2	S1096-2	1	2	2	2	90°	Off	On	SPST

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 <p>东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD</p>											
					TITLE : XB KEY SWITCH ELECTRONIC LOCK						
MODEL : XB-S-1096											
UNIT : MM	DWN.	ZENQ. CHEN	DATE		TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°	7	SPRING	STEEL WIRE	1	NATURE
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE				6	STEEL BALL	STEEL	1	NATURE
VBRSION	01	APPD.	FEI. LONG. HE	DATE			5	BOARD	PHENOLIC RESIN	1	NATURE
							4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
							3	FRAME	IRON STRIP	1	Ni PLATED
							2	TERMINAL	BRASS STRIP	8	Ag PLATED
							1	KNOB	POM	1	BLACK
							NO.	PART NAME	MATERIAL	QTY.	FINISHING