

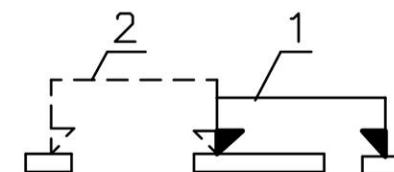


Technical drawing of a mechanical part, likely a valve or actuator, showing dimensions and labels. The drawing includes a side view and a top view. Key dimensions include: 4 (TRAVEL), 3, 11.0, 0.5 TYP, 4.0, 1 TYP, 2 TYP, and 3. The part is labeled 'X3'.

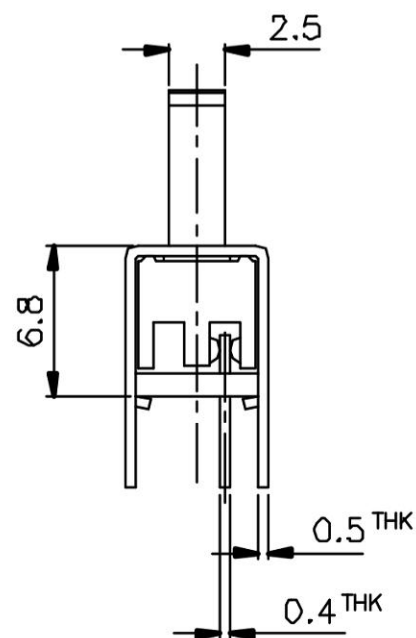

NON-SHORTING SCHEMATIC

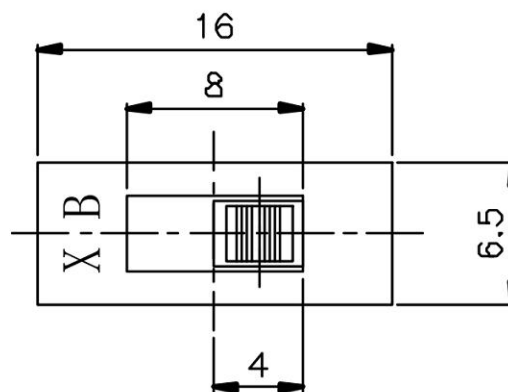


RATING:	DC 50V 0.5A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	200 ± 100g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB SLIDE SWITCH

MODEL : XB-SS-12H03X



TOLERANCE
 $\leq 1.5\text{mm} \pm 0.1$
 $> 1.5\text{mm} \pm 0.2$
 $\geq 10\text{mm} \pm 0.3$

ANGLE
 $\pm 2^\circ$

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING