
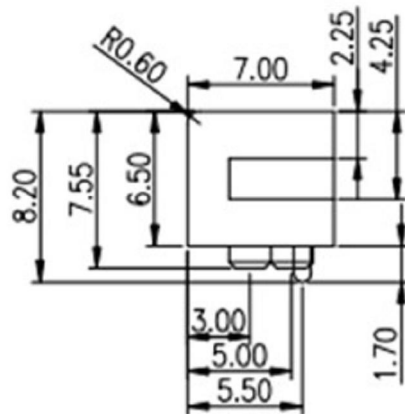
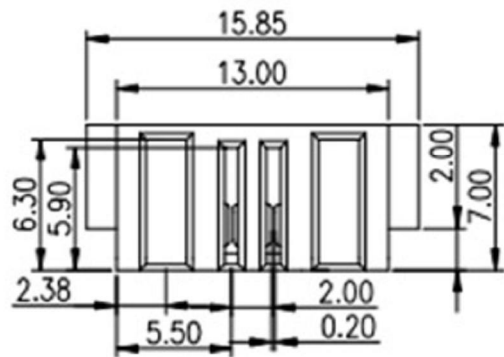
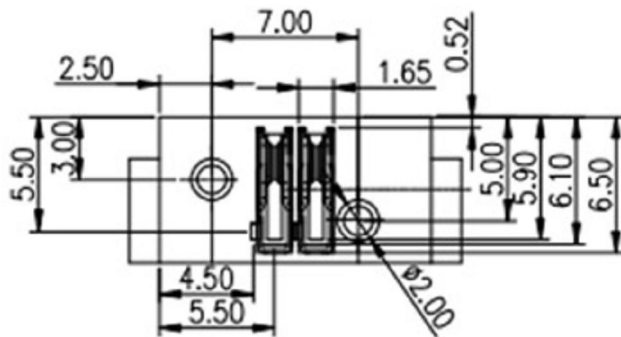


Recommended P.C.B Layout

Recommended P.C.B Layout
Layout Tolerance=+/-0.05mm

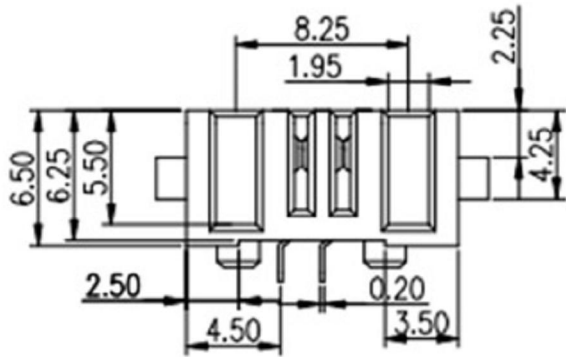

Material
Insulator:Nylon 9T(UL94V-0)
TERMINAL: C2680
TERMINAL:Plated Gold over
Nickel or Tin
Specification
Current rating:8A
instant CURRENT:12A
Contact Resistance:30mΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting
Temperature:-40°~105°

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.50 X.x ±0.30 X.xx ±0.20 ANGULAR ±2°	DESIGN	GAO PENG	DATE	TITLE: Battery holder connector	
	APPROVED	PANG. DONG	DATE		
	PART	XB-A01F-H1-A-2P		REV: 01	SCALE:1:1
	NO			SIZE: A4	UNIT: mm
	DRAWING			SHEET:1/1	