

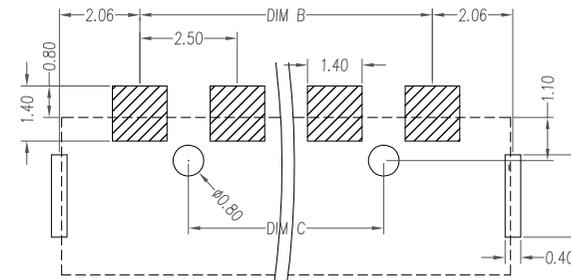
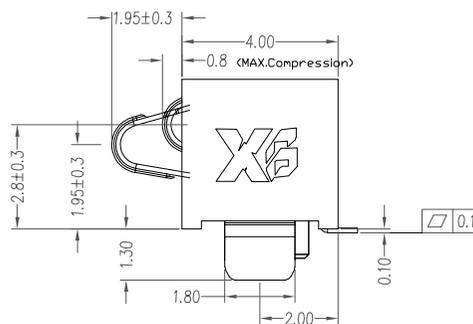


性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP
- 接触点(材质): 磷铜, 触点镀金3U"
- 使用寿命: 3000次以上

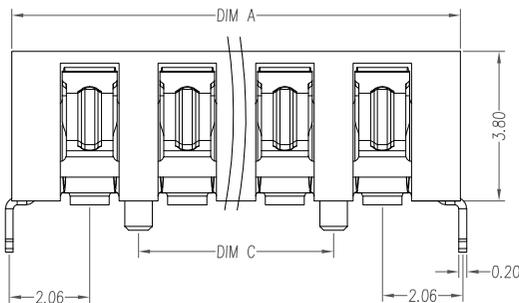

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

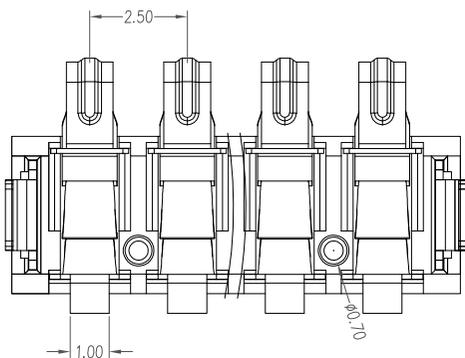

PART NO.	DIM A	DIM B	DIM C
XB-BC-15-2P380C	6.5	2.5	无柱
XB-BC-15-3PD380C	9.0	5.0	2.5
XB-BC-15-4PD380C	11.5	7.5	5.0
XB-BC-15-5PD380C	14.0	10.0	7.5
XB-BC-15-6PD380C	16.5	12.5	10.0

版本REV. 更新标记 REVISION NOTE 日期 DATE	未注公差 TOLERANCE	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONIC CS CO., LTD.
	X. ±0.35	
	X.XX ±0.25	品名ARTICLE: <h2 style="text-align: center;">电池连接器</h2>
绘制DRAWN	X.XX ±0.15	
设计DES'D	X.XXX ±0.05	
审核CHK'D	高鹏	视图方法 PROJECTION
批准APPV'D	赖海杰	图号MODEL: XB-BC-15系列固定片插板
	贺龙飞	比例SCALE: 单位UNIT: mm 页码SHEET: 共1页 第1页