

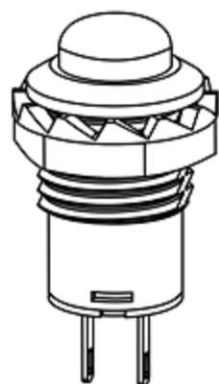





ROHS




CUT-OUT



Rating: 3A 125V AC
1.5A 250V AC
Contact Resistance: 20mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC 1000V 1minute
Operating Force: 450±100g
Travel: 3.0±0.5mm
Mechanical Life: Over 30,000 cycles
Electrical Life: Over 10,000 cycles
Operating Temperature: -20℃~+85℃
Soldering Temperature: 256℃ for 5 Seconds
Function: OFF-ON
Welding method: Manual Soldering (350° C±5° C, 3s±0.5s)

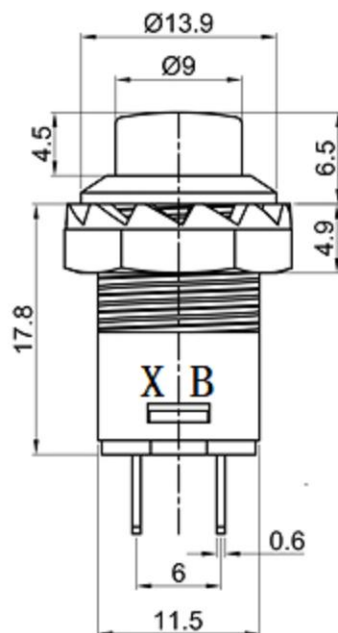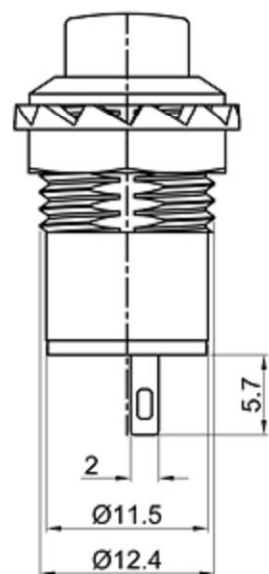

FUNCTION

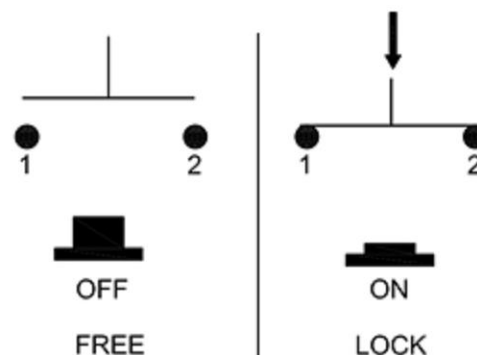

2P SPST

W	白色
B	黑色
G	绿色
Y	黄色
R	红色
上盖颜色 X Cap color X	

MATERIAL:
Actuator: SUS ;
Top Base: SUS;
Bottom Base: PA66+GF ;
Terminal: Brass, Silver plated ;
Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD									
		TITLE : PUHS BUTTON SWITCH									
		MODEL : XB-PBS1-10M									
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE ≤1.5mm±0.1 > 1.5mm±0.2 ≥10mm±0.3	ANGLE ±2°				
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE							
VERSION	01	APPD.	FEI. LONG. HE	DATE							