



X= 3MM-15MM

ROHS

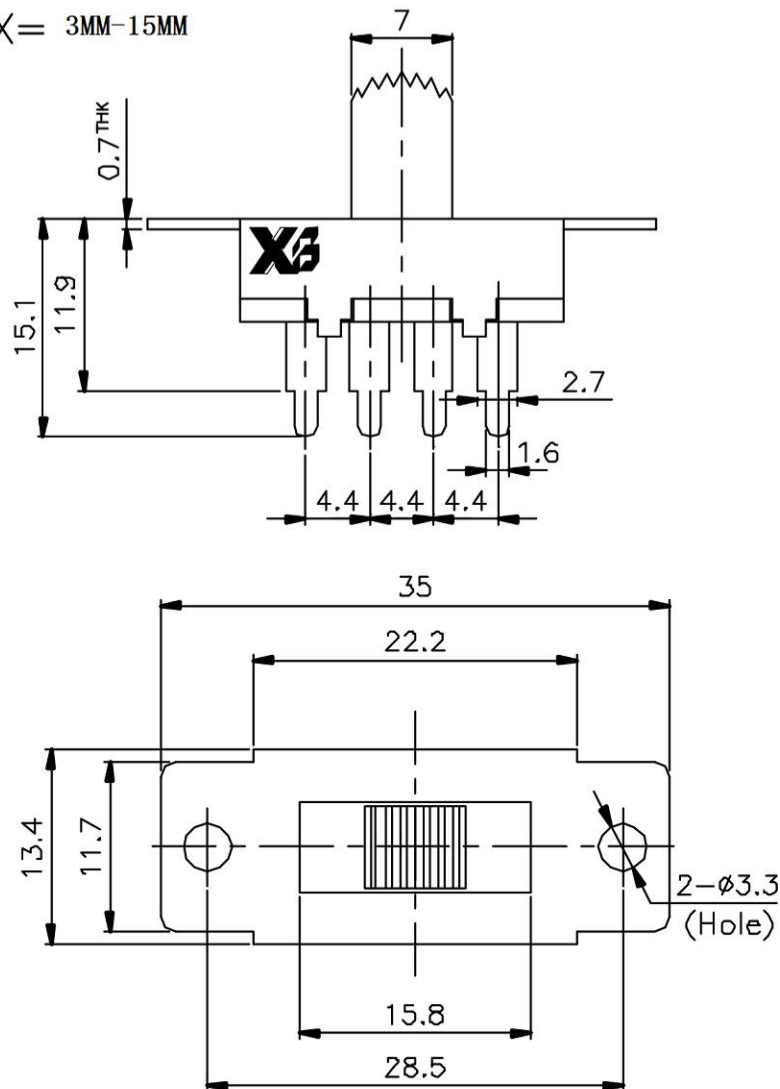

SLIDE SWITCH 1P3T



SCHEMATIC

SLIDE SWITCH 1P3T

SPECIFICATION (INITIAL)	
RATING:	3A 6A 125V 250V AC
CONTACT RESISTANCE:	Not more than 30m Ω
INSULATION RESISTANCE:	500M Ω at 500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	750 $\pm$ 250g
SWITCHING LIFE:	10000cycles(6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB SLIDE SWITCH

MODEL : XB-SS-13i08X



TOLERANCE
<=1.5mm $\pm$ 0.1
> 1.5mm $\pm$ 0.2
>=10mm $\pm$ 0.3

ANGLE
 $\pm$ 2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE						
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE						
VBRSION	01	APPD.	FEI. LONG. HE	DATE					
NO.	PART NAME	MATERIAL	QTY.	FINISHING					