

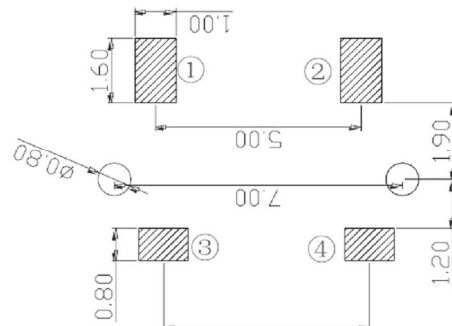

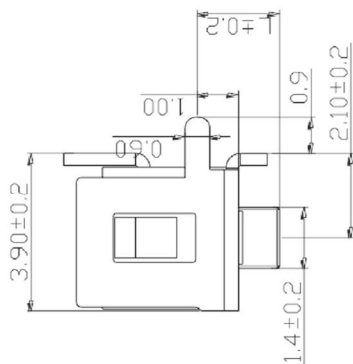
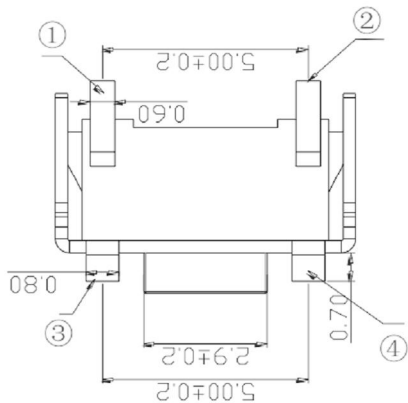
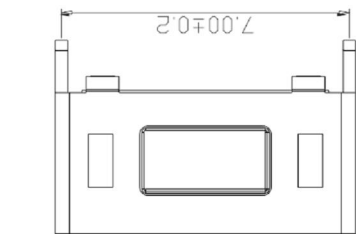



ROHS

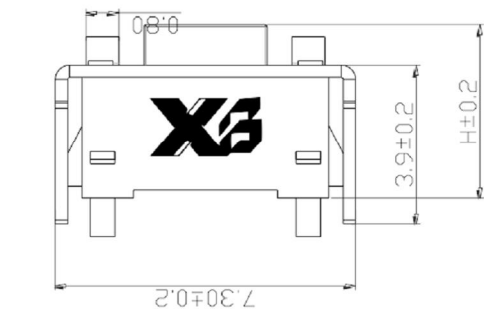

PCB. 焊接图

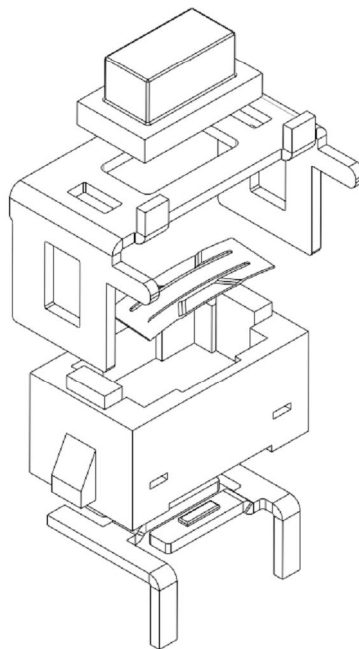

SCHEMATIC

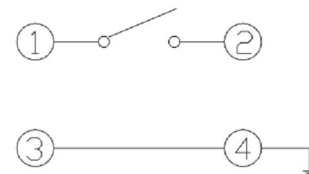

电路图

H	L
4.00	1.70
4.30	2.00
4.50	2.20
5.00	2.70
6.00	3.70
7.00	4.70
8.00	5.70

主要技术规格:

1. 额 定 值: 50mA DC12V
2. 接触电阻: $\leq 100m\Omega$
3. 操 作 力: $250\pm 40gf/160\pm 30gf$
4. 行 程: $0.25\pm 0.1mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿 命: 50,000 Cycles

材料:

- 本体: PPA (黑色)
按钮: PPA (黑色, 白色)
卡件: 黄铜 (镀银)
弹片: 不锈钢 (复银)
盖板: 黄铜 (镀铜锡)



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB TACT SWITCH

MODEL : XB-3X6X4.0



TOLERANCE
 $\leq 1.5mm \pm 0.1$
 $> 1.5mm \pm 0.2$
 $> 10.0mm \pm 0.3$

ANGLE TOL
 $\pm 2^\circ$

8	REEL	PS	1	BLUE
7	CARRIER	PS	1	CLEAR
6	COVER TAPE	PS	1	CLEAR
5	CONTACT	PBS STRIP	1	Ag CLAD
4	COVER	IRON STRIP	1	Ni PLATED
3	CASE	NYLON	1	BLACK
2	TERMINAL	BRASS STRIP	2	Ag PLATED
1	KNOB	NYLON	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 5 : 1	CHK'D	PENG. GAO	DATE	
VERSION	01	APPD.	FEI. LONG. HE	DATE