




ROHS

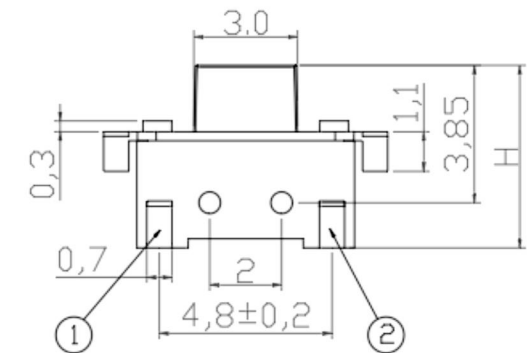



H
5.0
4.3

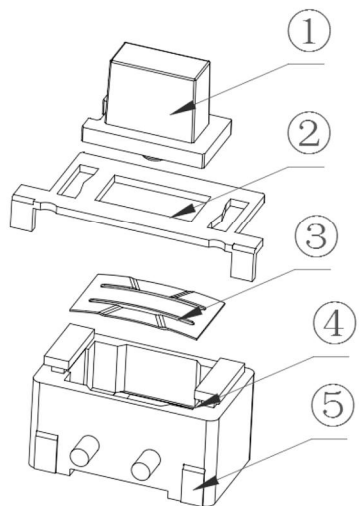


SCHEMATIC



电 路 图

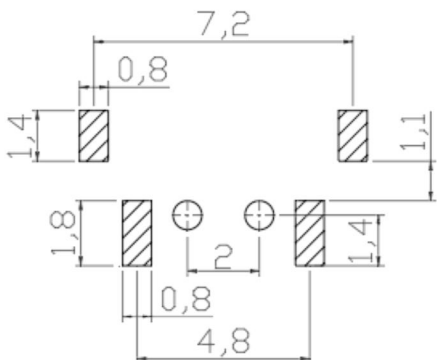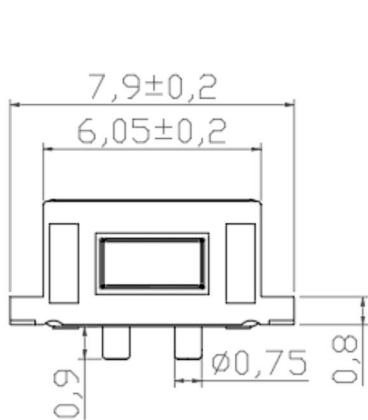

PCB. 焊接图



主要技术规格:

- 1. 额 定 值: 50mA DC12V
- 2. 接触电阻: ≤50mΩ
- 3. 操 作 力: 250±40gf
- 4. 行 程: 0.20±0.1mm
- 5. 绝缘电阻: ≥100MΩ
- 6. 抗电强度: 250V 50HZ 1Min.
- 7. 寿 命: 50,000Cycles

序号	零件名称	材料规格	数量	备注
5	引脚、触点	黄铜	1	镀银
4	基座	LCP&PPA	1	耐温280℃ (黑色)
3	簧片	不锈钢	1	覆银
2	盖板	黄铜	1	镀锡
1	按钮	PPA&硅胶	1	耐温280℃



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB TACT SWITCH

MODEL : XB-3X6X4. 3F



TOLERANCE
≤1.5mm ± 0.1
> 1.5mm ± 0.2
>=10.0mm ± 0.3

ANGLE TOL
± 2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 5 : 1	CHK'D	PENG. GAO	DATE	
VERSION	01	APPD.	FEI. LONG. HE	DATE

8	REEL	PS	1	BLUE
7	CARRIER	PS	1	CLEAR
6	COVER TAPE	PS	1	CLEAR
5	CONTACT	PBS STRIP	1	Ag CLAD
4	COVER	IRON STRIP	1	Ni PLATED
3	CASE	NYLON	1	BLACK
2	TERMINAL	BRASS STRIP	2	Ag PLATED
1	KNOB	NYLON	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING