

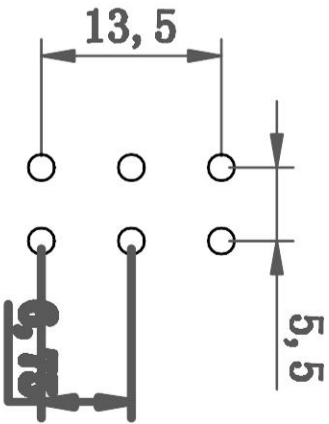
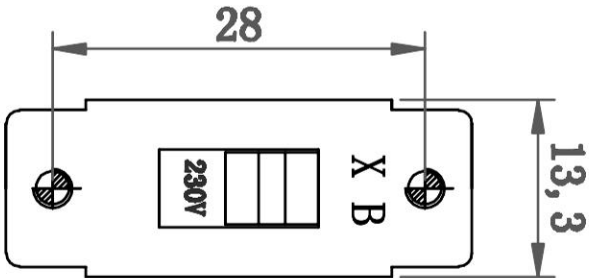
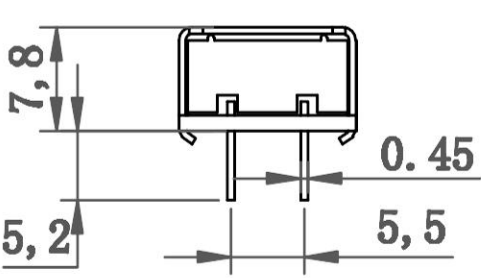


ROHS

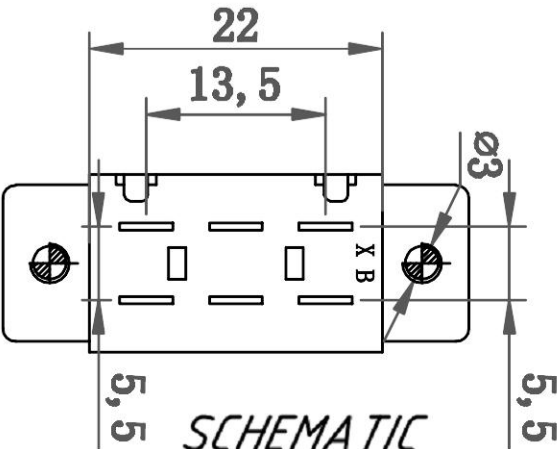


开孔尺寸

序号	名称	数量	材料
1	外壳	1	宝钢铁皮
2	推子	1	PA66
3	底板	1	胶木板
4	焊脚	6	黄铜电镀
5	弹簧	2	碳索钢丝
6	跳板	2	黄铜电镀

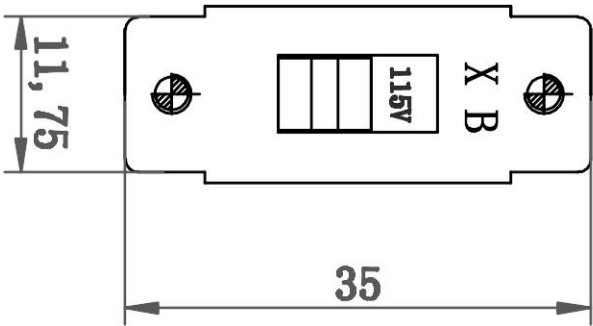

SCHEMATIC




线路图

2P2T

SPECIFICATION (INITIAL)				
RATING: 3A 6A 125V 250V AC				
CONTACT RESISTANCE: Not more than 30mΩ				
INSULATION RESISTANCE: 500MΩ at 1500V DC				
WITHSTAND VOLTAGE: AC 500V for 1 min				
OPERATION FORCE: 300±100g				
SWITCHING LIFE: 10000 Cycles (6-10c/m loading)				

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.

 Switch Connector	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD					 TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	 ANGLE ±2°					
	TITLE : XB SLIDE SWITCH											
	MODEL : XB-CH-Z08 2P2T											
UNIT : MM		DWN.	ZENQ. CHEN	DATE				7	SPRING	STEEL WIRE	1	NATURE
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE				6	STEEL BALL	STEEL	1	NATURE
VERSION		01	APPD.	FEI. LONG. HE	DATE			5	BOARD	PHENOLIC RESIN	1	NATURE
								4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
								3	FRAME	IRON STRIP	1	Ni PLATED
								2	TERMINAL	BRASS STRIP	8	Ag PLATED
								1	KNOB	POM	1	BLACK
								NO.	PART NAME	MATERIAL	QTY.	FINISHING