



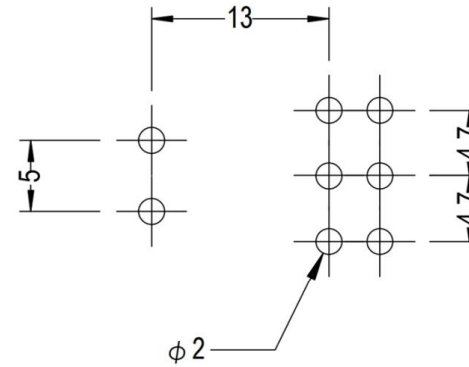
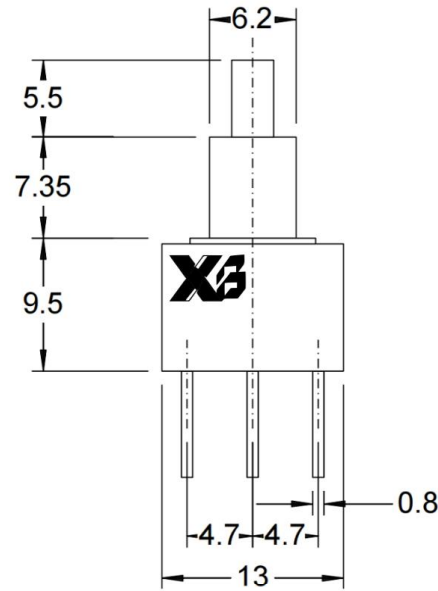


CAD FILE:

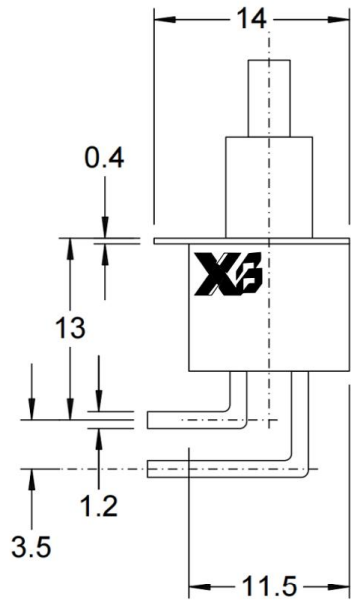

配件：按帽



SCHEMATIC

CIRCUIT : ON-ON(2P2T)

SPECIFICATIONS

CONTACT RATING	: 5A with resistive load @ 120 VAC or 28 VDC.
ELECTRICAL LIFE	: 50,000 make-and-break cycles at full load.
CONTACT RESISTANCE	: 10mΩ max. initial @ 2.4 VDC. 100mA for both coin silver and gold plated contacts.
INSULATION RESISTANCE	: 1,000MΩ min.
DIELECTRIC STRENGTH	: 1,000V RMS @ sea level.
OPERATING TEMPERATURE	: -30°C to 130°C.

8					TOLERANCE							
7					UNLESS SPECIFIED							
6					WITHIN 1.5mm : ±0.1mm		A	2012-9-25	初 版			ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm		ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Button switch				UNIT : mm	DRWG NO.: XB-PB-104M		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-PB-104M				SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.				CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK					APPD.	ZENQ. CHEN	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH								