


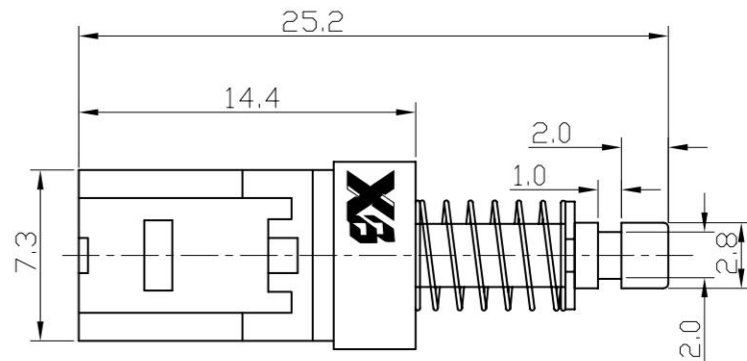



ROHS

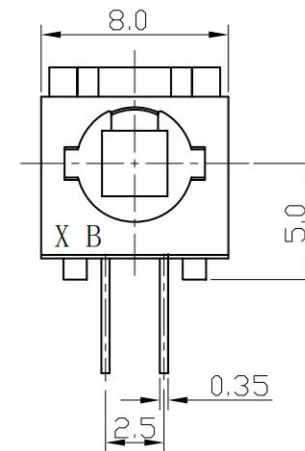

P. C. B LAYOUT

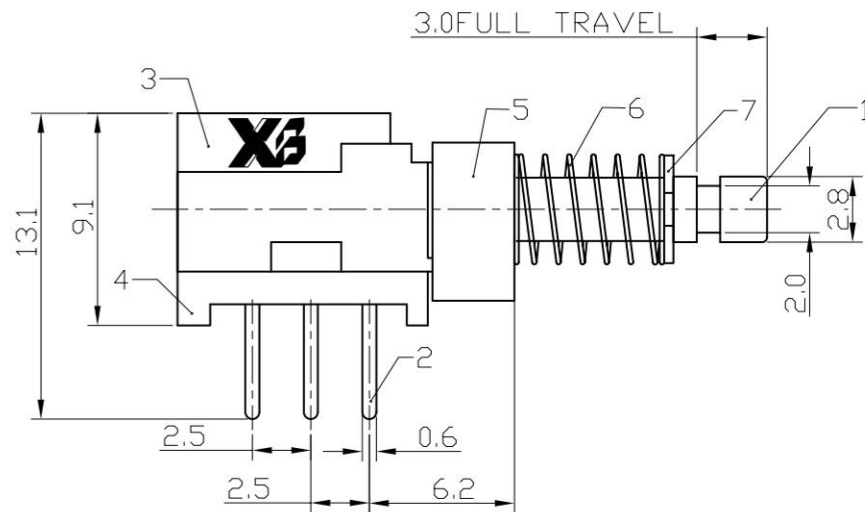

ITEM: PERFORMANCE

Title: PUSH BUTTOMN SWICH

Model: XB-PBS-22D04

Rating: 0.3A 0.5A 12V 30V DC

Function: 2P2T

Timing: Non-shorting

ContactResistance(mohms):50mΩ max

Insulation Resistanc(Mohms):100MΩ min at 500V DC

Dielectric Strength(V):AC 500V for 1 min

LifeTest:10,000 Cycles




东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : PUSH BUTTON SWITCH

MODEL : PBS22D04 (G) (W106)



TOLERANCE
<=1.5mm ± 0.1
>1.5mm ± 0.2
>=10mm ± 0.3

ANGLE
± 2°

NO.	PART NAME	MATERIAL	QTY.	FINISHING
8	CONTACT CLIP	PBS STRIP	2	Ag CLAD
7	RING	IRON STRIP	1	Zn PLATED
6	SPRING	SUS	1	NATURE
5	SLEEVE	POM	1	GRAY
4	CASE	NYLON	1	GRAY
3	COVER	PBT	1	GRAY
2	TERMINAL	BRASS STRIP	6	Ag PLATED
1	KNOB	POM	1	YELLOW

UNIT : MM	DWN.	DATE	TOLERANCE	ANGLE
SCALE : 3 : 1	CHK'D	DATE	<=1.5mm ± 0.1	± 2°
VERSION	APPD.	DATE	>1.5mm ± 0.2	
01			>=10mm ± 0.3	