

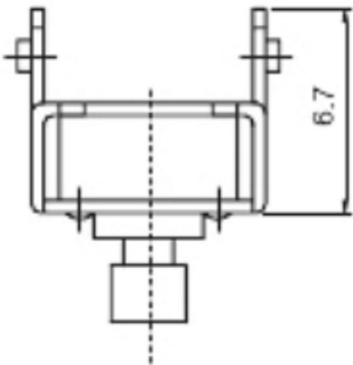
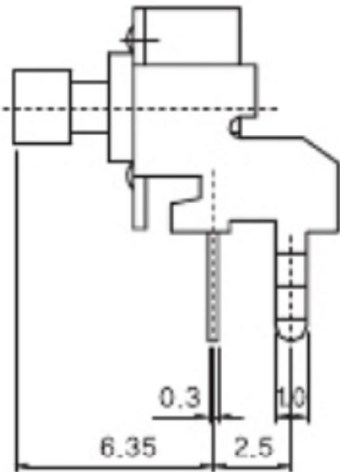
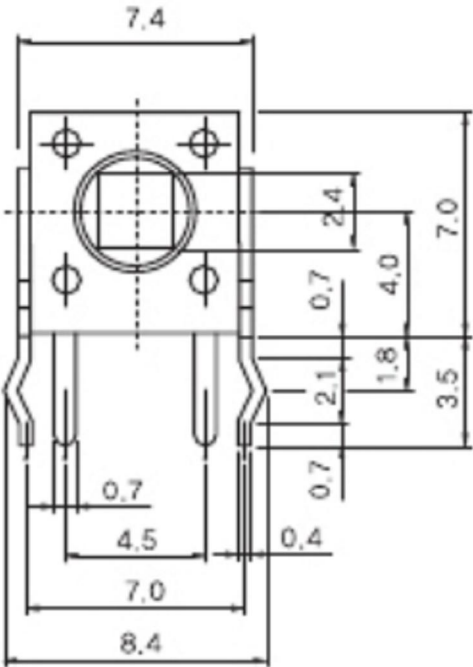


ROHS



CIRCUIT DIAGRAM



SPECIFICATION

Contact Rating: 50mA,12V DC
Contact Resistance: 100mΩ max
Insulation Resistance: 100mΩ min.500V DC
Dielectric Strength: 250V AC/1minute
Travel: 0.25mm
Operating Temp: -30℃~+85℃
Storage Temp: -30℃~+80℃

PAPT NO	XB-TC-1102-FX
Operating Force	A:100gf B:160gf C:260gf
Height	H:7.3

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB TACT SWITCH

MODEL : XB-TC-1102-FX



TOLERANCE
<=1.5mm ± 0.1
> 1.5mm ± 0.2
>=10.0mm ± 0.3

ANGLE TOL
± 2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE		8	REEL	PS	1	BLUE
SCALE : 5 : 1	CHK'D	PENG. GAO	DATE		7	CARRIER	PS	1	CLEAR
VERSION	01	APPD.	FEI. LONG. HE	DATE	6	COVER TAPE	PS	1	CLEAR
					5	CONTACT	PBS STRIP	1	Ag CLAD
					4	COVER	IRON STRIP	1	Ni PLATED
					3	CASE	NYLON	1	BLACK
					2	TERMINAL	BRASS STRIP	2	Ag PLATED
					1	KNOB	NYLON	1	BLACK
					NO.	PART NAME	MATERIAL	QTY.	FINISHING