

Specifications  
 Current Rating:1.0Amp  
 Insulation Resistance:500MΩMin.  
 Dielectric Withstanding Voltage:250VAC  
 Contact Resistance:100mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials

Contact Material:Phosphor Bronze  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material


★All materials must meet GREENCONN hazardous substances control standards.

★: Critical Characteristics indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

★: Safety Features indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

**與CBZZ202系列配對使用**

Recommended P.C.Board Layout  
 (Tolerance:±0.05)

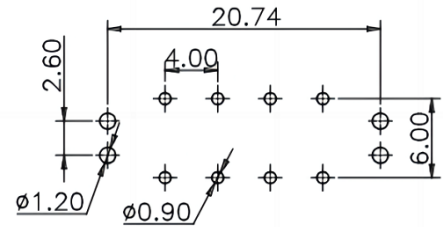

## Ordering Information

G BZZ202 - 04 XX A 001 C 1 S X

No. Of Pins Per Row 04  
 Standard Plating 08=5u"gold on contact/  
 gold flash on other area  
 Color 1=Black  
 Standard Packing H=Acetate tape+Tape&Reel



3RD.ANG PROJ.  
  
 SCALE: 3:1  
 PAGE: 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.  
**XB-CBZZ-202**  
 PART NO.  
**XB-CBZZ-202**

TITLE.  
 4.00mm PITCH MALE  
 FLOATING CONNECTOR  
 MATING H25.00mm