
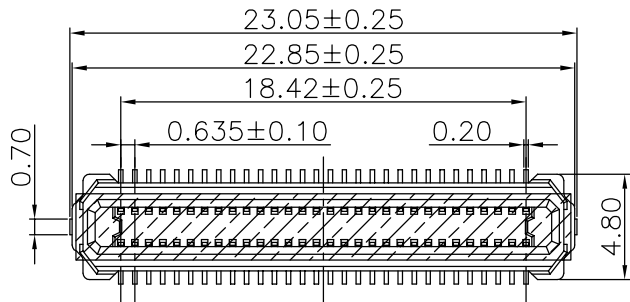
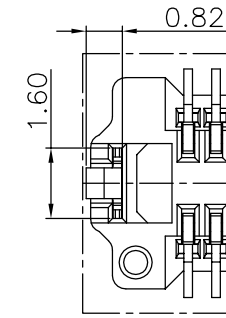
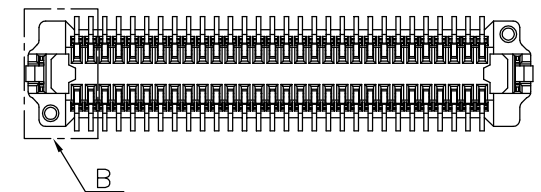




SECTION A-A

Specifications
Current Rating:0.5Amp
Insulation Resistance:500MΩMin.
Dielectric Withstanding Voltage:200VAC
Contact Resistance:120mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

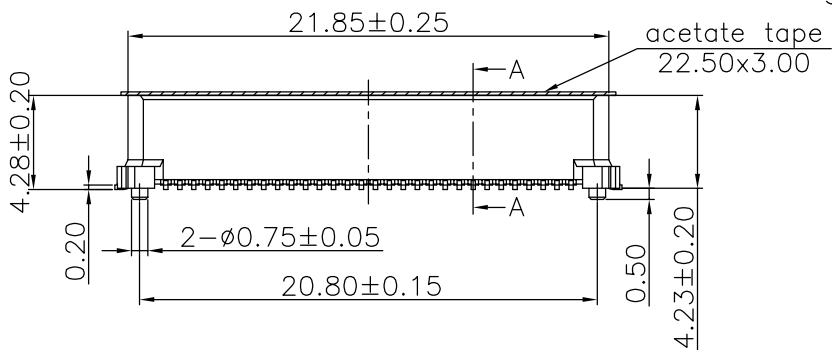

DETAIL B
2:1


Recommended P.C.Board Layout
(Tolerance:±0.05)

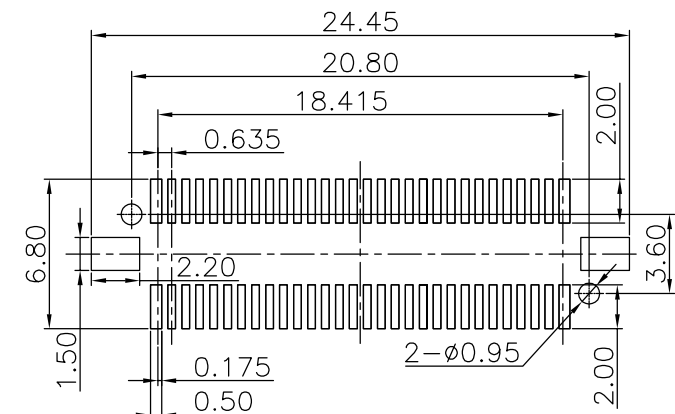

Ordering Information

XB-CGZC-201

No. Of Pins Per Row 30	Standard Plating 02=Gold Flash 09=3u"Au/Gold Flash	Color 1=Black	Standard Packing H=Acetate tape+Tape&Reel
---------------------------	--	------------------	--

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			3RD.ANG PROJ. 	GENERAL TOLERANCE X.*±5.0° X.±0.30 .X.*±3.0° .X.±0.25 .XX.*±2.0° .XX±0.15 .XXX.*±1.0° .XXX±0.10		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. XB-CGZC-201 PART NO. XB-CGZC-201	TITLE. 0.635mm PITCH BTB FLOATING CONNECTOR
REV. A	UNIT. mm	SCALE. 3:1	PAGE. 1/1						