
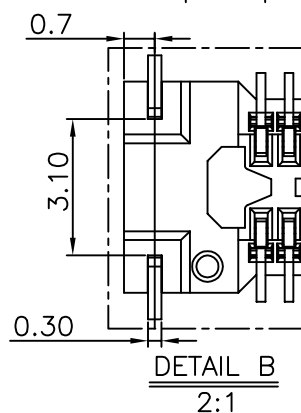

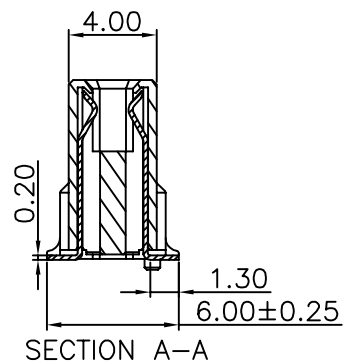



1 2 3 4 5 6 7 8 9

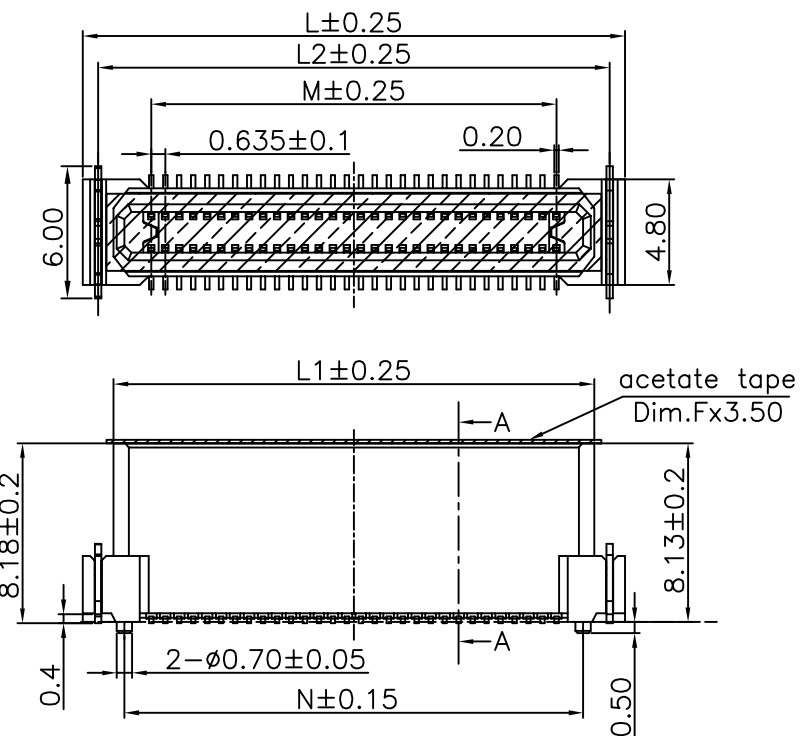

Specifications
Current Rating:0.5Amp
Insulation Resistance:500MΩMin.
Dielectric Withstanding Voltage:200VAC
Contact Resistance:100mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

No. of PIN/ROW	Dimension Information					
	L	L2	M	L1	N	F
2x30	24.65	23.25	18.42	21.85	20.80	22.50
2x40	31.00	29.60	24.77	28.20	27.15	28.80

Recommended P.C.Board
Layout
(Tolerance:±0.05)

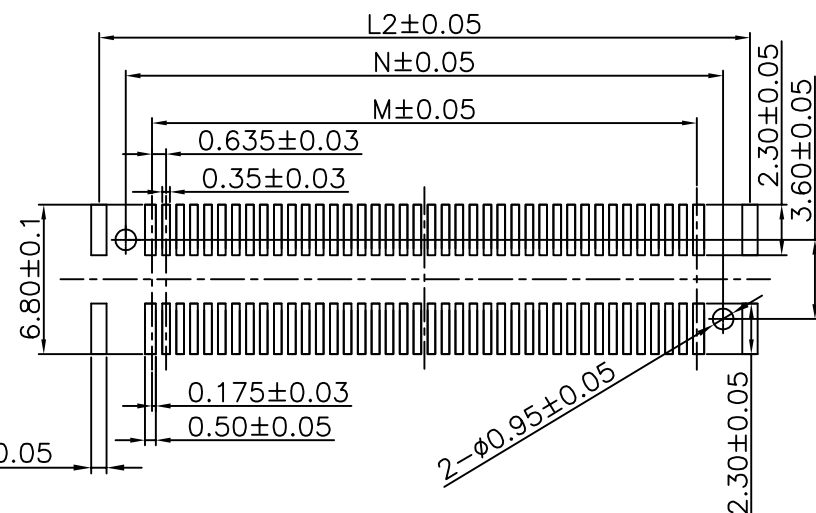

Ordering Information

XB-CGZC-202

No. Of Pins Per Row
30,40

Standard Plating
02=Gold Flash
09/N5=Au plating

Color
1=Black

Standard Packing
H=Acetate tape
+Tape&Reel

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
XB-CGZC-202
PART NO.
XB-CGZC-202

TITLE.
0.635mm PITCH BTB
FLOATING CONNECTOR

REV. B UNIT. mm SCALE. 3:1

1 2 3 4 5 6 7 8 9