




WITH CAP

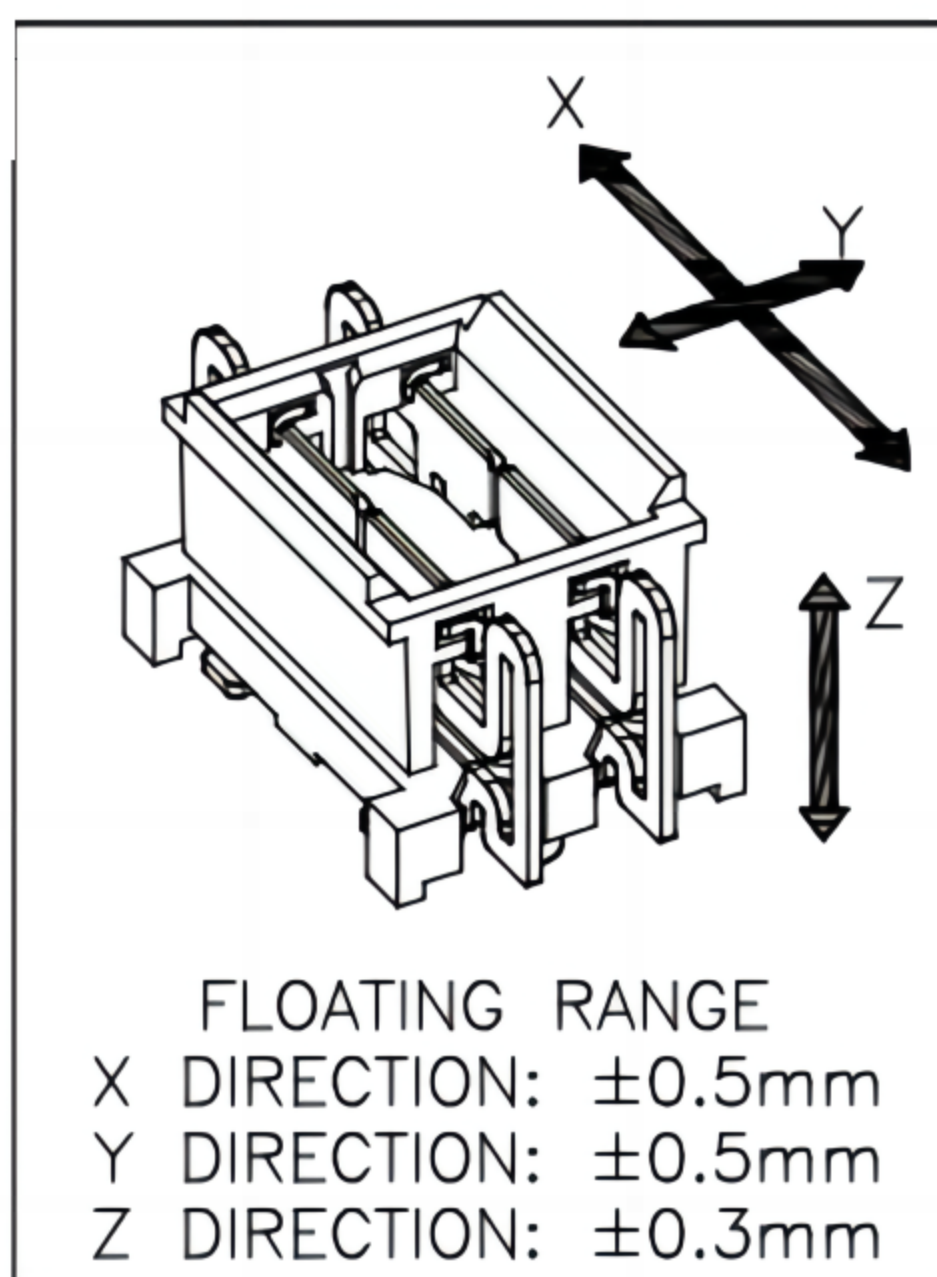

Specifications
 Current Rating:2.5Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:250VAC
 Contact Resistance:50mΩMax.
 Operating Temperature:−40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 ★All materials must meet GREENCONN hazardous substances control standards.
 ★: Critical Characteristics.
 indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
 ★: Safety Features
 indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

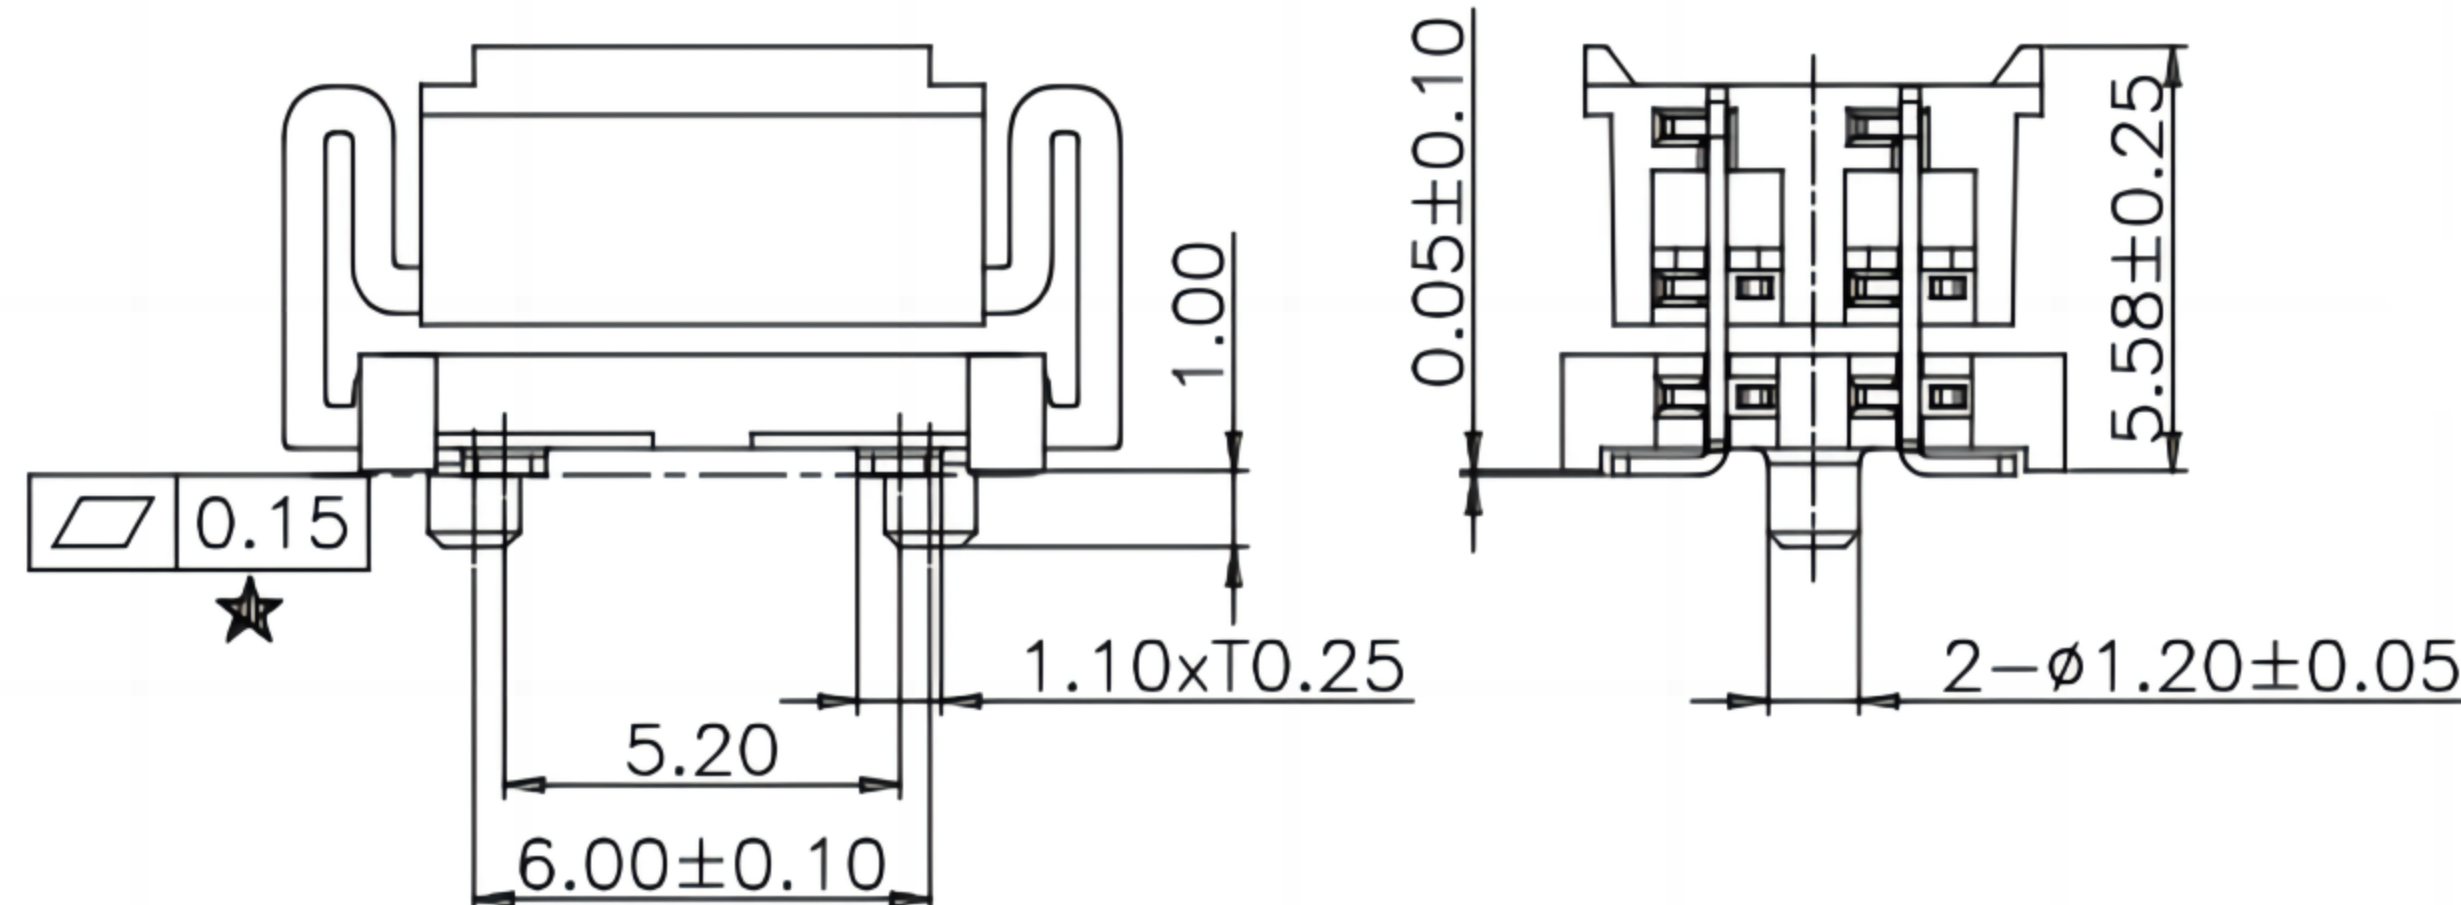

Recommended P.C.Board Layout
 (Tolerance:±0.05)

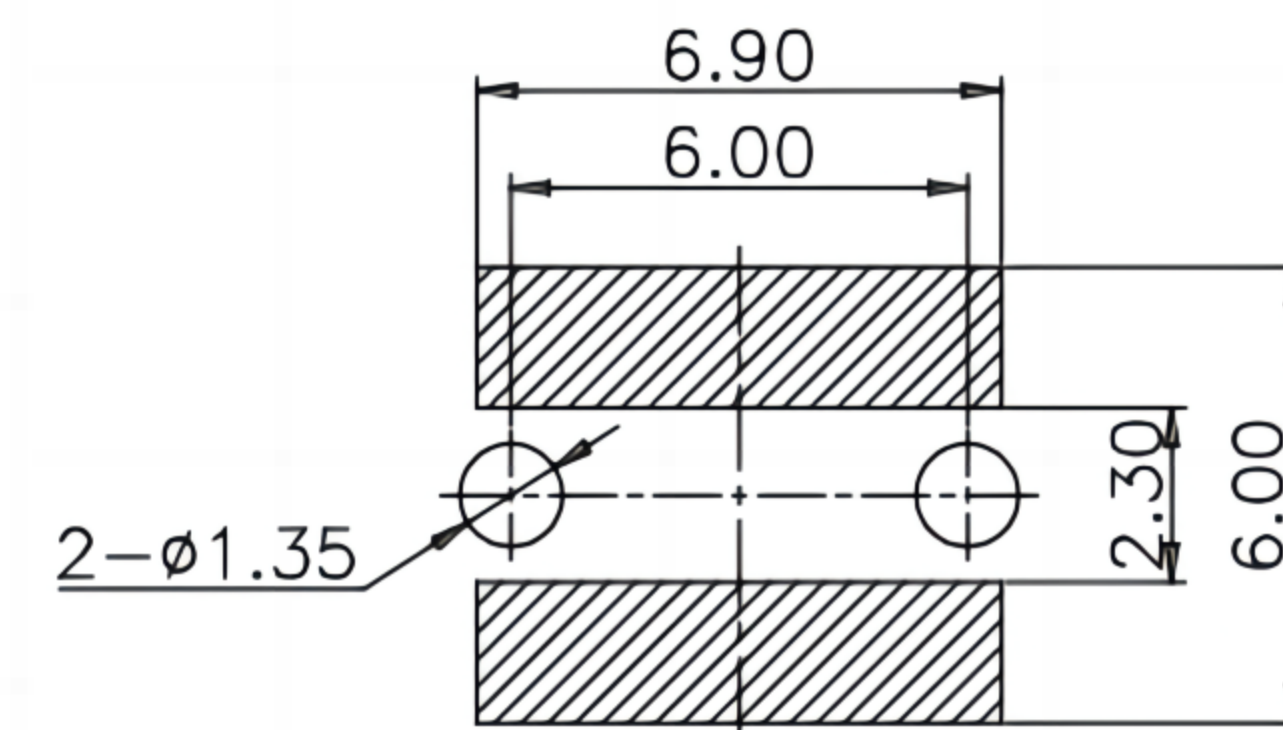

Ordering Information

G ZC202 - 02 02 B 001 C 1 S F

No. Of Pins Per Row 02
 Standard Plating 02=Gold Flash
 Color 1=Black
 Standard Packing F=Cap+Tape&Reel

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

3RD.ANG
 PROJ.
 PAGE. 1/1

GENERAL TOLERANCE
 X.*±5.0° X.±0.30
 .X*±3.0° .X±0.25
 .XX*±2.0° .XX±0.15
 .XXX*±1.0° .XXX±0.10

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 PART NO.

TITLE.
 2.54mm PITCH BTB
 FLOATING CONNECTOR