


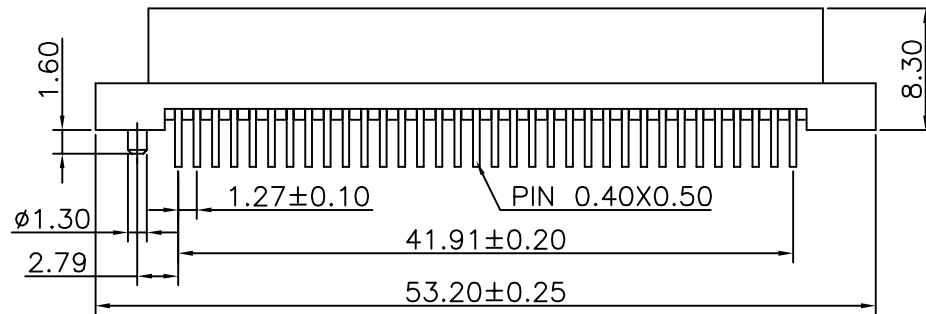
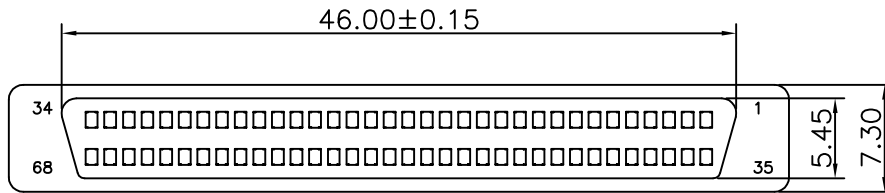


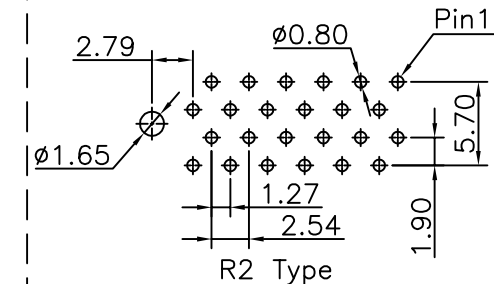

Specifications
Current Rating:1Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:
PBT(Not resistant to high temperature),
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V-0
All materials must meet Greenconn
requirement for environment protection.

Recommended P.C.Board
Layout
(Tolerance:±0.05)

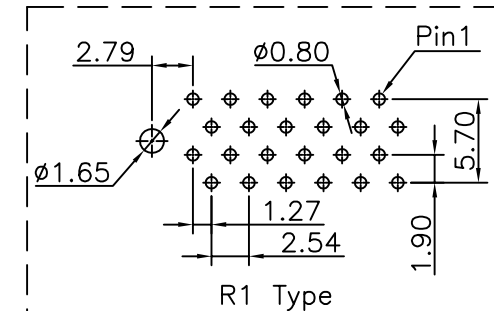

Ordering Information

XB-PM-A-127-210

Plastic specifications 1=Single row 2=Dual row 3=Tripe row 4=Quadruple		Water code No. of Pins per Row 34		Positioning column information A=No locating post B=Round post C=Square post		Pin length See the drawing		Color 1=Black 2=White 3=Yellow E=Beige		Packing code A=Box B=Tray C=Tube D=Tape&Reel E=Cap+Tube F=Cap+Tape&Reel G=Acetate Tape+Tube H=Acetate Tape+Tape&Reel	
				Plating code 01=Tin 02=Gold Flash 05=Gold Flash/Tin 22=Matte Tin		Insulator Material A=PBT R=Nylon(Halogen Free) C=LCP		Contact Material A/S/K/T=Phosphor Bronze			

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV.	UNIT.	SCALE.	PAGE.
01	mm	2:1	1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X.*±3.0°	.X.±0.25
.XX.*±2.0°	.XX±0.15
.XXX.*±1.0°	.XXX±0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	XB-PM-A-127-210
PART NO.	XB-PM-A-127-210

TITLE.	1.27 FEMALE HEADER DUAL ROWS DIP TYPE SCSI 68PIN W/POST
--------	---