
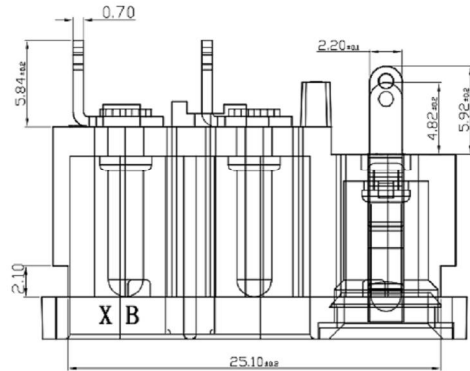
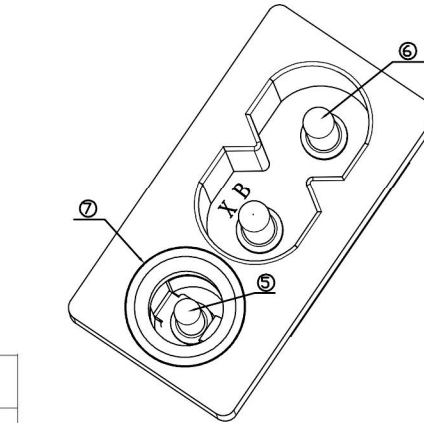
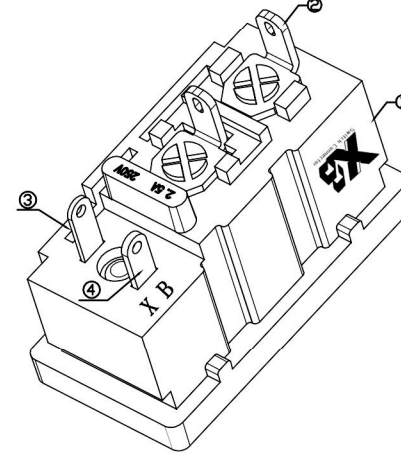

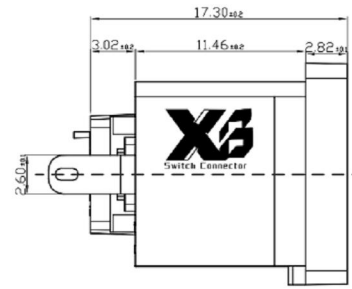
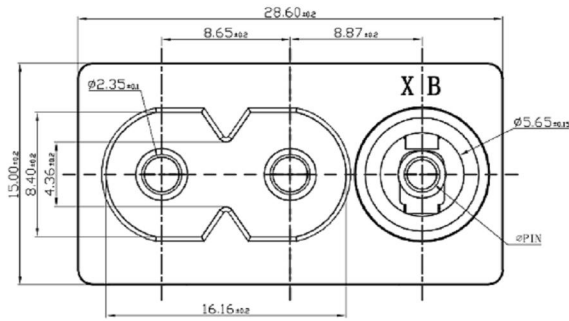
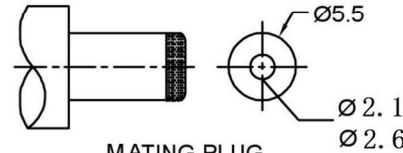



SCHEMATIC



MATING PLUG

DC JACK PIN针	φ2.0mm
CENTER PIN	φ2.5mm

DC插座技术参数 SPECIFICATION

- 1.Rating : DC 12V 30V , 30A 50A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

AC插座技术参数 SPECIFICATION

- 1.Rating : AC 250V 2.5A AC 125V 5A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

7	XB-AC+DC-0022F-07	铜套	1PCS	黄铜H59	镀锡
6	XB-AC+DC-0022F-06	圆针	2PCS	黄铜H65	镀锡
5	XB-AC+DC-0022F-05	圆针	1PCS	黄铜H65	镀锡
4	XB-AC+DC-0022F-04	4号脚	1PCS	C5210黄铜=0.6	镀锡
3	XB-AC+DC-0022F-03	3号脚	1PCS	C5191磷铜=0.4	镀锡
2	XB-AC+DC-0022F-02	2号脚	2PCS	C5210黄铜=0.7	镀锡
1	XB-AC+DC-0022F-01	基座	1PCS	PBT (BLACK)	白色
序号	零件图代号	名称	数量	材料	镀层/颜色

						东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD									
TITLE : XB DC Power Jack															
MODEL : XB-AC+DC-0022F DC插座合一AC插座八字尾															
UNIT : MM	DWN.	ZENQ. CHEN	DATE			TOLERANCE	ANGLE TOL	6	PIN	BRASS	1	Ni PLATED			
SCALE : 3 : 1	CHK'D	DONG. PANG	DATE			$\leq 1.5mm \pm 0.1$		5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED			
VERSION	01	APPD.	FET. LONG. HE	DATE		$> 1.5mm \pm 0.2$	$\pm 2^\circ$	4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED			
						$\geq 10.0mm \pm 0.3$		3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED			
								2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED			
								1	HOUSING	PBT UL94-V0	1	BLACK			
								NO.	PART NAME	MATERIAL	QTY.	FINISHING			