


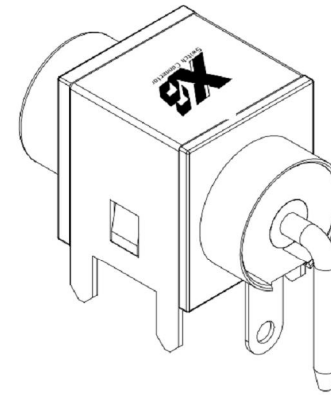
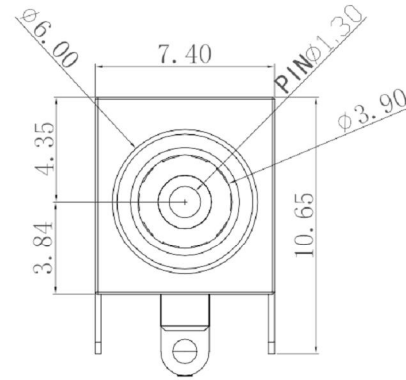





ROHS

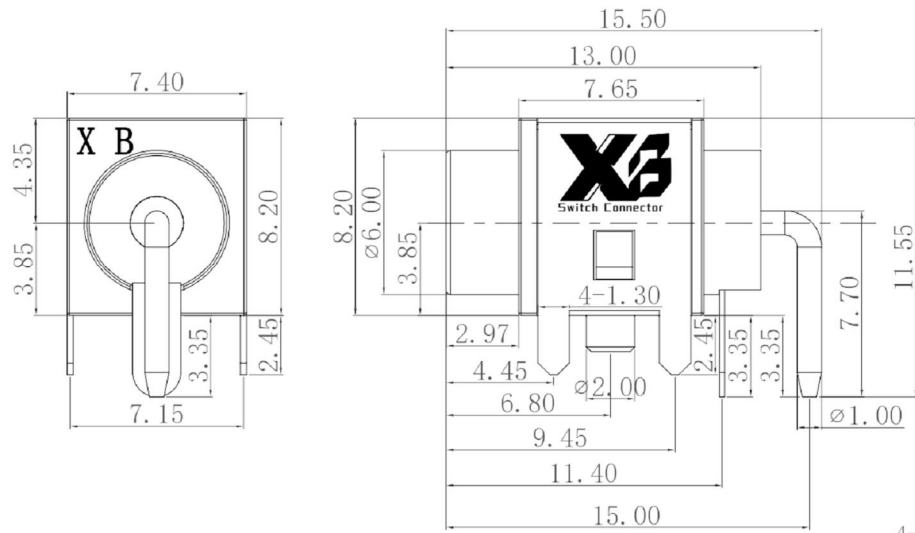


功能图

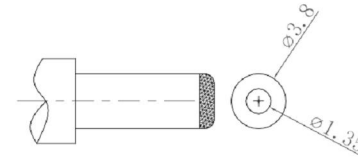

适配公头

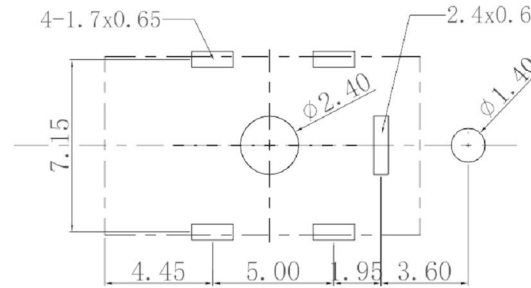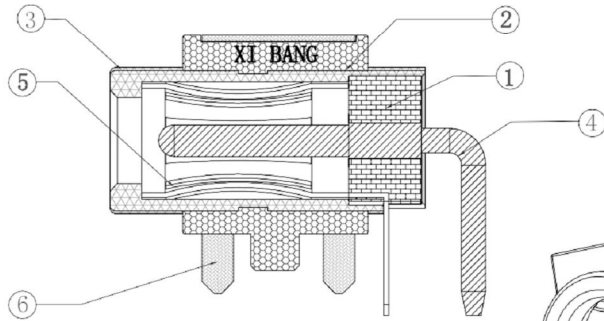

PCB板开孔尺寸

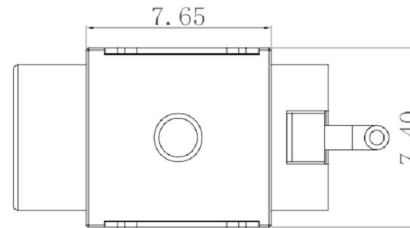

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.

SPECIFICATION

- Rating : DC 12V 30V , 30A 50A
- Contact resistance : $\leq 30m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles

6	外壳	1	铁	铜锡
5	4.8*14带尾弹圈	1	C5191	NI 1-3um
4	1.3*1.8*19.5*1.0退火针	1	C3604	NI 1-3um
3	6*13*3.9剖口管	1	C3604	NI 1-3um
2	注胶	1	PA	黑色
1	塑料	1	PBT	黑色
序号	名 称	数量	材 料	备 注

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD													
TITLE : XB DC Power Jack					TOLERANCE <=1.5mm ± 0.1 > 1.5mm ± 0.2 >=10.0mm ± 0.3		ANGLE TOL ± 2°		6 PIN		BRASS	1	Ni PLATED
MODEL : XB-DC-39135-W DC插座3513卧插7.4x15.5x8.2mm									5 TERMINAL		BRASS STRIP t=0.3	1	Ag PLATED
UNIT : MM		DWN.	ZENG. CHEN	DATE				4 SPRING TERMINAL C		PBS STRIP t=0.25	1	Ag PLATED	
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE				3 TERMINAL B		BRASS STRIP t=0.3	1	Ag PLATED	
VERSION		01	APPD.	FEI. LONG. HE	DATE			2 TERMINAL A		BRASS STRIP t=0.3	1	Ag PLATED	
								1 HOUSING		PBT UL94-V0	1	BLACK	
								NO. PART NAME		MATERIAL	QTY.	FINISHING	