


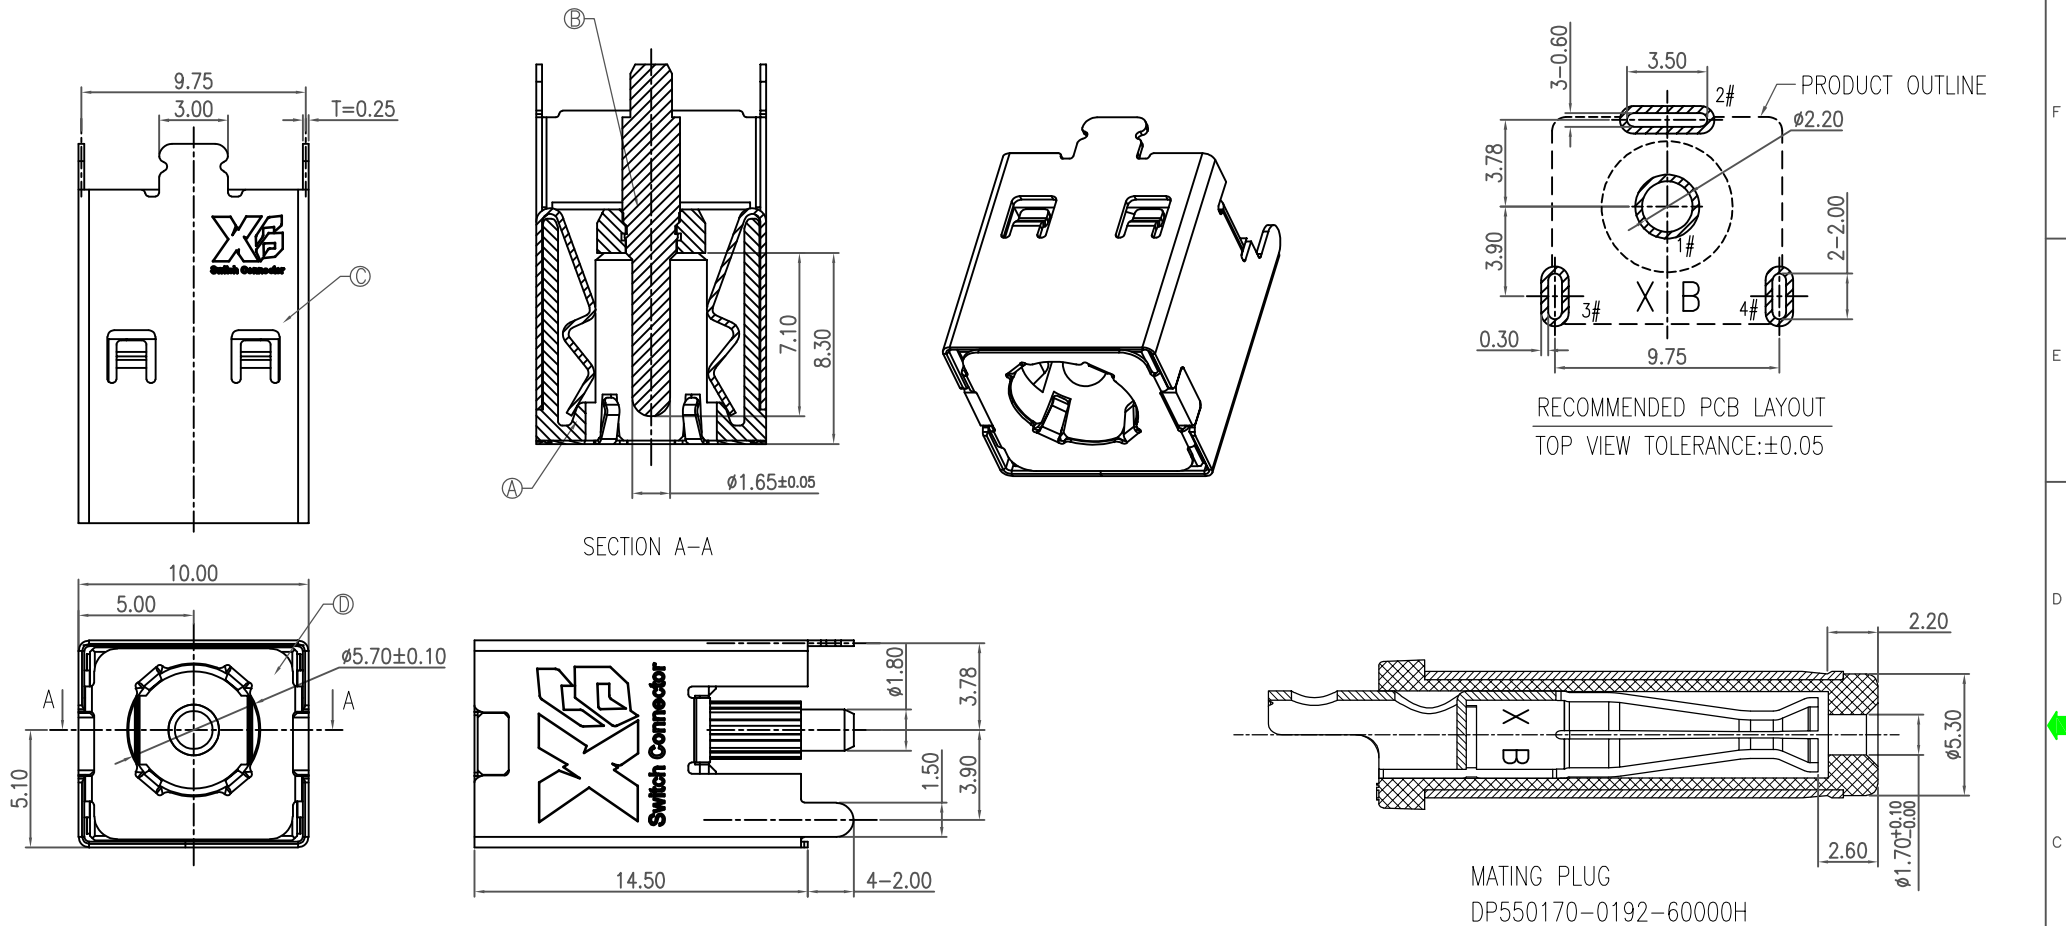

SPECIFICATION:

1. RATING: DC 20V 18A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

SCHEMATIC	
	1#(+)
	2#/3#4#(-)

E	COVER	HIGH TEMP.THERMOPLASTIC	BLACK				
D	GROUND	SUS 304		1			
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1			
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1			
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1			
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY			
UNLESS OTHERWISE SPECIFIED TOLERANCES		XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
DECIMALS:		ANGLES:		DESIGN:	GAO. PENG 2023.3.28	PART NAME: Φ5.5 立式(H=14.5) DC POWER JACK	
DIM	TOL	DIM	TOL	CHECK:		PART NO. XB-DC-550170-1699	
X.	±0.50	X.	±2°			SHEET: 1/2	REV.: A1
X.X	±0.30	X.X	±1°			DRAWING NO	
X.XX	±0.20	X.XX					
X.XXX	±0.10	X.XXX		APPROVED	HE. LONG. FEI 2023.3.28		
3RD ANGLE PROJECTION		UNIT: mm					

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------