


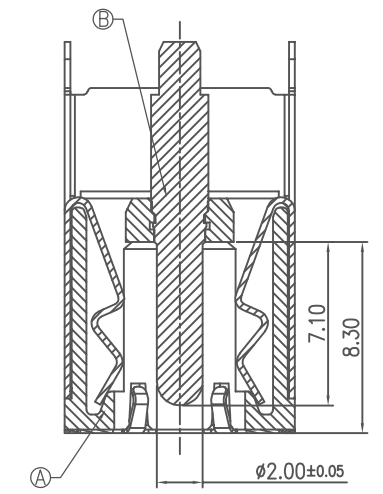
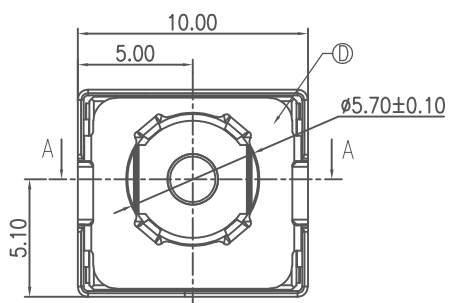
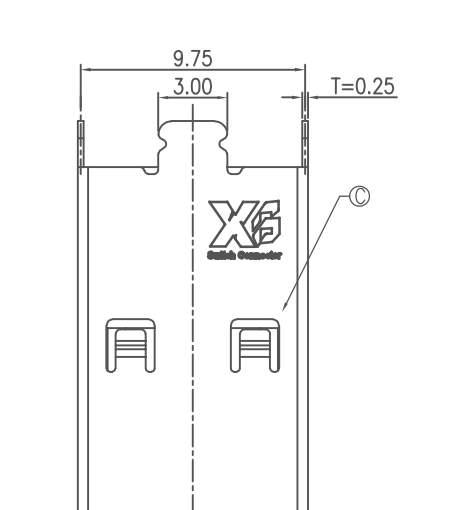
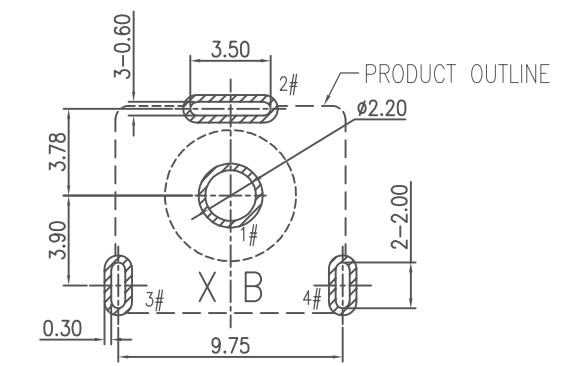


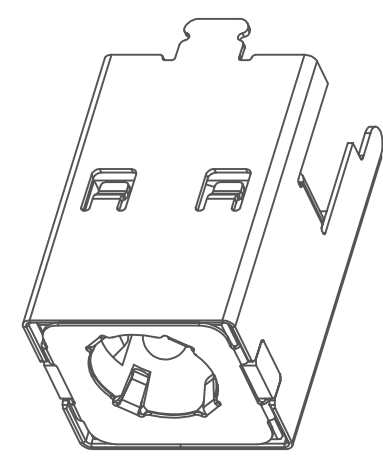

SECTION A-A

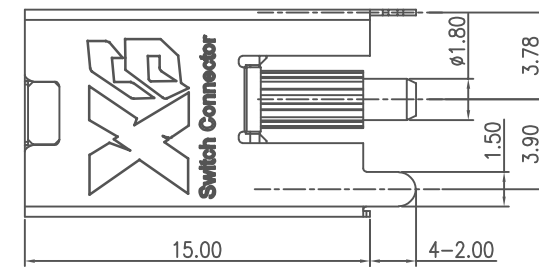


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

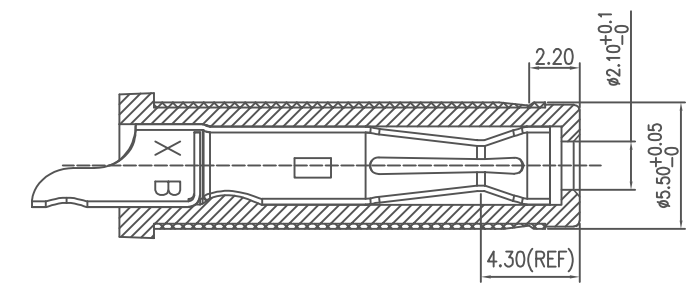

MATING PLUG
XB-DP550200-0129



- SPECIFICATION:
1. RATING: DC 20V 20A
 2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
 3. INSULATION RESISTANCE: 100 MΩ MIN.
 4. WITHSTAND VOLTAGE: 500 VAC
 5. INSERTION FORCE: 3N~30N
 6. EXTRACTION FORCE: 3N~30N
 7. DURABILITY: 5,000 CYCLES



E	COVER			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
DECIMALS:		ANGLES:	DESIGN:	PART NAME: Φ5.5 立式(H=15.0) DC POWER JACK PART NO. XB-DC-550200-1386 SHEET: 1/2 REV.: A1 DRAWING NO
DIM	TOL	DIM	TOL	
X.	±0.50	X.	±2°	
X.X	±0.30	X.X	±1°	
X.XX	±0.20	X.XX		APPROVED
X.XXX	±0.10	X.XXX		
3RD ANGLE PROJECTION		UNIT: mm	GAO. PENG 2023.3.28	HE. LONG. FEI 2023.3.28


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

拉出方向

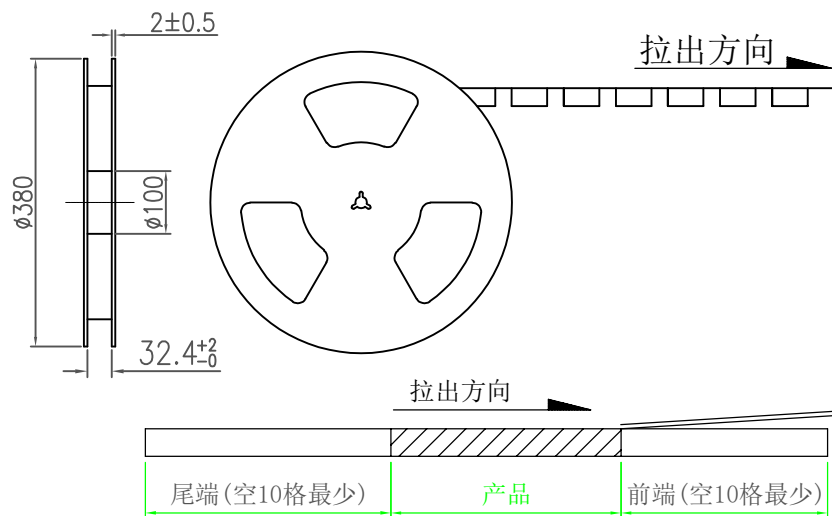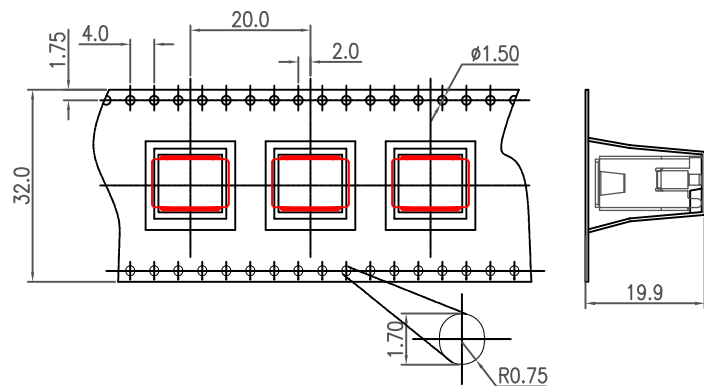

备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=385, W=385, H=380$
- 包装数量:
200PCS/卷, 10卷(2000PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ (10~70gf);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟.



包装盘标签

总共10层

PE袋:

外箱, 1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	± 0.50	X.	$\pm 2^\circ$
X.X	± 0.30	X.X	$\pm 1^\circ$
X.XX	± 0.20	X.XX	
X.XXX	± 0.10	X.XXX	

3RD ANGLE PROJECTION
UNIT: mm

DESIGN:	GAO. PENG 2023.8.15	PART NAME: DC POWER JACK 包装图
CHECK:		
APPROVED	HE. LONG. FEI 2023.8.15	PART NO. XB-DC-550200-1386
		SHEET: 1/1 REV.: A1
		DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------