


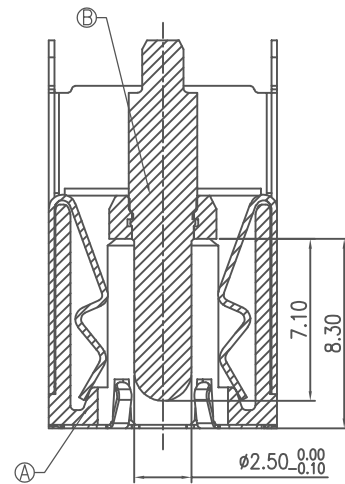
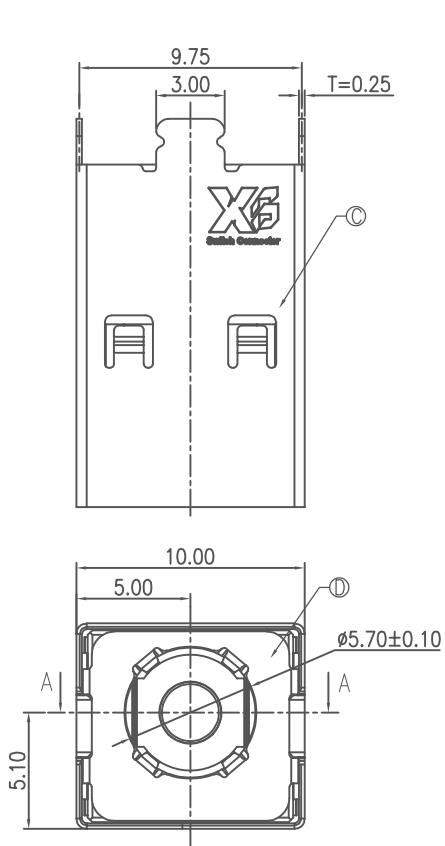
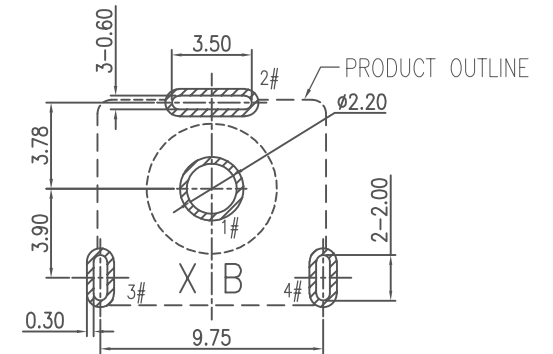


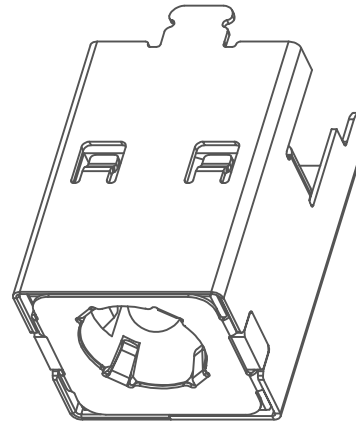

SECTION A-A

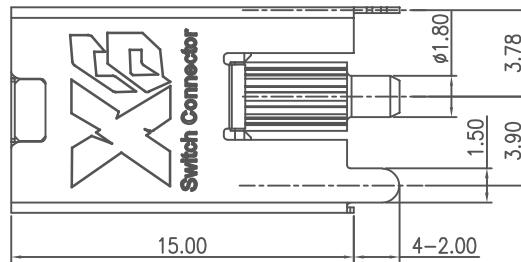


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

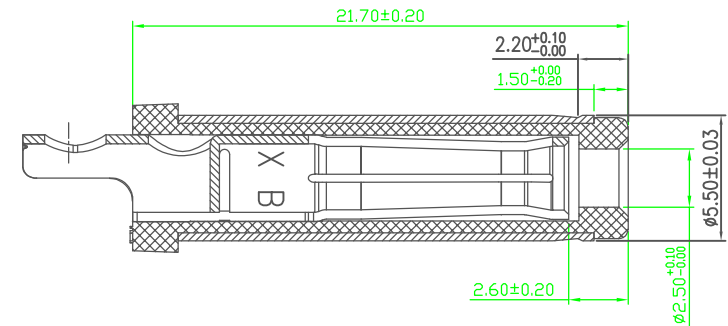

MATING PLUG
XB-DP550250-0188

SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES




E	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.



DECIMALS:		ANGLES:		DESIGN:	GAO. PENG 2023.3.28	PART NAME: Φ5.5 立式(H=15.0) DC POWER JACK			
DIM	TOL	DIM	TOL	CHECK:		PART NO. XB-DC-550250-1394			
X.	±0.50	X.	±2'			APPROVED	HE. LONG. FEI 2023.3.28	SHEET: 1/1	REV.: A1
X.X	±0.30	X.X	±1'						UNIT: mm
X.XX	±0.20	X.XX	////						
X.XXX	±0.10	X.XXX	////						

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

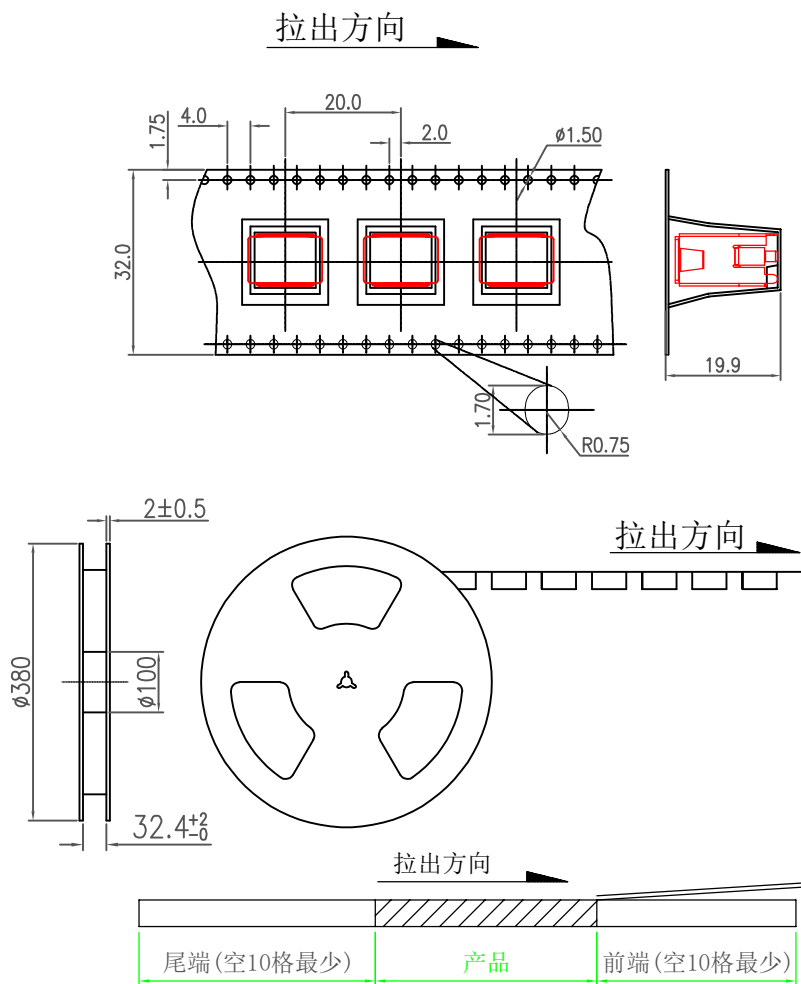


备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=385, W=385, H=380$
- 包装数量:
200PCS/卷, 10卷(2000PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ ($10\sim 70\text{gf}$);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟 .

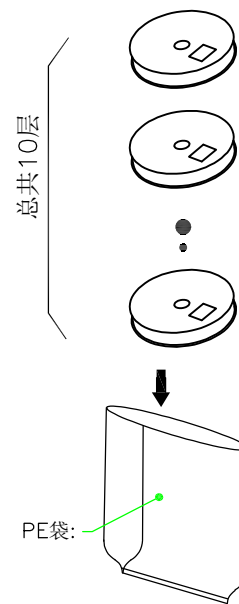

总共10层

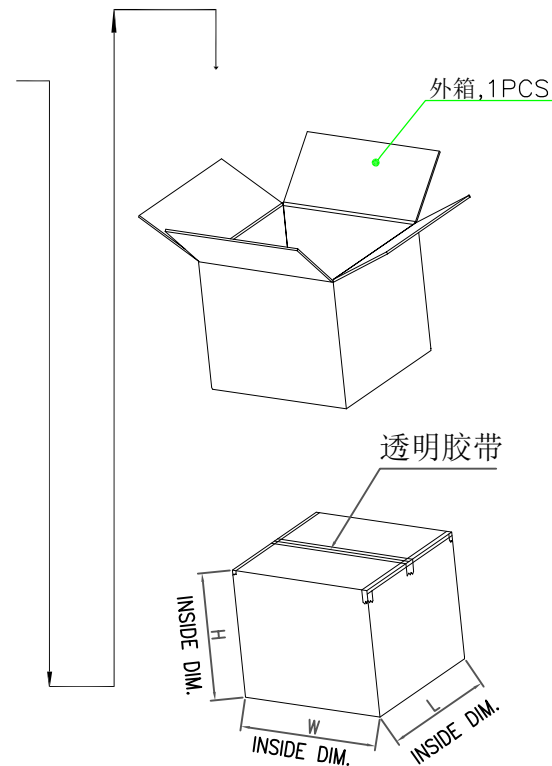

UNLESS OTHERWISE SPECIFIED TOLERANCES				XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DECIMALS:		ANGLES:		DESIGN:	GAO. PENG 2023.8.15
DIM	TOL	DIM	TOL	CHECK:	
X.	± 0.50	X.	$\pm 2^\circ$		
X.X	± 0.30	X.X	$\pm 1^\circ$		
X.XX	± 0.20	X.XX			
X.XXX	± 0.10	X.XXX			
3RD ANGLE PROJECTION				UNIT:	mm
				APPROVED	HE. LONG. FEI 2023.8.15
				PART NAME:	DC POWER JACK 包装图
				PART NO.	XB-DC-550250-1394
				SHEET: 1/1	REV.: A1
				DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------