
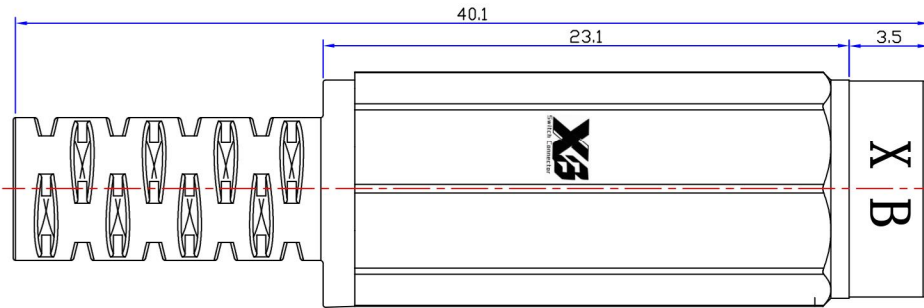
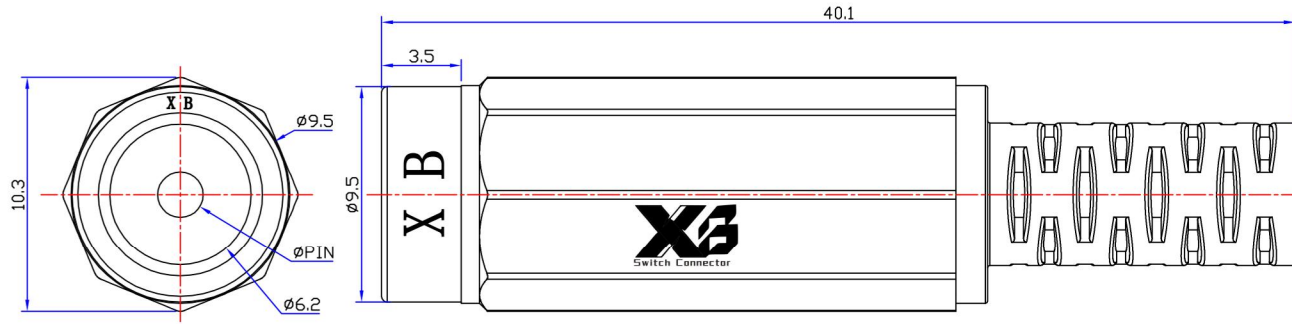


DC MATE PLUG

SCHEMATIC	1/4
	3
CENTER PIN	2.0mm
	2.5mm

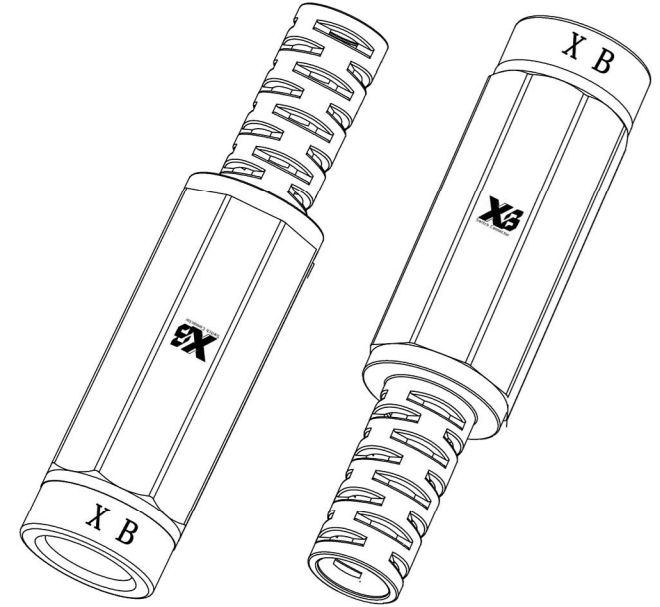

SPECIFICATION

1. Rating : DC 12V 30V , 30A 50A
2. Contact resistance : $\leq 30m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

6	XB-DC-9540-6	外塑座	1PCS	PA66	黑色
5	XB-DC-9540-5	塑料座	1PCS	PPA66	黑色
4	XB-DC-9540-4	4号脚	1PCS	H59-3黄铜	镀锡
3	XB-DC-9540-3	3号脚	1PCS	C5191磷铜=0.35	镀锡
2	XB-DC-9540-2	铜套	1PCS	H59-3黄铜棒	镀锡
1	XB-DC-9540-1	PIN	1PCS	H59-3黄铜棒	镀锡
序号	零件图代号	名称	数量	材料	镀层/颜色

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD				 							
		TITLE : XB DC Power Jack						6	PIN	BRASS	1	Ni PLATED	
		MODEL : XB-DC-9540						5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED	
								4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED	
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 ≥10.0mm ± 0.3	ANGLE TOL ± 2°	3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED	
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE				2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED	
VERSION		01	APPD.	FET. LONG. HE	DATE				1	HOUSING	PBT UL94-V0	1	BLACK
									NO.	PART NAME	MATERIAL	QTY.	FINISHING