

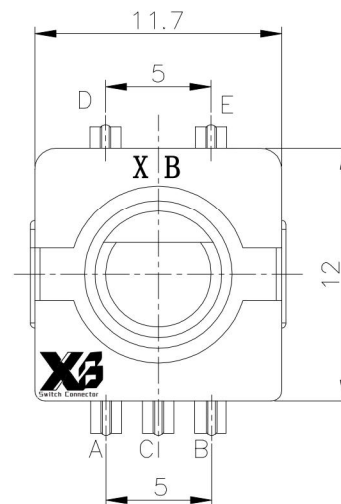
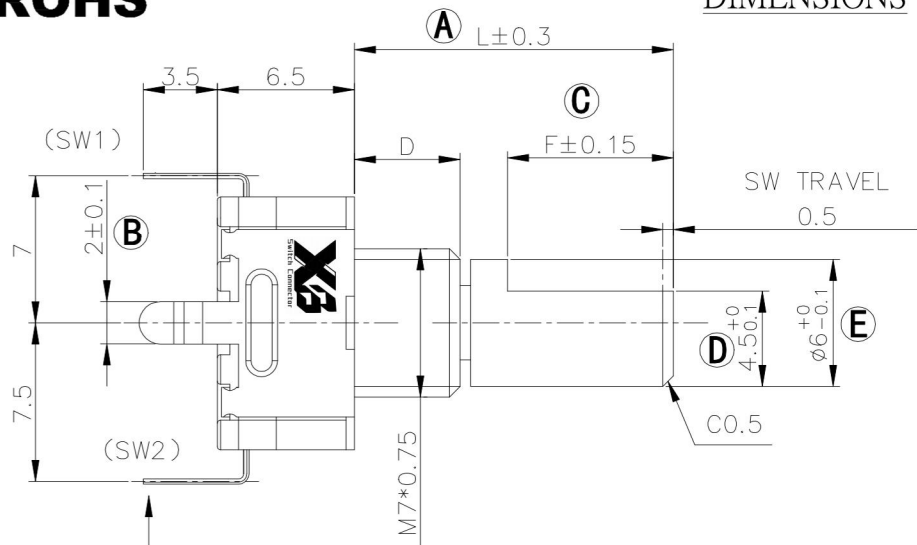
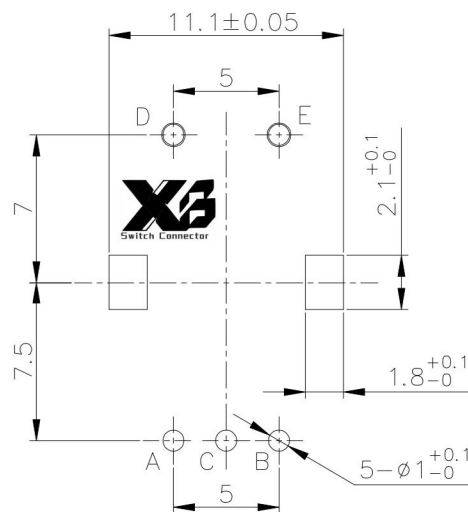


ROHS

DIMENSIONS

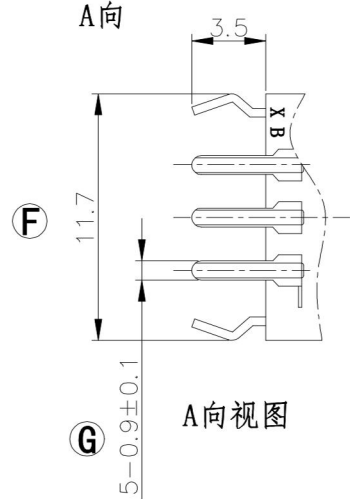

(SW02)CIRCUIT DIAGRAM




P. C. B MOUNTING HOLE DETAIL

(SW01) ENCODER

(SW02) PUSH ON SW

CLICK Position

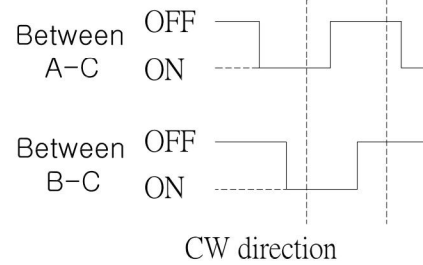

(SW01) OUTPUT

L	20
F	10

X		
2	D=5.0	
4	D=7.0	
1	D=10.0	

SPECIFICATION (INITIAL)

RATING: DC 5V 0.5mA 10mA

ANGLE: FULL ROTATION ANGLE: 360 DEGREES

CONTACT RESIS TANCE: 100mΩ max

INSULATION RESISTANCE: 100MΩ DC 250V 1mA

WITHSTAND VOLTAGE: 300V AC/min or

OPERATION FORCE: 6±3N 600gf±300gf

SWITCHING LIFE: 20,000 cycles

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY: GAO PENG 07/23/13
CHECKED BY: PANG DONG 07/23/13
APPROVED BY: HE. LONG. FEI 07/23/13

MAT'L		TITLE	ENCODER
FINISH		MODLE	ENCODER W/I SWITCH
SCALE	1 : 1	DWG NO.	XB-EC-11-0041
SHEET NO.	1 of 1	PART NO.	

SIZE A4
VER R2

2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012
ITEM NO.	DESCRIPTION	DRAWN	DATE