

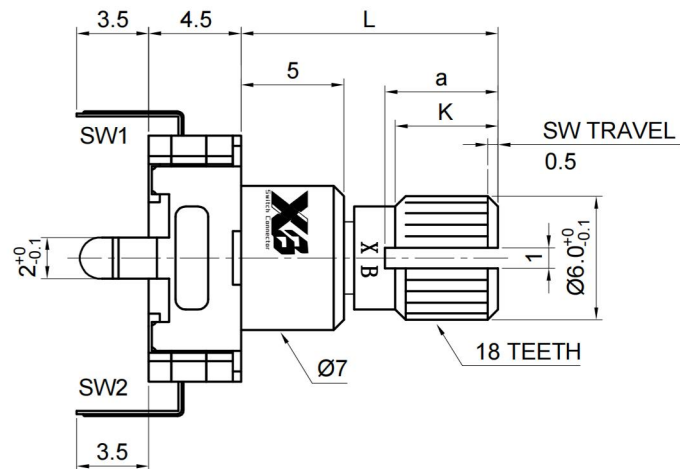


ROHS Dimensions 外形尺寸图

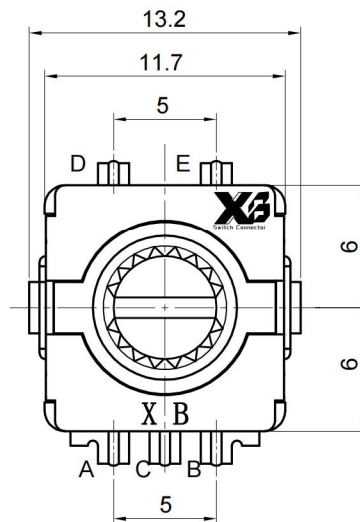


Mounting Hole Dimensions 安装孔尺寸

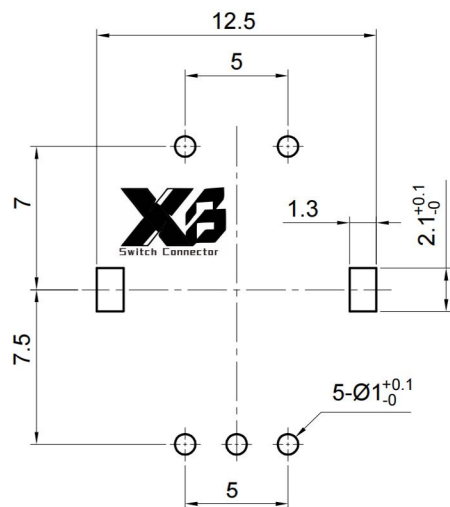

(SW01) ENCODER


(SW02) PUSH ON SW

CLICK Position

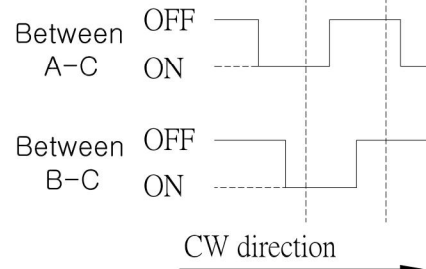

(SW01) OUTPUT

(SW02)CIRCUIT DIAGRAM



(SW1) 迴路图
SWITCH CIRCUIT

Shaft Type 轴心规格

K- TYPE 齿轴

X	L	K	a
10K4	10	4	4
12K5	12	5	5
12.5K5	12.5	5	5

Pulse And Detent 脉冲和定位

Y	15P30	20P20	20A20
---	-------	-------	-------

SPECIFICATION (INITIAL)

RATING: DC 5V 0.5mA 10mA
ANGLE: FULL ROTATION ANGLE: 360 DEGREES
CONTACT RESIS TANCE: 100mΩ max
INSULATION RESISTANCE: 100MΩ DC 250V 1mA
WITHSTAND VOLTAGE: 300V AC/min or
OPERATION FORCE: 6 ± 3N 600gf ± 300gf
SWITCHING LIFE: 20,000 cycles

XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY: GAO PENG	DATE: 07/23/13	MAT'L		TITLE	ENCODER
CHECKED BY: PANG DONG	DATE: 07/23/13	FINISH		MODLE	ENCODER W/I SWITCH
APPROVED BY: HE. LONG. FEI	DATE: 07/23/13	SCALE	1 : 1	DWG NO.	XB-EC-1101A-H01
		SHEET NO.	1 of 1	PART NO.	
					SIZE A4
					VER R2

2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012
ITEM NO.	DESCRIPTION	DRAWN	DATE