





ROHS

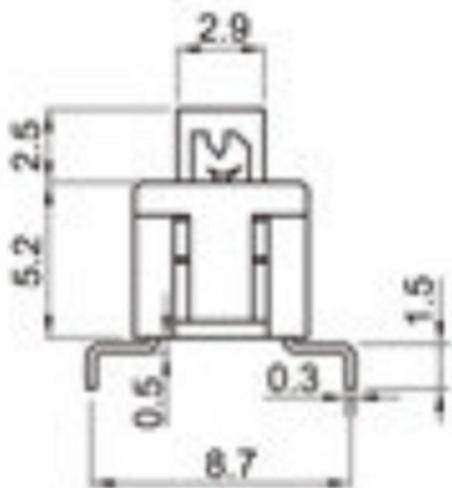

P.C.B LAYOUT
BOTTOM VIEW



SCHEMATIC (NON-SHORTING)

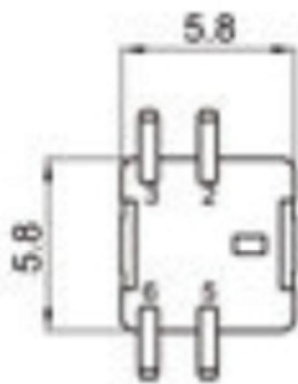

SPECIFICATION (INITIAL)

RATING:	DC 50V 0.5A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	160gf ±50gf
SWITCHING LIFE:	10K Cycles(6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD										
		TITLE : VERTICAL PUSH SWITCH				 						
		MODEL : XB-5858L-4P-D-WM										
UNIT : MM	DWN.	ZENQ. CHEN	DATE		TOLERANCE <=1.5mm ± 0.1 > 1.5mm ± 0.2 >=10.0mm ± 0.3	ANGLE TOL ± 2°	7	HOOK NEEDLE	STEEL WIRE	1	NATURAL	
SCALE : 2 : 1	CHK'D	PENG. GAO	DATE				6	SPRING	STEEL WIRE	1	NATURAL	
VERSION	01	APPD.	DONG. PANG	DATE				5	CONTACT	PBS	1	Ag PLATED
								4	TERMINAL	BRASS STRIP	6	Ag PLATED
								3	CASE	NYLON	1	BLACK
								2	COVER	NYLON	1	BEIGE
								1	KNOB	POM	1	WHITE
								NO.	PART NAME	MATERIAL	QTY.	FINISHING