

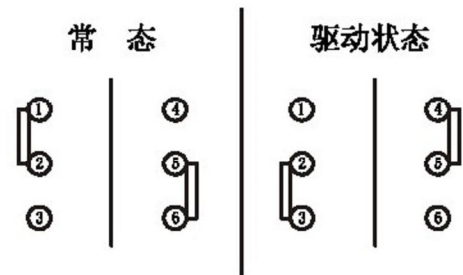



ROHS

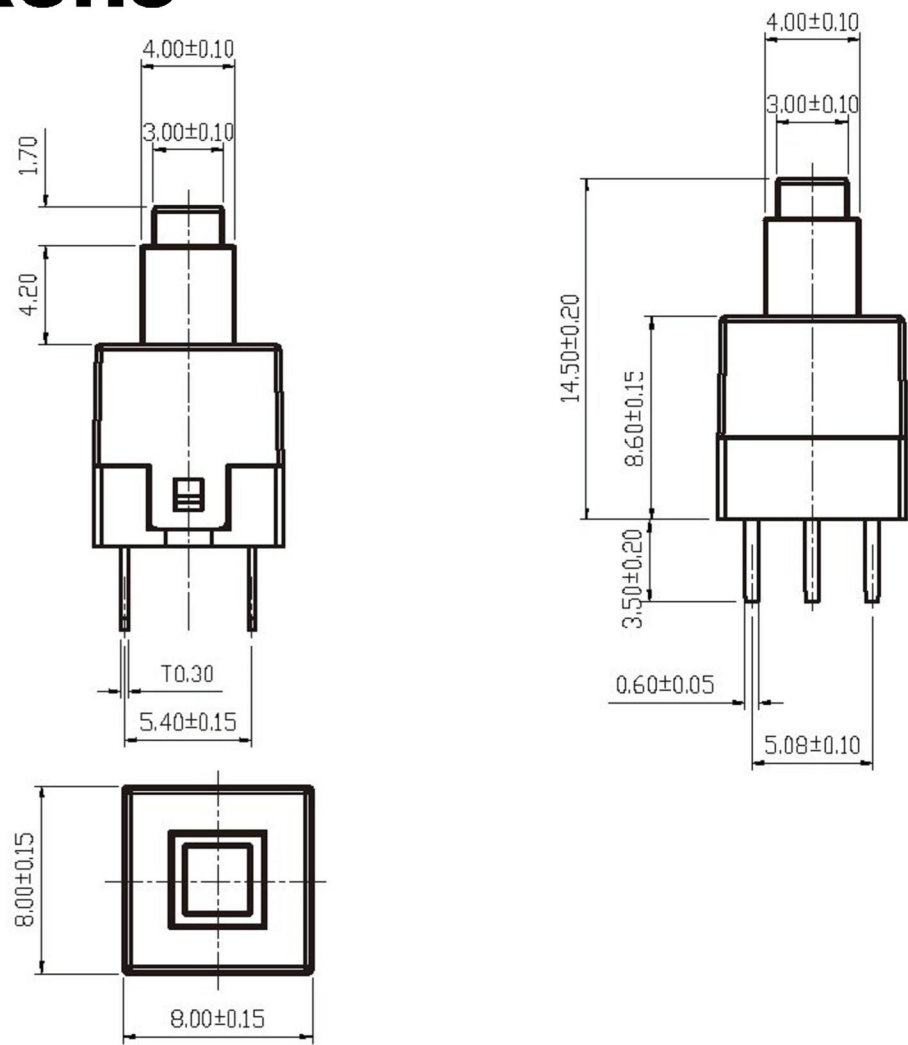

CIRCUIT DIAGRAM

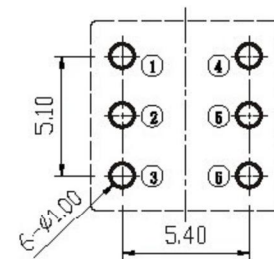


P.C.B INSTALLATION DIAGRAM

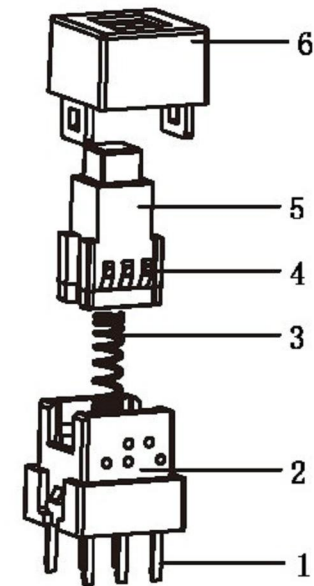

SPECIFICATION (INITIAL)

RATING:	DC 50V 0.5A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	160gf ±50gf
SWITCHING LIFE:	10K Cycles(6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector	东莞市溪榜电子有限公司										
	DONG GUAN XI BANG ELECTRONICS CO., LTD										
	TITLE : VERTICAL PUSH SWITCH					7	HOOK NEEDLE	STEEL WIRE	1	NATURAL	
	MODEL : XB-8080-L-145					6	SPRING	STEEL WIRE	1	NATURAL	
UNIT : MM	DWN.	ZENQ. CHEN	DATE	TOLERANCE ≤1.5mm ± 0.1 ＞ 1.5mm ± 0.2 ≥10.0mm ± 0.3	ANGLE TOL ± 2°	5	CONTACT	PBS	1	Ag PLATED	
SCALE : 2 : 1	CHK'D	PENG. GAO	DATE			4	TERMINAL	BRASS STRIP	6	Ag PLATED	
VERSION	01	APPD.	DONG. PANG			DATE	3	CASE	NYLON	1	BLACK
							2	COVER	NYLON	1	BEIGE
						1	KNOB	POM	1	WHITE	
						NO.	PART NAME	MATERIAL	QTY.	FINISHING	