
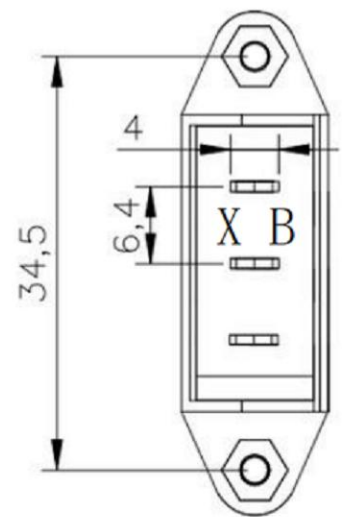
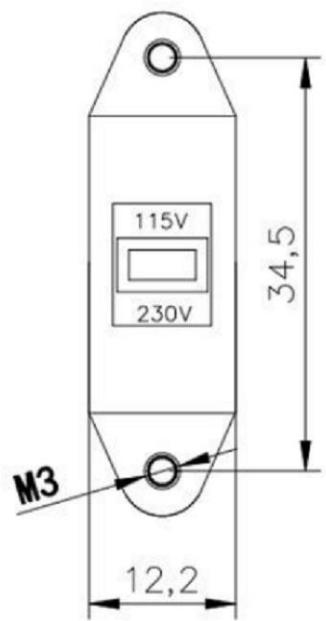
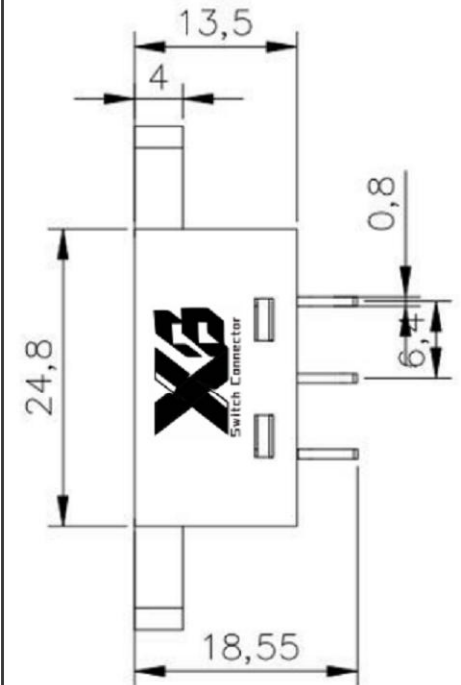



P.C.B LAYOUT
BOTTOM VIEW

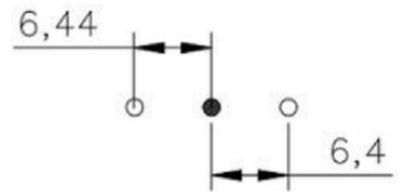

SCHEMATIC (NON-SHORTING)


开孔尺寸

The material contained in this drawing is the property of XiBang. Any use other than that specfically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

序号	名称	数量	材料
1	基座	1	PA66
2	推子	1	PA66
3	底板	1	PA66
4			
5	焊脚	6	黄铜电镀
6			
7	弹簧2	4	碳索钢丝
8	跳板	2	黄铜电镀

SPECIFICATION (INITIAL)

RATING:	5A 10A 125V 250V AC
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at1500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	300±100g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD				 						
TITLE : XB SLIDE SWITCH		TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3				ANGLE ±2°		7	SPRING	STEEL WIRE	1	NATURE
MODEL : XB-CH-Z01								6	STEEL BALL	STEEL	1	NATURE
UNIT : MM								DWN.	ZENQ. CHEN	DATE	5	BOARD
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE			4	CONTACT CLIP	PBS STRIP	2	Ag PLATED	
VBRION		01	APPD.	FEI. LONG. HE	DATE			3	FRAME	IRON STRIP	1	Ni PLATED
								2	TERMINAL	BRASS STRIP	8	Ag PLATED
								1	KNOB	POM	1	BLACK
								NO.	PART NAME	MATERIAL	QTY.	FINISHING