


线路图
CIRCUIT DIAGRAM




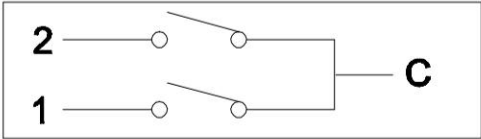


电流电路
CURRENT CIRCUIT

CIRCUIT:006

位置POSITION	电路CIRCUIT
1(INITIAL)起始	OFF
2	C+2
3	C+1+2



- 1.滑动开关型号 SLIDE SWITCH MODEL: KND-1-FS006-R2-1
2.焊线端子 SOLDER CONNECTOR TYPE;
单刀三掷, 多回路 SINGLE POLE THREE THROW, MULTI-CIRCUIT
3.额定值 RATING: 16(4)A 125/250VAC μ T105 (CQC;ENEC17;NEMKO;UL,KC)
10(2)A 125/250VAC μ T105 (UL)
7(2)A 125/250VAC μ T105 (UL)
10(2)A 125/250VAC μ T85 (CQC;ENEC17;NEMKO)
7(2)A 125/250VAC μ T85 (CQC;ENEC17;NEMKO)
4.接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
5.绝缘电阻 INSULATION RESISTANCE: $\geq$ 100M Ω (DC500V/1MIN)
6.介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN
7.机械寿命 MECHANICAL LIFE: >50000 CYCLES
8.电气寿命 ELECTRICAL LIFE: >10000 CYCLES
9.端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C, 3S
10.操作力 OPERATION FORCE:550 $\pm$ 150gf
11.所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

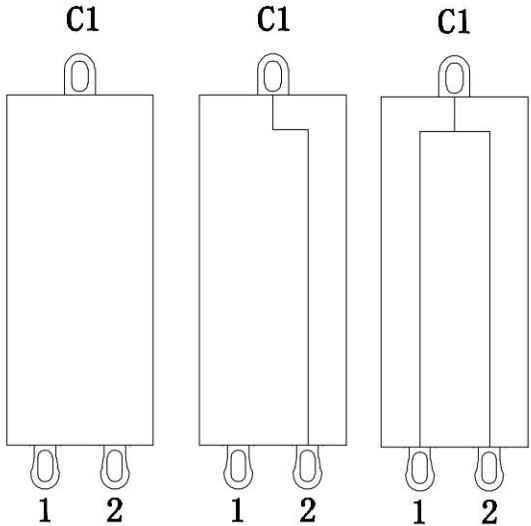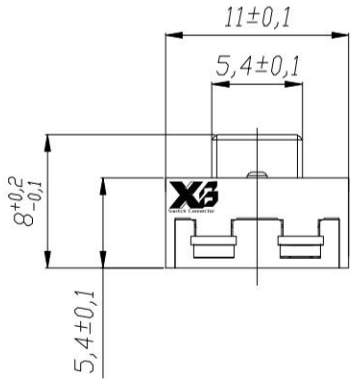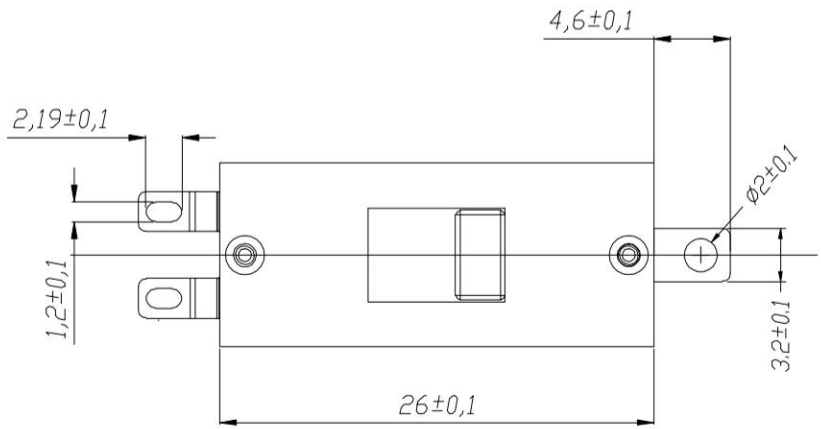


1档
(起始档)

2档

3档

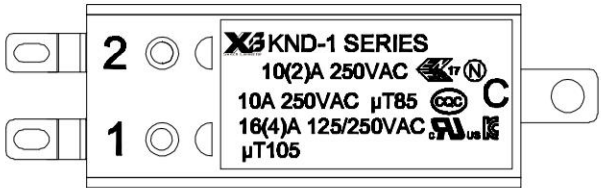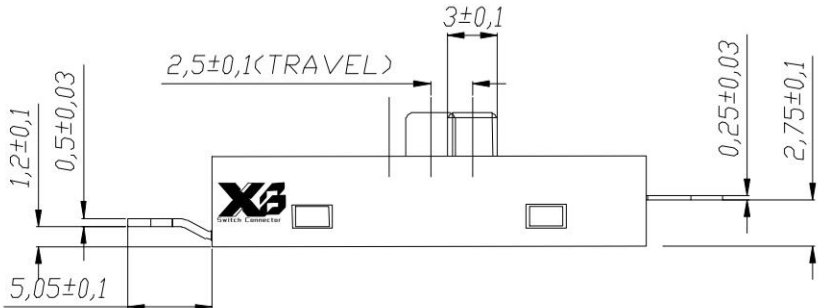

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD						TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3		ANGLE ±2°	
		TITLE : XB SLIDE SWITCH									
UNIT : MM		DWN.	ZENQ. CHEN	DATE		7 SPRING		STEEL WIRE	1	NATURE	
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE		6 STEEL BALL		STEEL	1	NATURE	
VERSION		01	APPD.	FEI. LONG. HE	DATE		5 BOARD		PHENOLIC RESIN	1	NATURE
							4 CONTACT CLIP		PBS STRIP	2	Ag PLATED
							3 FRAME		IRON STRIP	1	Ni PLATED
							2 TERMINAL		BRASS STRIP	8	Ag PLATED
							1 KNOB		POM	1	BLACK
							NO. PART NAME		MATERIAL	QTY.	FINISHING