


ROHS

2.5MM立体5.0盘带壳

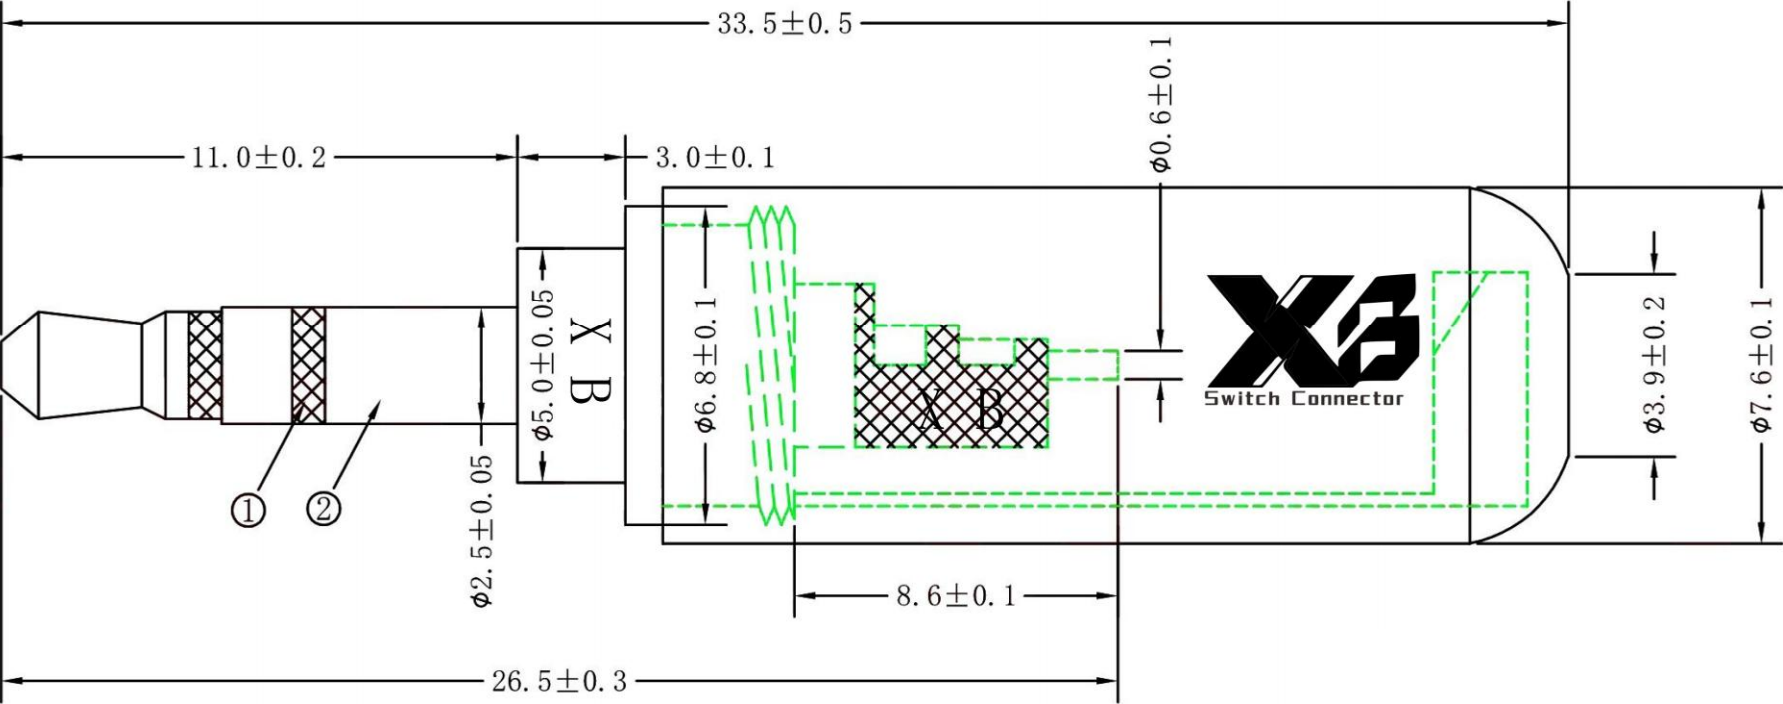

SPECIFICATION

- 1.Rating : DC 30V 0.5A ; 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles .

2	BRASS	NICKEL
1	POM	BLACK
NO	MATERIAL	DISPOSE

	东莞市溪榜电子有限公司													
	DONG GUAN XI BANG ELECTRONICS CO.,LTD													
	TITLE : XB Audio Plug													
MODEL : XB-P2503-L33 2.5三节 焊盘5.0带金属壳														
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE <=1.5mm ± 0.1 > 1.5mm ± 0.2 >=10.0mm ± 0.3	ANGLE TOL ± 2°							
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE				2	TERMINAL	PBS STRIP	5	Ag PLATED		
VERSION 01		APPD.	FEI. LONG. HE	DATE				1	HOUSING	PBT	1	BLACK		
										NO.	PART NAME	MATERIAL	QTY.	FINISHING