


ROHS

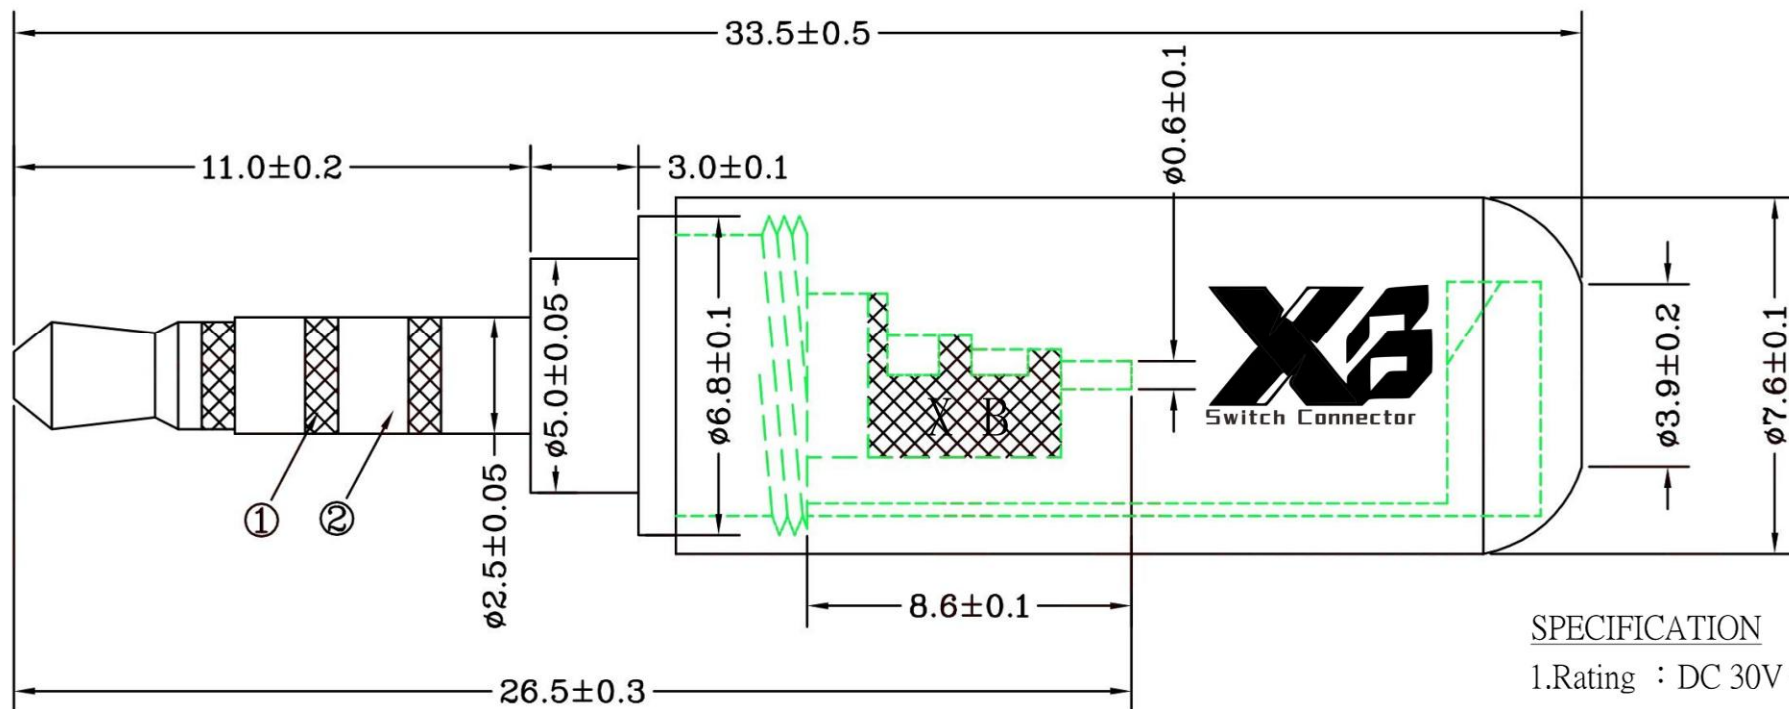

SPECIFICATION

1. Rating : DC 30V 0.5A ; 1.0A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles °

2.5mm四级5.0盘带壳


②	BRASS	NI/AU
①	POM	BLACK
序号	MATERIAL (材料)	DISPOSE (处理)



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB Audio Plug

MODEL : XB-P2504-L33 2.5四节带金属护套



UNIT : MM		DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE	
VERSION	01	APPD.	FEI. LONG. HE	DATE	

TOLERANCE

<-1.5mm	± 0.1
> 1.5mm	± 0.2
>=10.0mm	± 0.3

ANGLE TOL
 $\pm 2^\circ$

2	TERMINAL	PBS STRIP	5	Ag PLATED
1	HOUSING	PBT	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING